

Service
Service
Service



Service Manual

Horizontal Frequency
30KHz-83KHz

TABLE OF CONTENTS

Description	Page	Description	Page
Table Of Contents.....	1	6.Schematic.....	19
Important Safety Notice.....	2	6.1 Main Board.....	19
Revision List.....	3	6.2 Power Board.....	25
1.Product Feature.....	4	6.3 Audio Board.....	27
2.LCD Monitor Description.....	6	7.PCB Layout.....	28
3.Operation Instruction.....	7	7.1 Main Board.....	28
3.1 General Instructions.....	7	7.2 Power Board.....	31
3.2 Control Buttons.....	7	7.3 Key Board.....	33
3.3 Adjusting the Picture.....	8	7.4 Audio Board.....	33
4.Input/Output Specification.....	11	8.Maintainability.....	34
4.1 Input Signal Connector.....	11	8.1 Equipments and Tools Requirement.....	34
4.2 Factory Preset Display Modes.....	11	8.2Trouble Shooting.....	34
4.3 Power Supply Requirement.....	12	9.White-Balance, Luminance adjustment.....	40
4.4 Panel Specification.....	13	10. Monitor Exploded View.....	41
5. Block Diagram.....	15	11.BOM List.....	42
5.1 Software Flow Chart.....	15	12.Different Parts List.....	84
5.2 Electrical Block Diagram.....	17		

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiation when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

Revision List

[illegible]

1. Monitor Specifications

LCD Panel	• Type: TFT Active Matrix Color LCD • Size: 17.0 in (43.2 cm) • Viewable size: 17.0 in (43.2 cm) • Pixel pitch: 0.264 mm (H) x 0.264 mm (V) • Viewing angles: 140°(H) 140°(V) (Typical) • Response time: 16 ms (Typical) • Native panel resolution: 1280 x 1024 • Contrast ratio: 450:1 (Typical) • Brightness: 260 nits (Typical)
Scan Range	• H-Frequency: 30 kHz to 83 kHz • V-Frequency: 55 Hz to 75 Hz
Dot Clock	• 140 MHz
Recommended Viewing Resolutions	• Minimum: 640 x 480 @ 60 Hz • Nominal: 1280 x 1024 @ 60 Hz • Maximum: 1280 x 1024 @ 75 Hz
Maximum Resolution	• 1280 x 1024
Display Colors	• 16.2 million colors (Simulated)
Plug and Play	• VESA DDC1/2B™
EPA ENERGY STAR®	• On Mode: ≤45 W • Active Off Mode: ≤3 W
Input Connector	• 15-pin D-Sub
Input Video Signal	• Analog: 0.7 Vp-p (standard) • 75 OHM • Positive


Power Source – Integrated Power Supply	• AC Source: 100 to 240 VAC 50/60 Hz
Environmental Considerations	• Operating Temp: 41°F to 95°F (5°C to 35°C) • Storage Temp: -4°F to 140°F (-20°C to 60°C) • Operating Humidity: 10% to 85%
Weight	• Shipping: 15.4 lb (7.0 kg) • Display Only: 12.6 lb (5.1 kg)
Dimensions	• 407(W) x 436(H) x 173(D) mm
Regulatory Compliance	• UL, CSA, FCC, GS/TUV, CE
Audio Specifications	• 2 – 1W Speakers located in the bezel • Volume control in OSD • Line in connection on rear of display.

2. LCD Monitor Description

The LCD monitor will contain a main board, a power board, a key board and an audio board which house the flat panel control logic, brightness control logic and DDC.

The Inverter board will drive the backlight of panel and DC-DC conversion.

Monitor Block Diagram

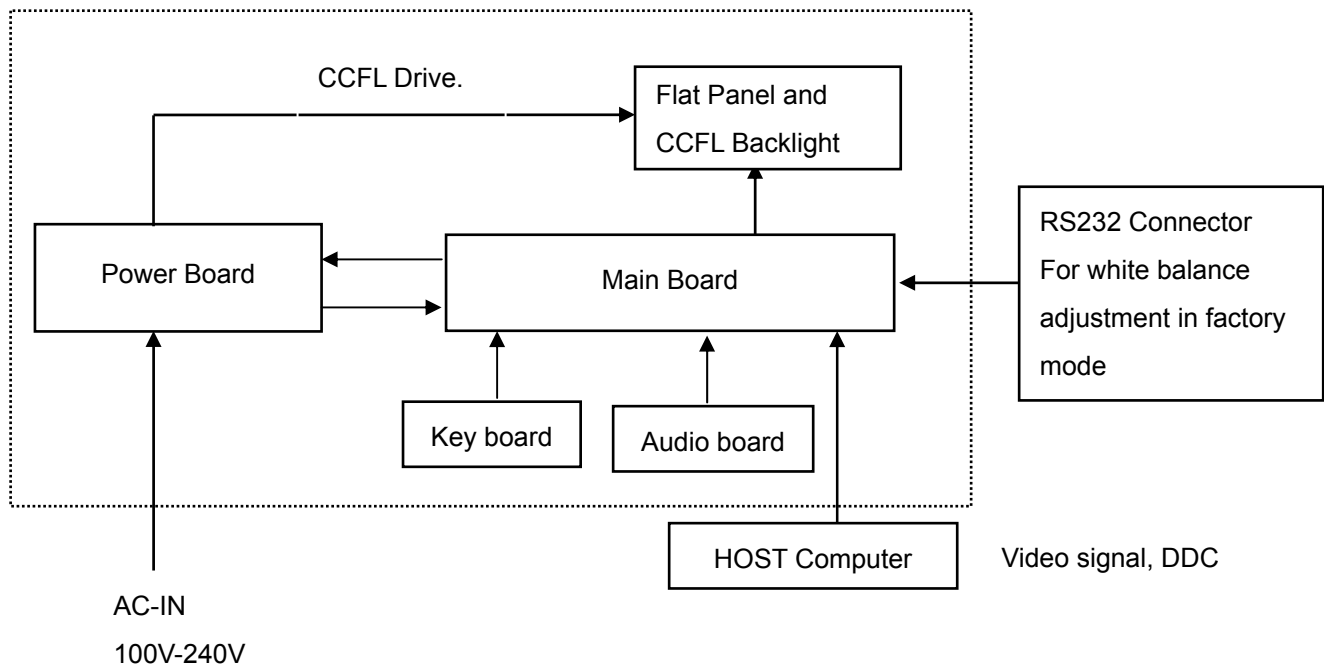

3. Operating Instructions


3.1 General Instructions

Press the power button to turn the monitor on or off. The other control buttons are located at front panel of the monitor. By changing these settings, the picture can be adjusted to your personal preferences.

- The power cord should be connected.
- Connect the video cable from the monitor to the video card.
- Press the power button to turn on the monitor position. The power indicator will light up.

3.2 Front Panel Control

External Controls

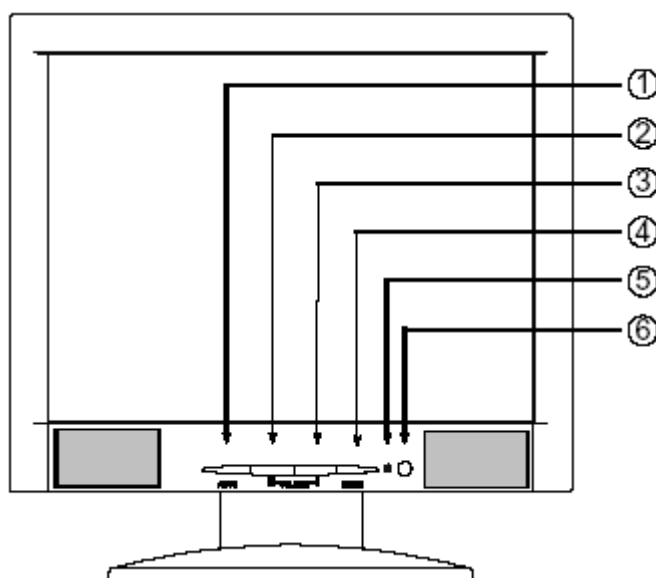

Feature		Description
1	Auto Config/Exit	The Auto Config button is used to automatically set the H-Pos, V-Pos, Clock, and Focus. Press and hold this button for two seconds to begin the auto config cycle. This also acts as the Exit button. Press it to close the On Screen Display (OSD) menu. This will also back out of a menu selection.
2	Volume Down / ◀	Press this button to decrease the speaker volume. If the OSD is open, this button will move through the selections in a counter-clockwise direction.
3	Volume Up / ▶	Press this button to decrease the speaker volume. If the OSD is open, this button will move through the selections in a clockwise direction.
4	Menu/Enter	Press this button to open the OSD menu or to select an adjustment icon within the OSD.
5	Power Indicator	Power Indicator: Green = power on mode (normal operation) Orange = low power mode (low power consumption; no picture)
6	Power Button	Press this button to turn the monitor on and off.

NOTES


- Do not install the monitor in a location near heat sources such as radiators or air ducts, or in a place subject to direct sunlight, or excessive dust or mechanical vibration or shock.
- Save the original shipping carton and packing materials, as they will come in handy if you ever have to ship your monitor.
- For maximum protection, repackage your monitor as it was originally packed at the factory.
- To keep the monitor looking new, periodically clean it with a soft cloth. Stubborn stains may be removed with a cloth lightly dampened with a mild detergent solution. Never use strong solvents such as thinner, benzene, or abrasive cleaners, since these will damage the cabinet. As a safety precaution, always unplug the monitor before cleaning it.

3.3 Adjusting the Picture

1. Press the MENU-button to activate the OSD window.
2. Press ◀ or ▶ to button to locate the desired function.
3. Press the menu button to select the function that you want to adjust.
4. Press ◀ or ▶ to button to change the settings of the current function.

When the OSD window is active, it shows the input signal timing. The H stands for the horizontal frequency and the Vertical frequency.

To exit and save, select the exit functions, or leave the monitor alone for 10 seconds. if you want to adjust any other function, request steps2-4

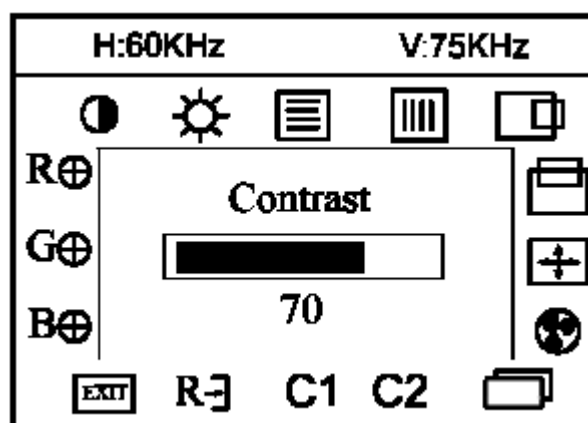

THE DESCRIPTION FOR CONTROL FUNCTION:


Function	Icon	Description
Contrast		Use this function to adjust the picture's contrast.
Brightness		Use this function to adjust the picture's brightness.
Focus		Use this function to adjust the picture's focus. Focus adjusts the phase of the pixel clock signal. With a wrong phase adjustment, the picture has horizontal disturbances or lines in a bright picture.
Clock		Use this function to adjust the picture's clock. Clock (pixel frequency) controls the number of pixels scanned by one horizontal sweep. If the frequency is not correct, the screen shows vertical stripes and the picture will not be the correct width.
H-Position		Use this function to adjust the picture's horizontal position.
V-Position		Use this function to adjust the picture's vertical position.
Auto Center		Use this function to automatically center the picture in the display area. This will not adjust the Clock and Focus controls.
Language		Use this function to select which language the monitor will use to display the instructions.
DOS Mode Select		Use this function to switch the default DOS mode between 640 x 400 @ 70 Hz and 720 x 400 @ 70 Hz.
Color Adjustment	C2	Use this option to set the color to a cool white setting that is better for viewing text. This setting has less RED than the C1.
Color Adjustment	C1	Use this option to set the color to a warm white setting. This setting has more RED than the C2 setting and is better for viewing pictures.

Reset	R↵	Use this function to clear each old status of auto-configuration and to redo auto-configuration.
Exit	EXIT	Use this feature to save your selections and adjustments and to exit the OSD menu.
Blue	B⊕	Use this function to adjust the picture's blue intensity.
Green	G⊕	Use this function to adjust the picture's green intensity.
Red	R⊕	Use this function to adjust the picture's red intensity.

Accessing the Volume Controls


The following list explains how to access and use the volume controls appearing in the On Screen Display (OSD) Main Menu:

- 1 Press the ◀ or ▶ buttons to activate the volume function. The display will look like Figure 6.
- 2 Adjust the volume to the desired level. Keep in mind that the system volume is available as well. If mute is desired, set the volume to zero.

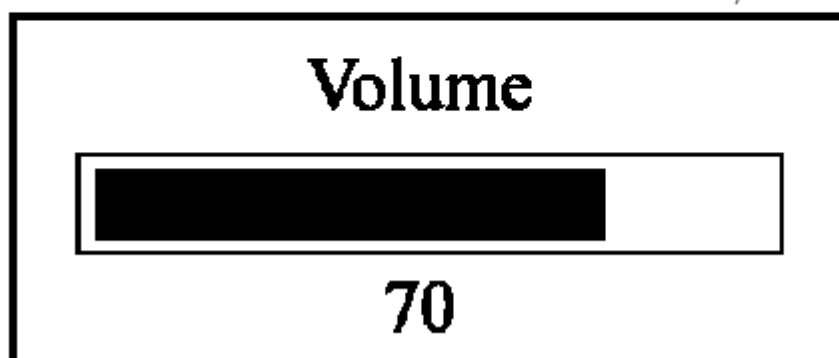

4. Input/Output Specification

4.1 Input Signal Connector

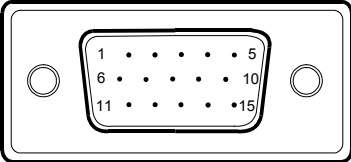Pin No.	Description	Pin No.	Description
1.	Red	9.	+5V
2.	Green	10.	Detect Cable
3.	Blue	11.	NC
4.	Ground	12.	DDC-Serial Data
5.	Ground	13.	H-Sync
6.	R-Ground	14.	V-Sync
7.	G-Ground	15.	DDC-Serial Clock
8.	B-Ground		
VGA connector layout			
			

4.2 Factory Preset Display Modes

Standard	Resolution	Horizontal Frequency	Vertical Frequency
Dos	640 × 350	31.469kHz	70.0Hz
	640×400	31.469kHz	70.0Hz
	720×400	31.469kHz	70.0Hz
VGA	640 × 480	31.470kHz	60.0Hz
	640 × 480	37.861kHz	72.0Hz
	640 × 480	37.500 kHz	75.0 Hz
SVGA	800 × 600	37.879kHz	60.0Hz
	800 × 600	48.077 kHz	72.0 Hz
	800 × 600	46.875kHz	75.0Hz
XGA	1024 × 768	48.363kHz	60.0Hz
	1024 × 768	56.476kHz	70.0Hz
	1024 × 768	60.023kHz	75.0Hz
SXGA	1280 × 1024	63.981Hz	60.0Hz
	1280 × 1024	79.976kHz	75.0Hz

4.3 Power Supply Requirement

A/C Line voltage range	100 V ~ 240 V
A/C Line frequency range	50 ± 3Hz, 60 ± 3Hz
Peak surge current	< 55A peak at 240 VAC and cold starting
Leakage current	< 3.5mA
Power line surge	No advance effects (no loss of information or defect) with a maximum of 1 half-wave missing per second
DC output Voltage	12VDC± 5 %

4.4 Panel Specification

LTM170EU-L21

4.4.1 General Features

Items	Specification	Unit
Display area	337.92(H) x 270.336(V)	mm
Driver element	a-Si TFT active matrix	
Display colors	16.2M	colors
Number of pixels	1280 x 1024	pixel
Pixel arrangement	RGB vertical stripe	
Pixel pitch	0.264(H) x 0.264(W)	mm
Display mode	Normally White	
Surface treatment	Haze 25% , Hard-coating (3H)	

4.4.2 Optical Characteristics

$T_a = 25 \pm 2^\circ\text{C}$, $V_{DD}=5\text{V}$, $f_v= 60\text{Hz}$, $f_{\text{DCLK}}=54\text{MHz}$, $I_L = 6.5\text{mA}_{\text{rms}}$

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Contrast Ratio (Center of screen)		C/R	Normal $\phi = 0$ $\theta = 0$ Viewing Angle	500	700	-	
Response Time	Rising	Tr		-	2.0	4	msec
	Falling	Tf		-	6.0	10	
Luminance of White (Center of screen)		YL		250	300	-	cd/m2
Color Chromaticity (CIE 1931)	Red	Rx		0.620	0.650	0.680	
		Ry		0.300	0.330	0.360	
	Green	Gx		0.270	0.300	0.330	
		Gy		0.570	0.600	0.630	
	Blue	Bx		0.120	0.150	0.180	
		By		0.050	0.080	0.110	
	White	Wx		0.283	0.313	0.343	
		Wy		0.299	0.329	0.359	
Color Chromaticity (CIE 1976)	Red	Ru'		-	0.459	-	
		Rv'		-	0.525	-	
	Green	Gu'		-	0.125	-	
		Gv'		-	0.563	-	
	Blue	Bu'		-	0.164	-	
		Bv'		-	0.197	-	

	White	Wu'		-	0.198	-	
		Wv'		-	0.468	-	
Viewing Angle	Hor.	θ L	CR $\geq$ 10	65	75	-	Degrees
		θ R		65	75	-	
	Ver.	ϕ H		65	75	-	
		ϕ L		50	60	-	
Brightness Uniformity (9 Points)		Buni		-	-	25	%

4.4.3 Electrical Characteristics

TFT LCD MODULE


Item		Symbol	Min.	Typ.	Max.	Unit
Voltage of Power Supply		V _{DD}	4.5	5.0	5.5	V
Interface type		LVDS	DS90C383/385 DS90C386 Pair			
Current of Power Supply	(a) Black	I _{DD}	-	600	-	mA
	(b) White		-	500	-	mA
	(c) Dot		-	700	850	mA
Vsync Frequency		f _V	55	60	77	Hz
Hsync Frequency		f _H	56.7	64	82.082	kHz
Main Frequency		f _{DCLK}	40	54	69.28	MHz
Rush Current		I _{RUSH}	-	-	3.0	A

BACKLIGHT UNIT

Item		Symbol	Min.	Typ.	Max.	Unit
Lamp Current		I _L	3.0	6.5	7.0	mArms
Lamp Voltage		V _L	-	650	-	Vrms
Lamp Frequency		f _L	40	-	60	kHz
Operating Life Time		Hr	50,000	-	-	Hour
inverter waveform	asymmetry rate	W _{asy}	-	-	10	%
	distortion rate	W _{dis}	-	-	±10	%
Startup Voltage		V _s	-	-	0~1,800	Vrms
					25~1,500	

5. Block Diagram

5.1 Software Flowing Chart

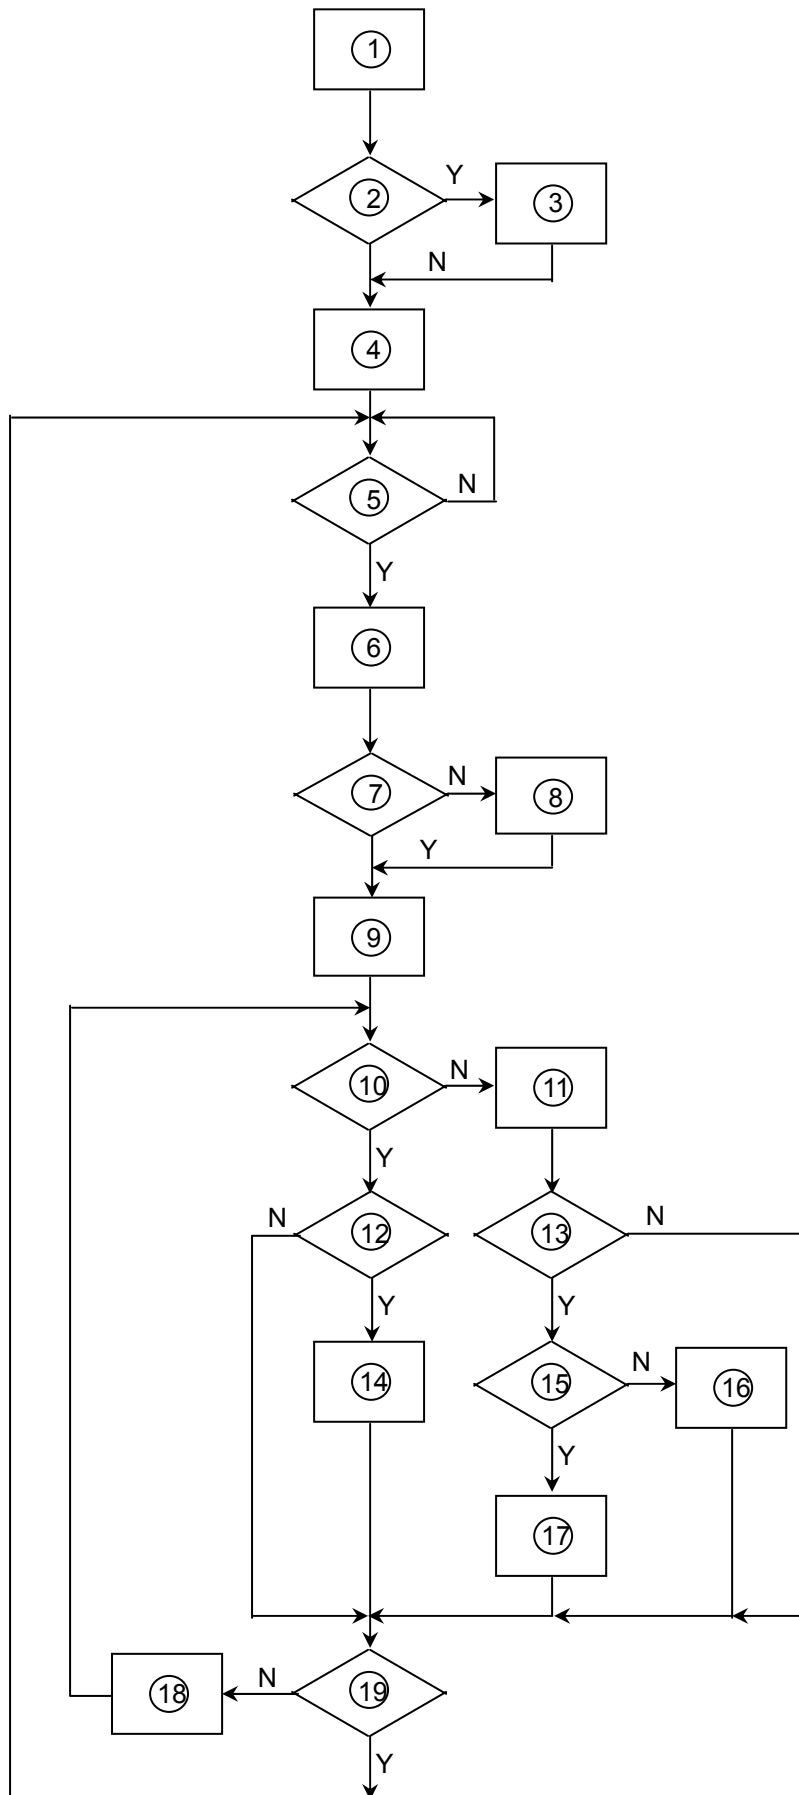


REMARK:


1) MCU initializes.
2) Is the EPROM blank?
3) Program the EPROM by default values.
4) Get the PWM value of brightness from EPROM.
5) Is the power key pressed?
6) Clear all global flags.
7) Are the AUTO and SELECT keys pressed?
8) Enter factory mode.
9) Save the power key status into EPROM. Turn on the LED and set it to green color. Scalar initializes.
10) In standby mode?
11) Update the lifetime of back light.
12) Check the analog port, are they're any signals coming?
13) Does the scalar send out an interrupt request?
14) Wake up the scalar.
15) Are there any signals coming from analog port?
16) Display "No connection Check Signal Cable" message. And go into standby mode after the message disappears.
17) Program the scalar to be able to show the coming mode.
18) Process the OSD display.
19) Read the keyboard. Is the power key pressed?

5.2 Electrical Block Diagram

5.2.1 Main Board

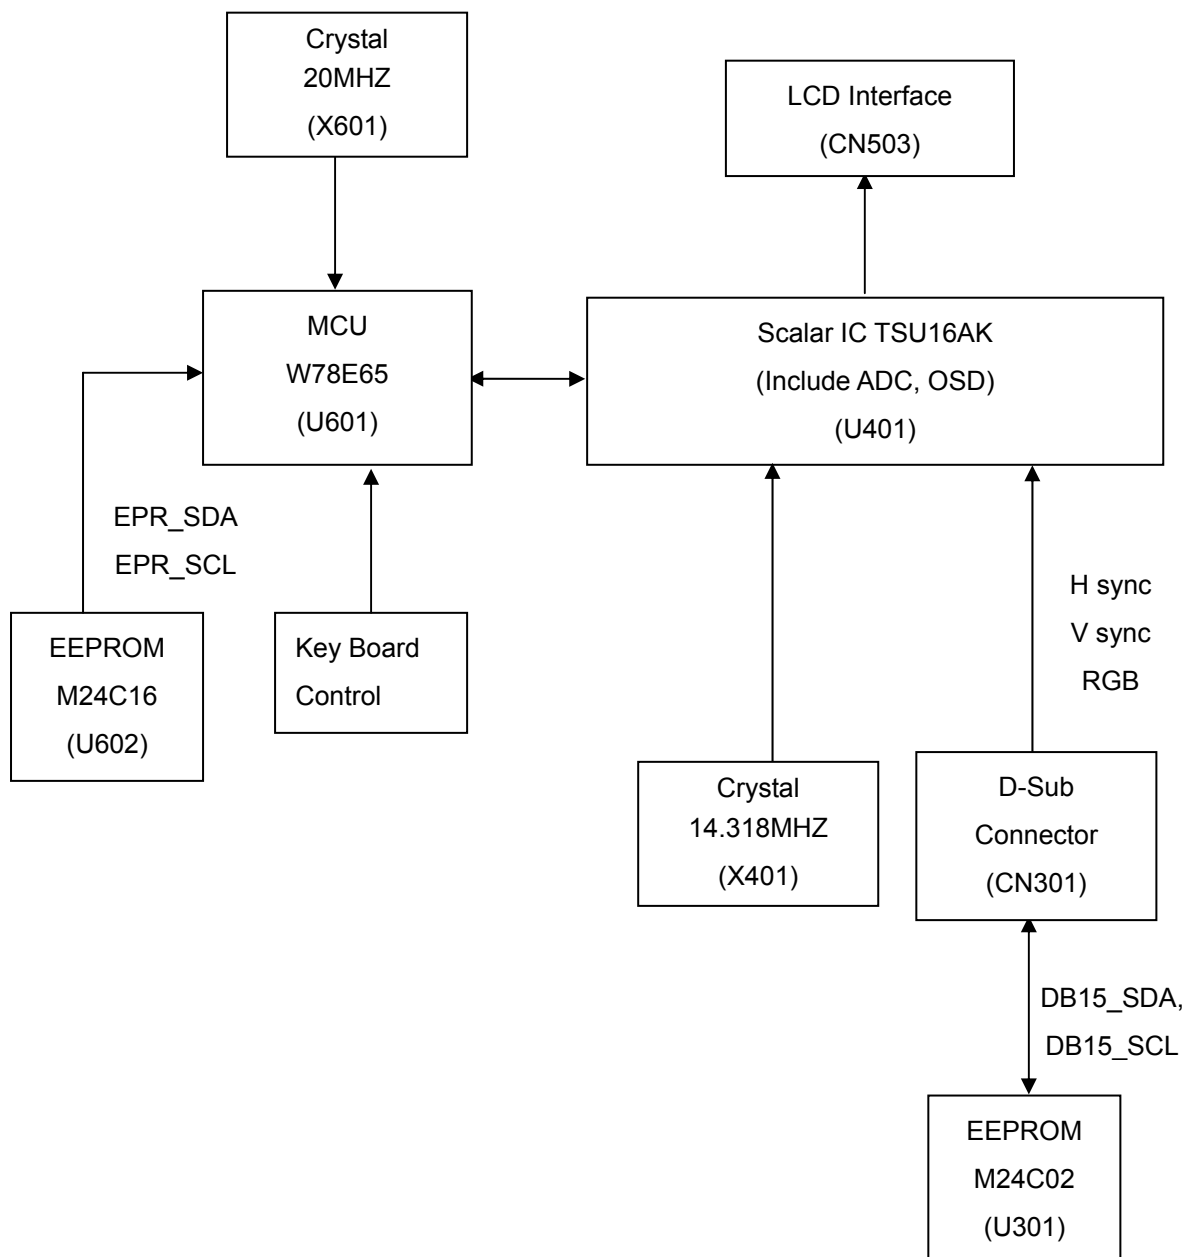


5.2.2 Power Board

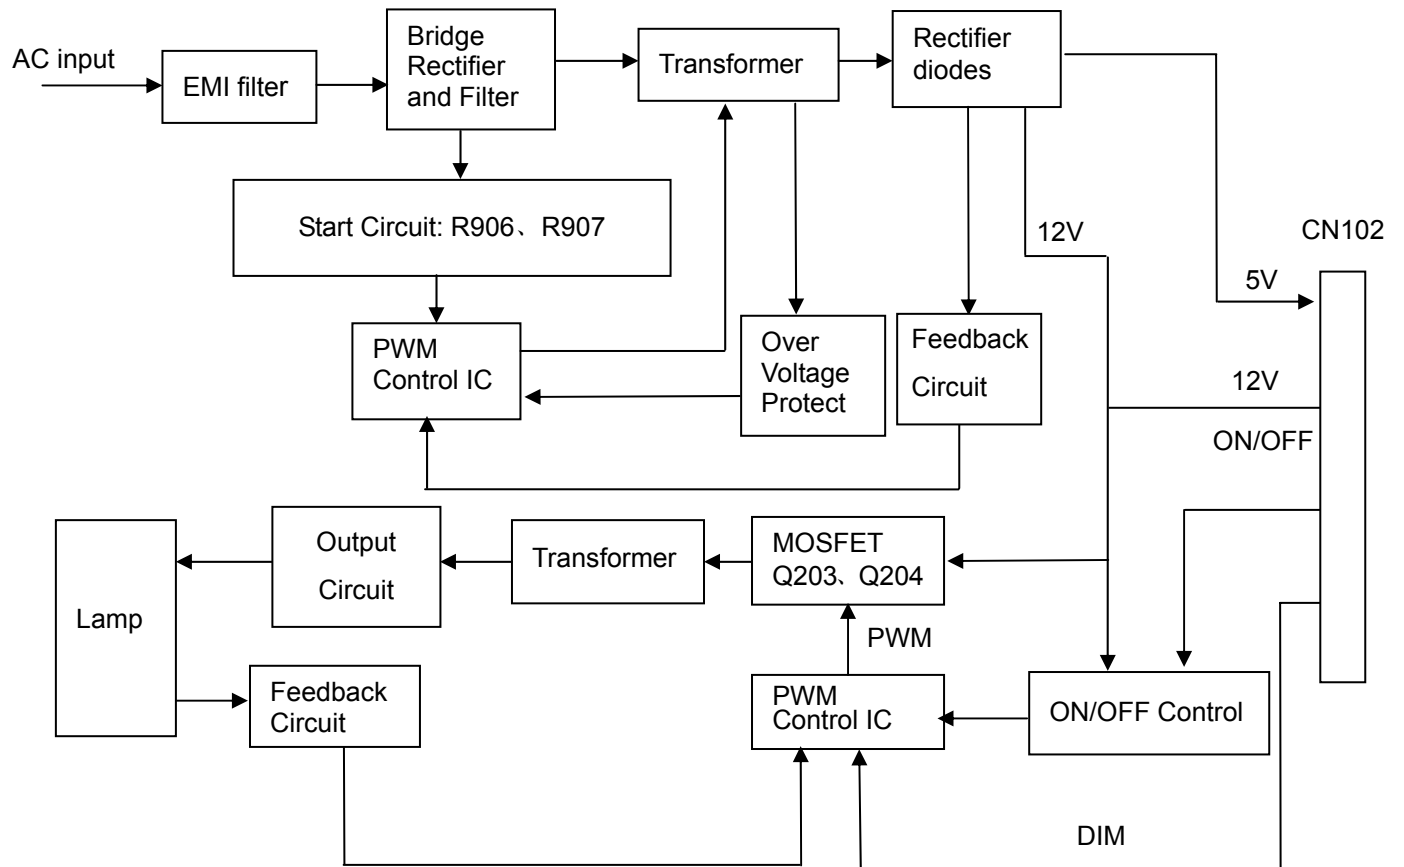


6. Schematic

6.1 Main Board




715G1237-2-3




TSU16AK SCHEMATIC

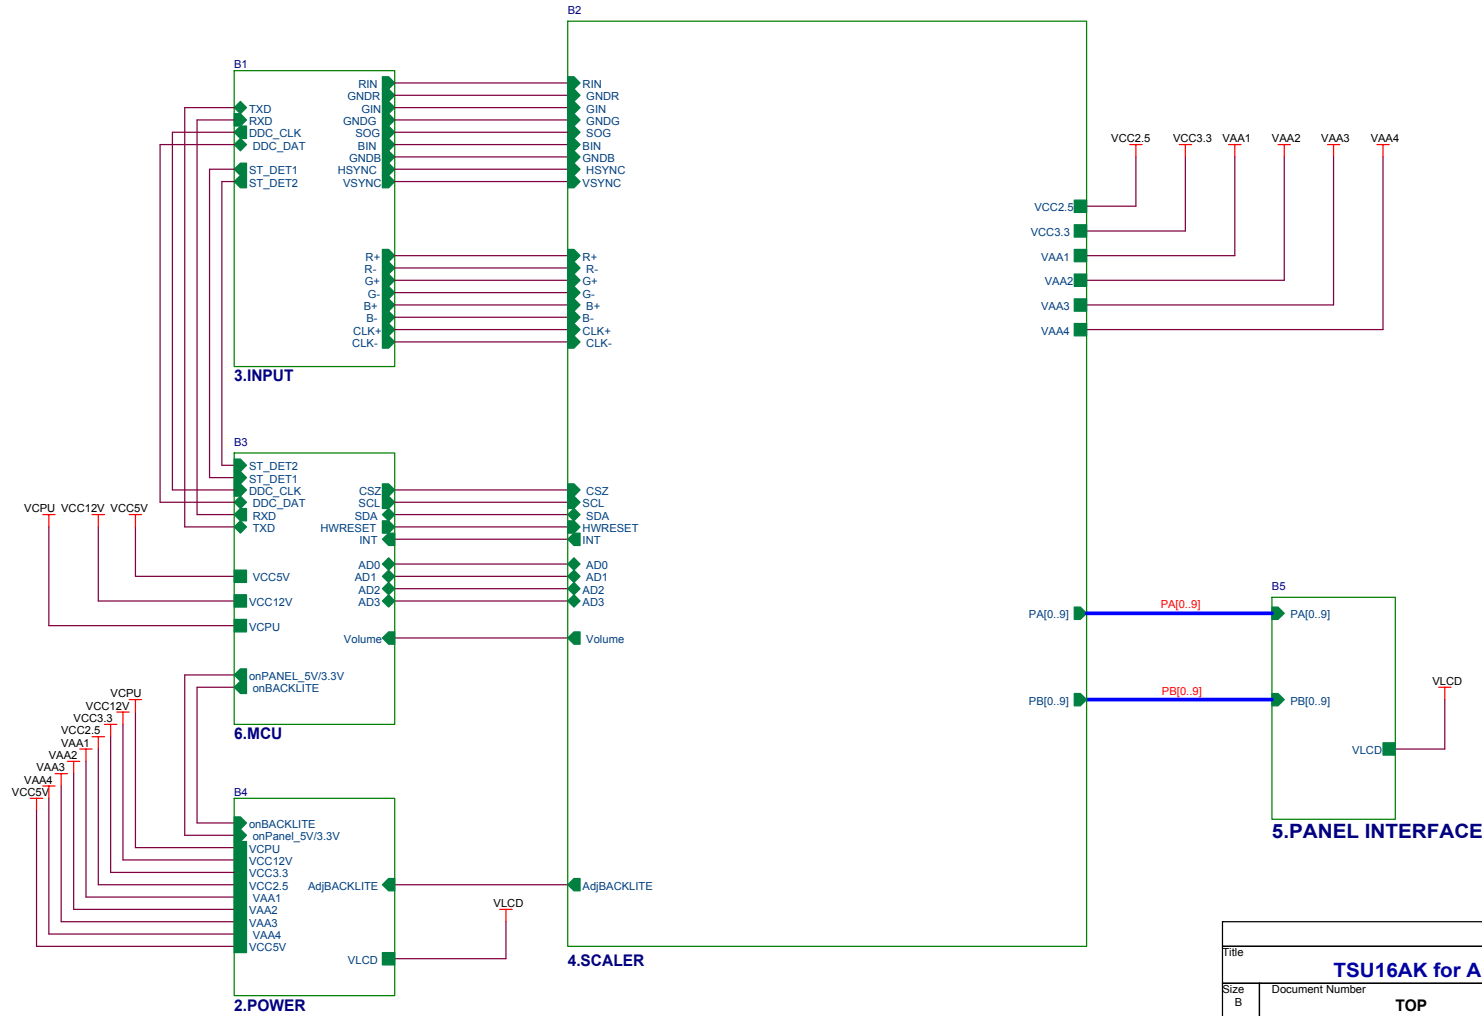


Title			
TSU16AK for AOC			
Size	Document Number	TOP	Rev
B			D
Date:	Wednesday, April 14, 2004	Sheet	1 of 6

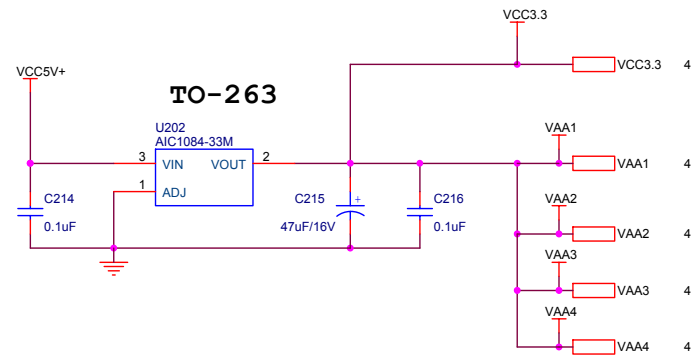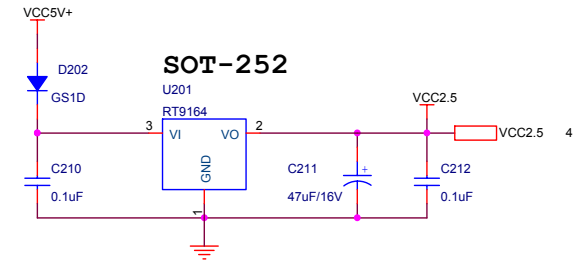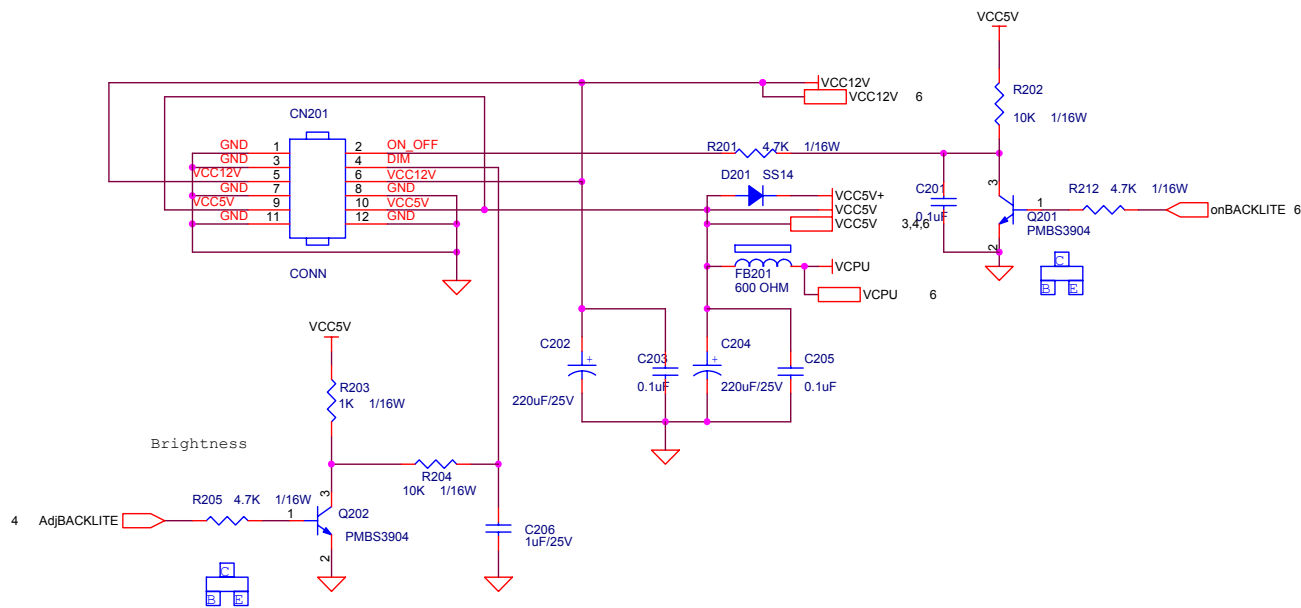


NEW
Circuit


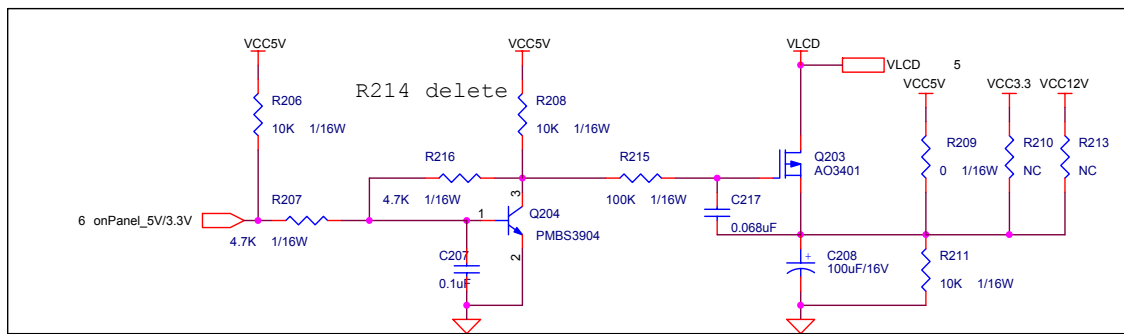


Title				
TSU16AK for AOC				
Size B	Document Number			Rev
	POWER			D
Date:	Friday, November 26, 2004	Sheet	2 of 6	

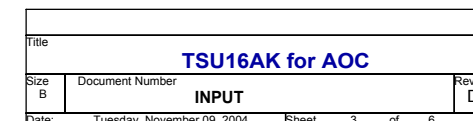


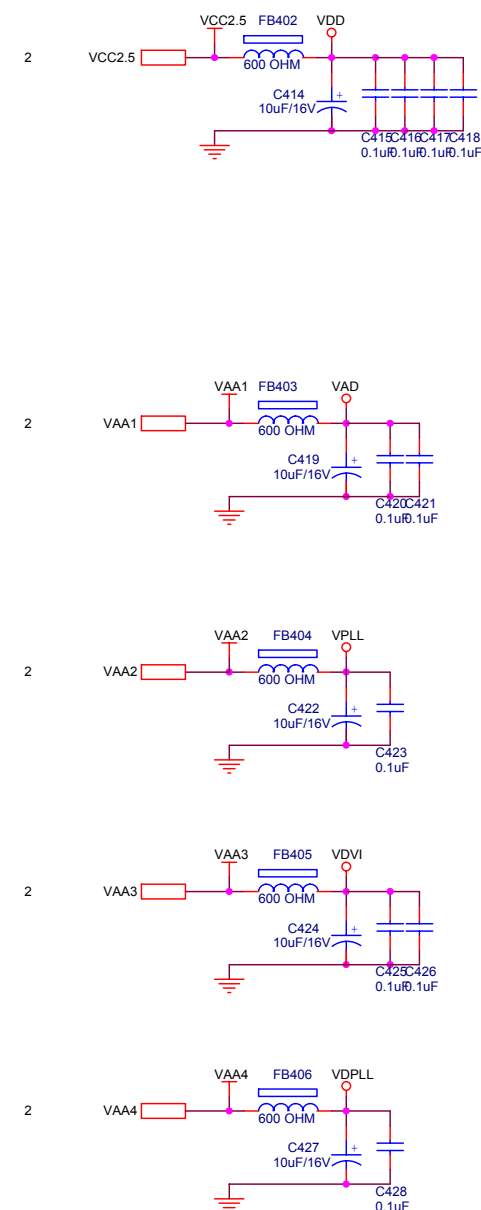

Title				
TSU16AK for AOC				
Size B	Document Number			Rev D
SCALER				
Date:	Wednesday, April 14, 2004		Sheet	4 of 6

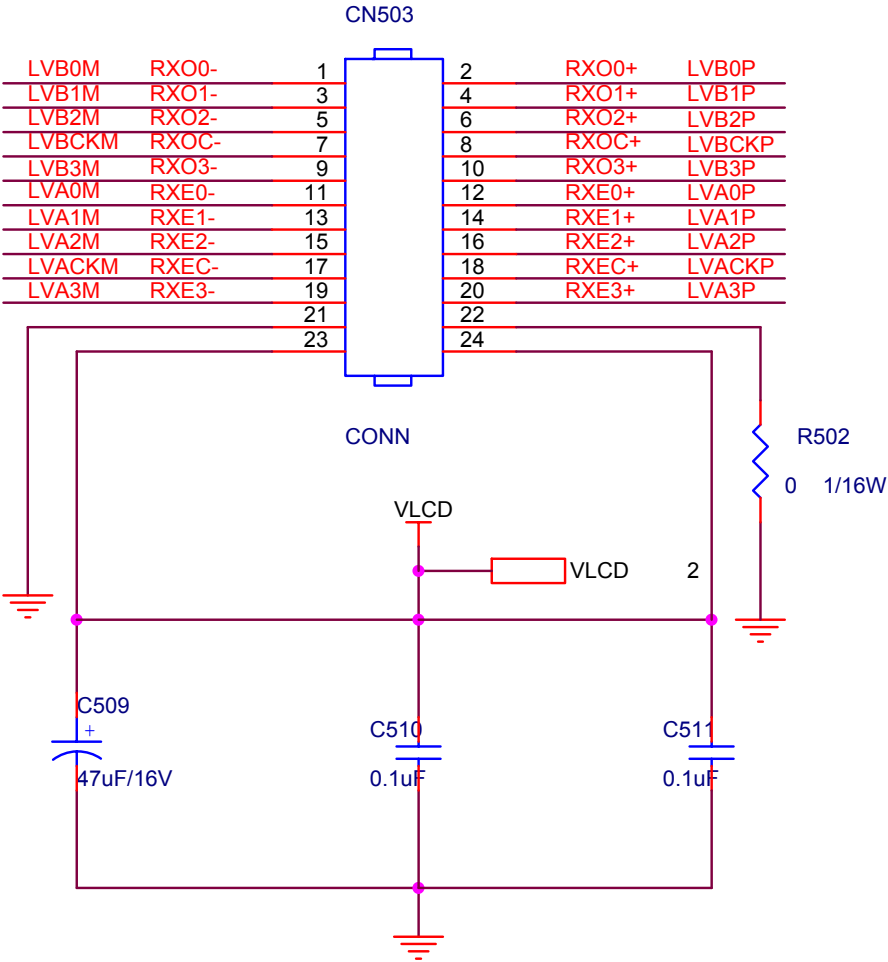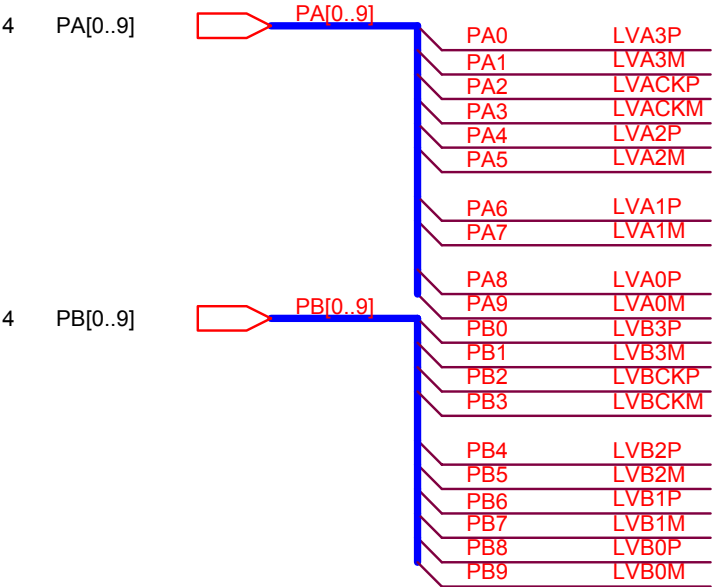


Title		
TSU16AK for AOC		
Size A	Document Number	Rev D
PANEL INTERFACE		
Date:	Wednesday, April 14, 2004	Sheet 5 of 6

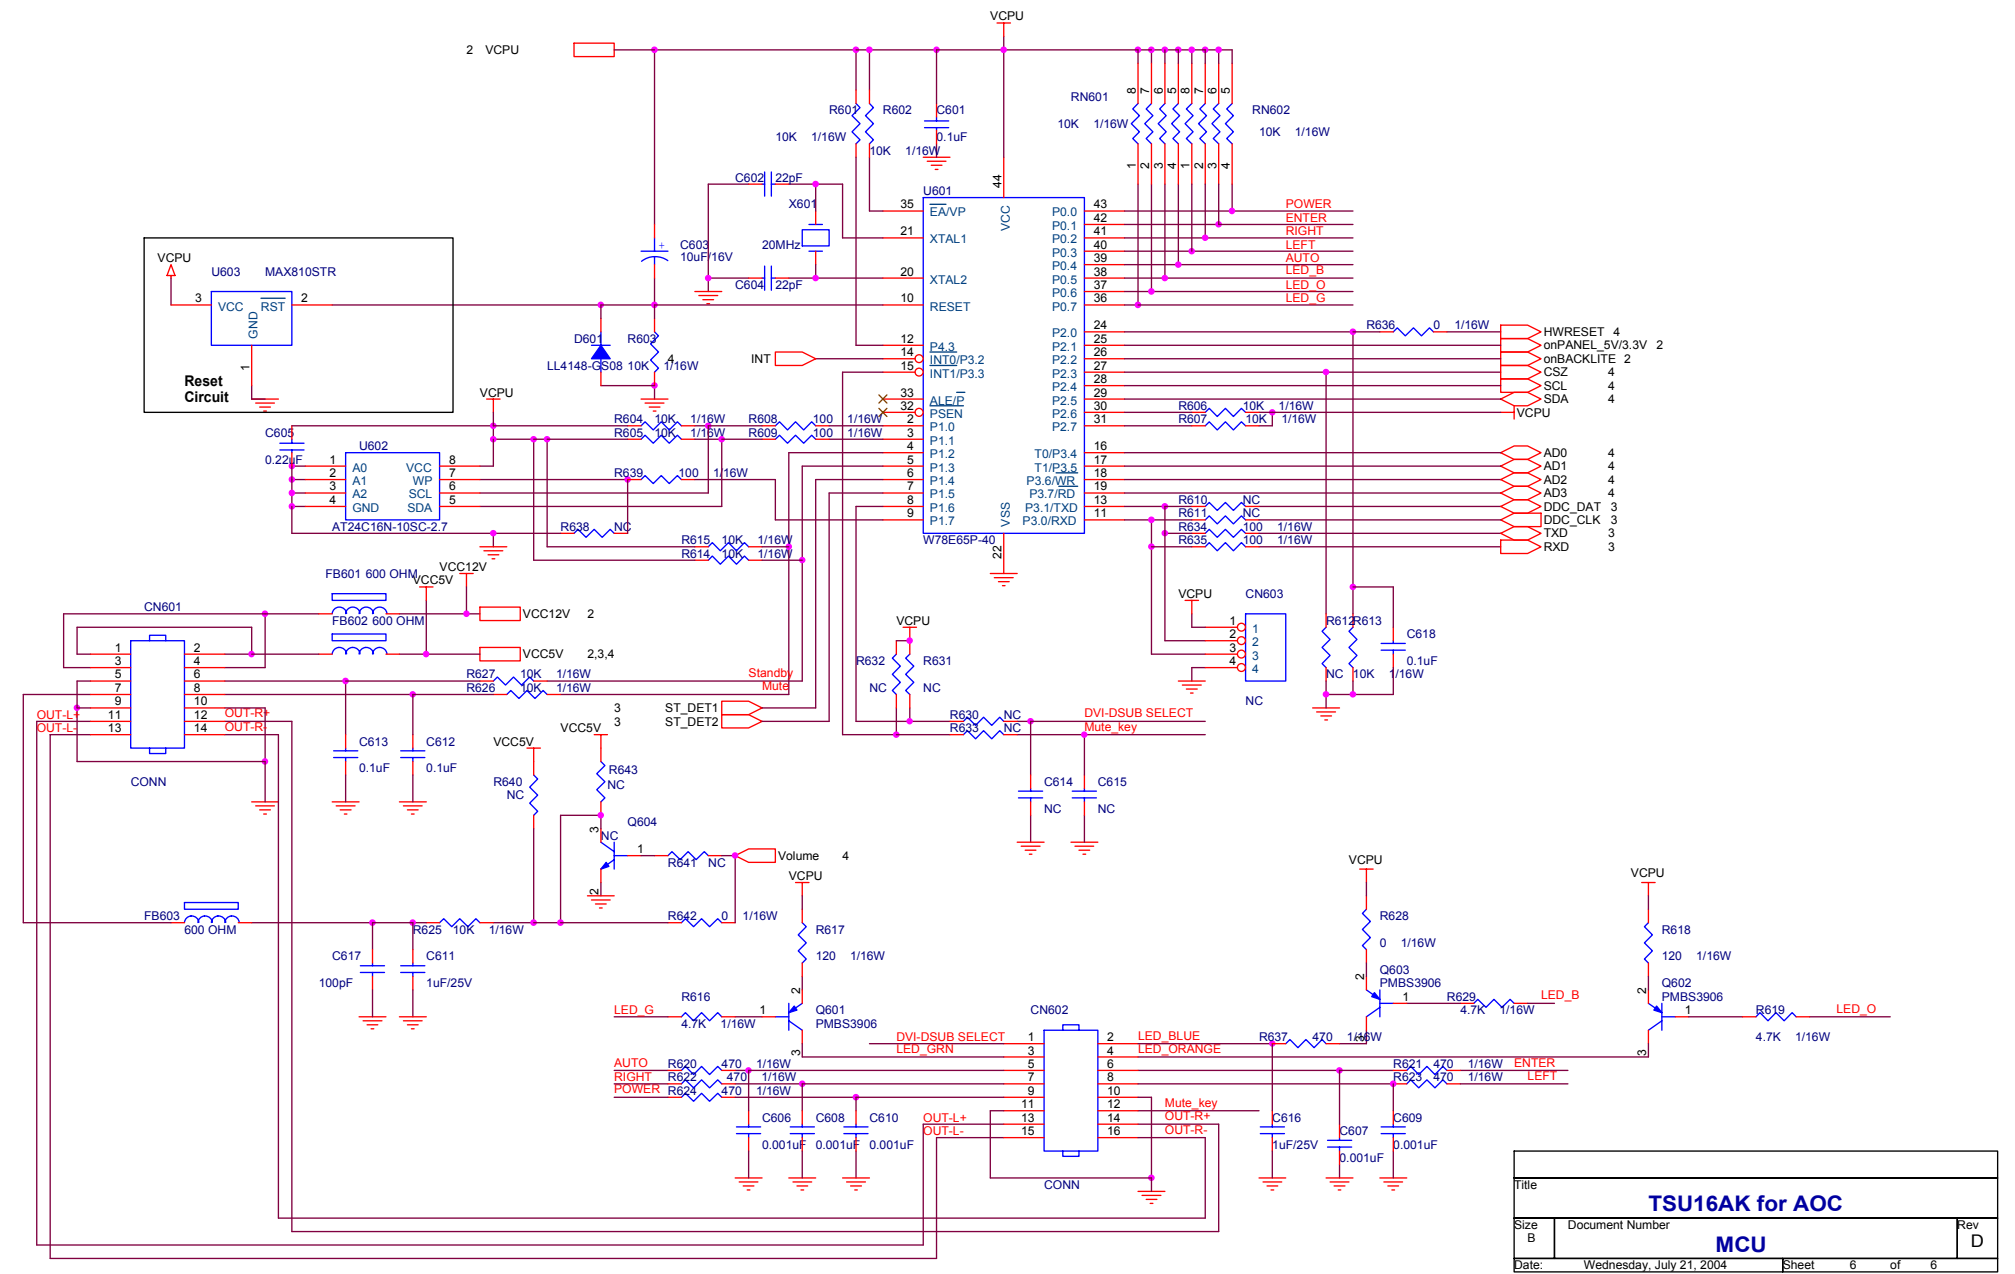


Title		
TSU16AK for AOC		
Size	Document Number	Rev
B	MCU	D
Date:	Wednesday, July 21, 2004	Sheet 6 of 6

6.2 Power Board

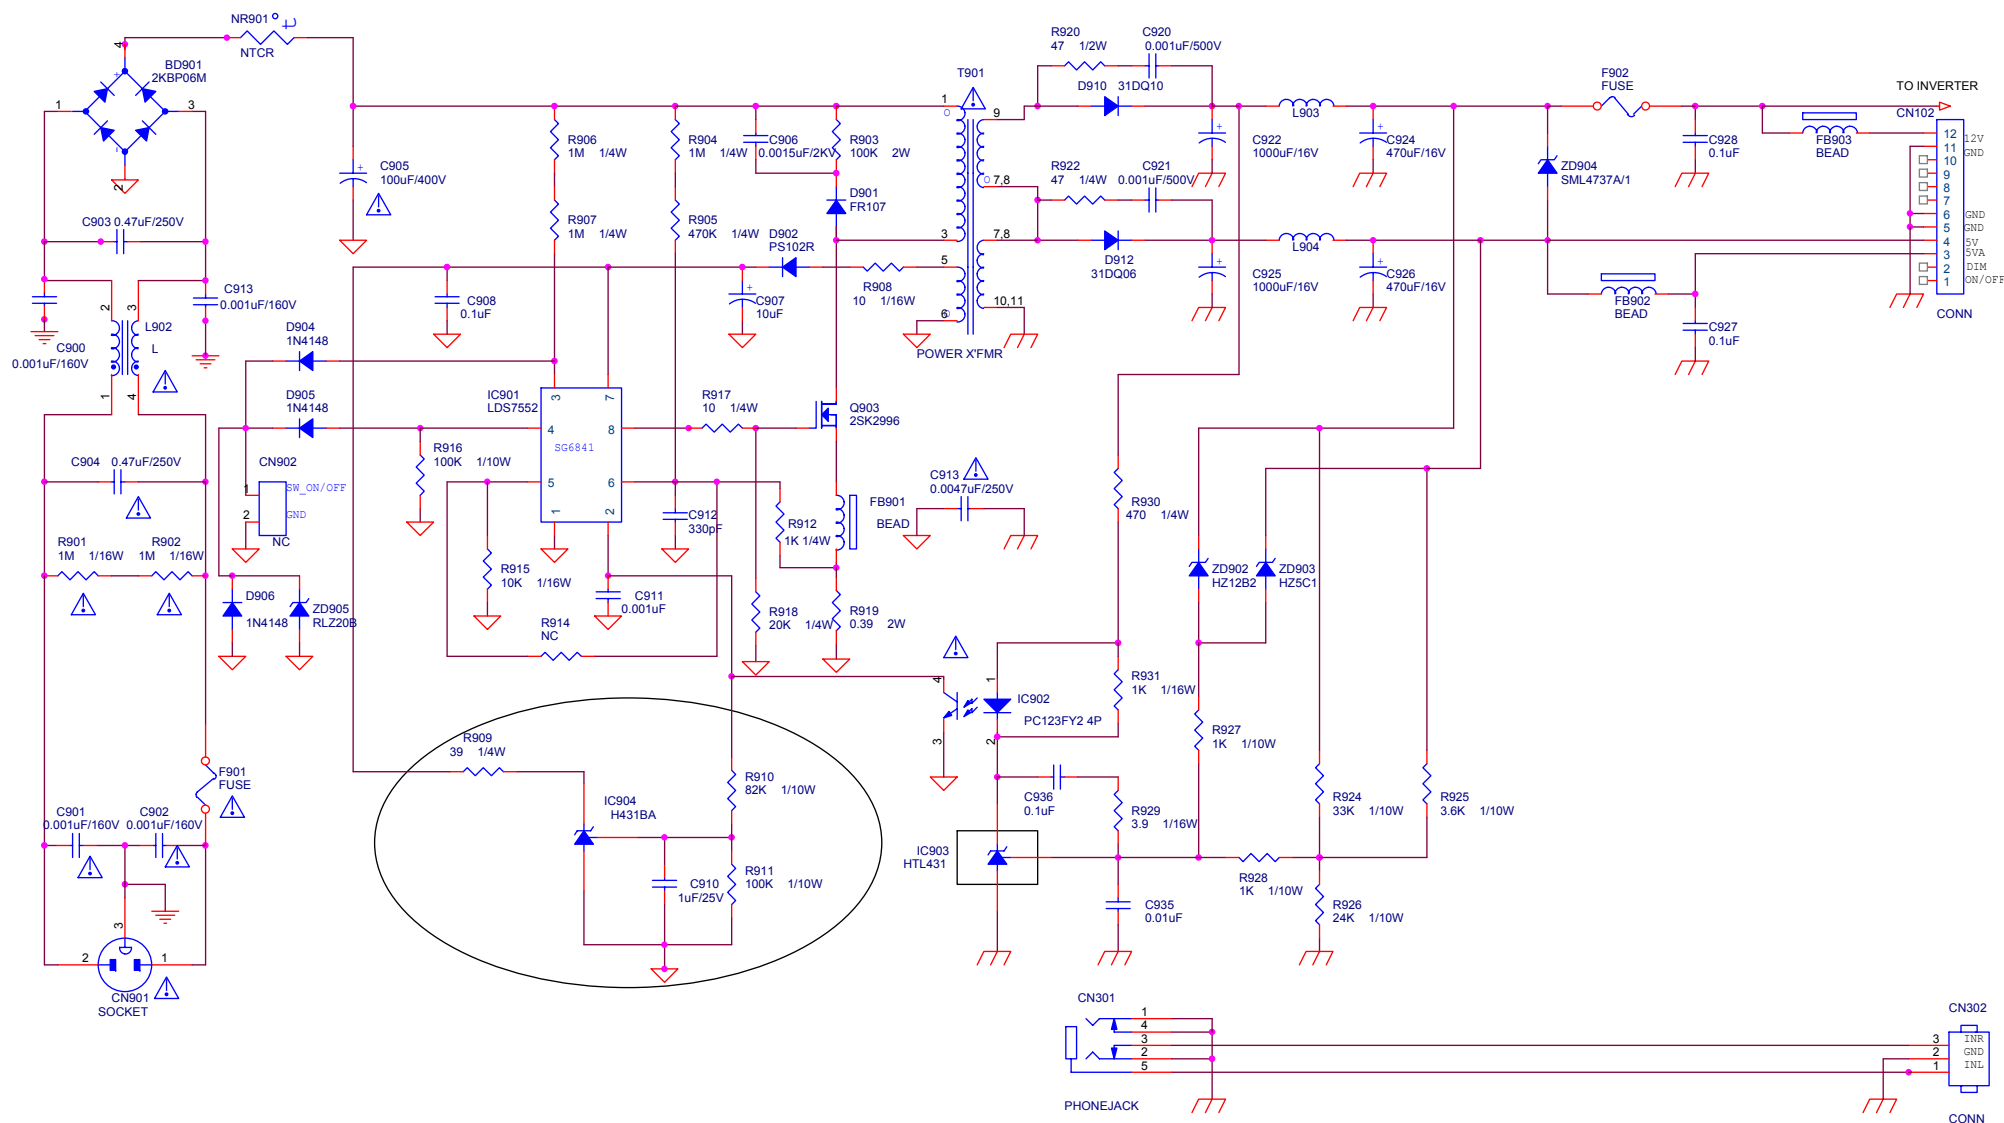



<Title>		
POWER		
Size B	Document Number	Rev 1
Date: Monday, July 04, 2005	Sheet 1 of 3	

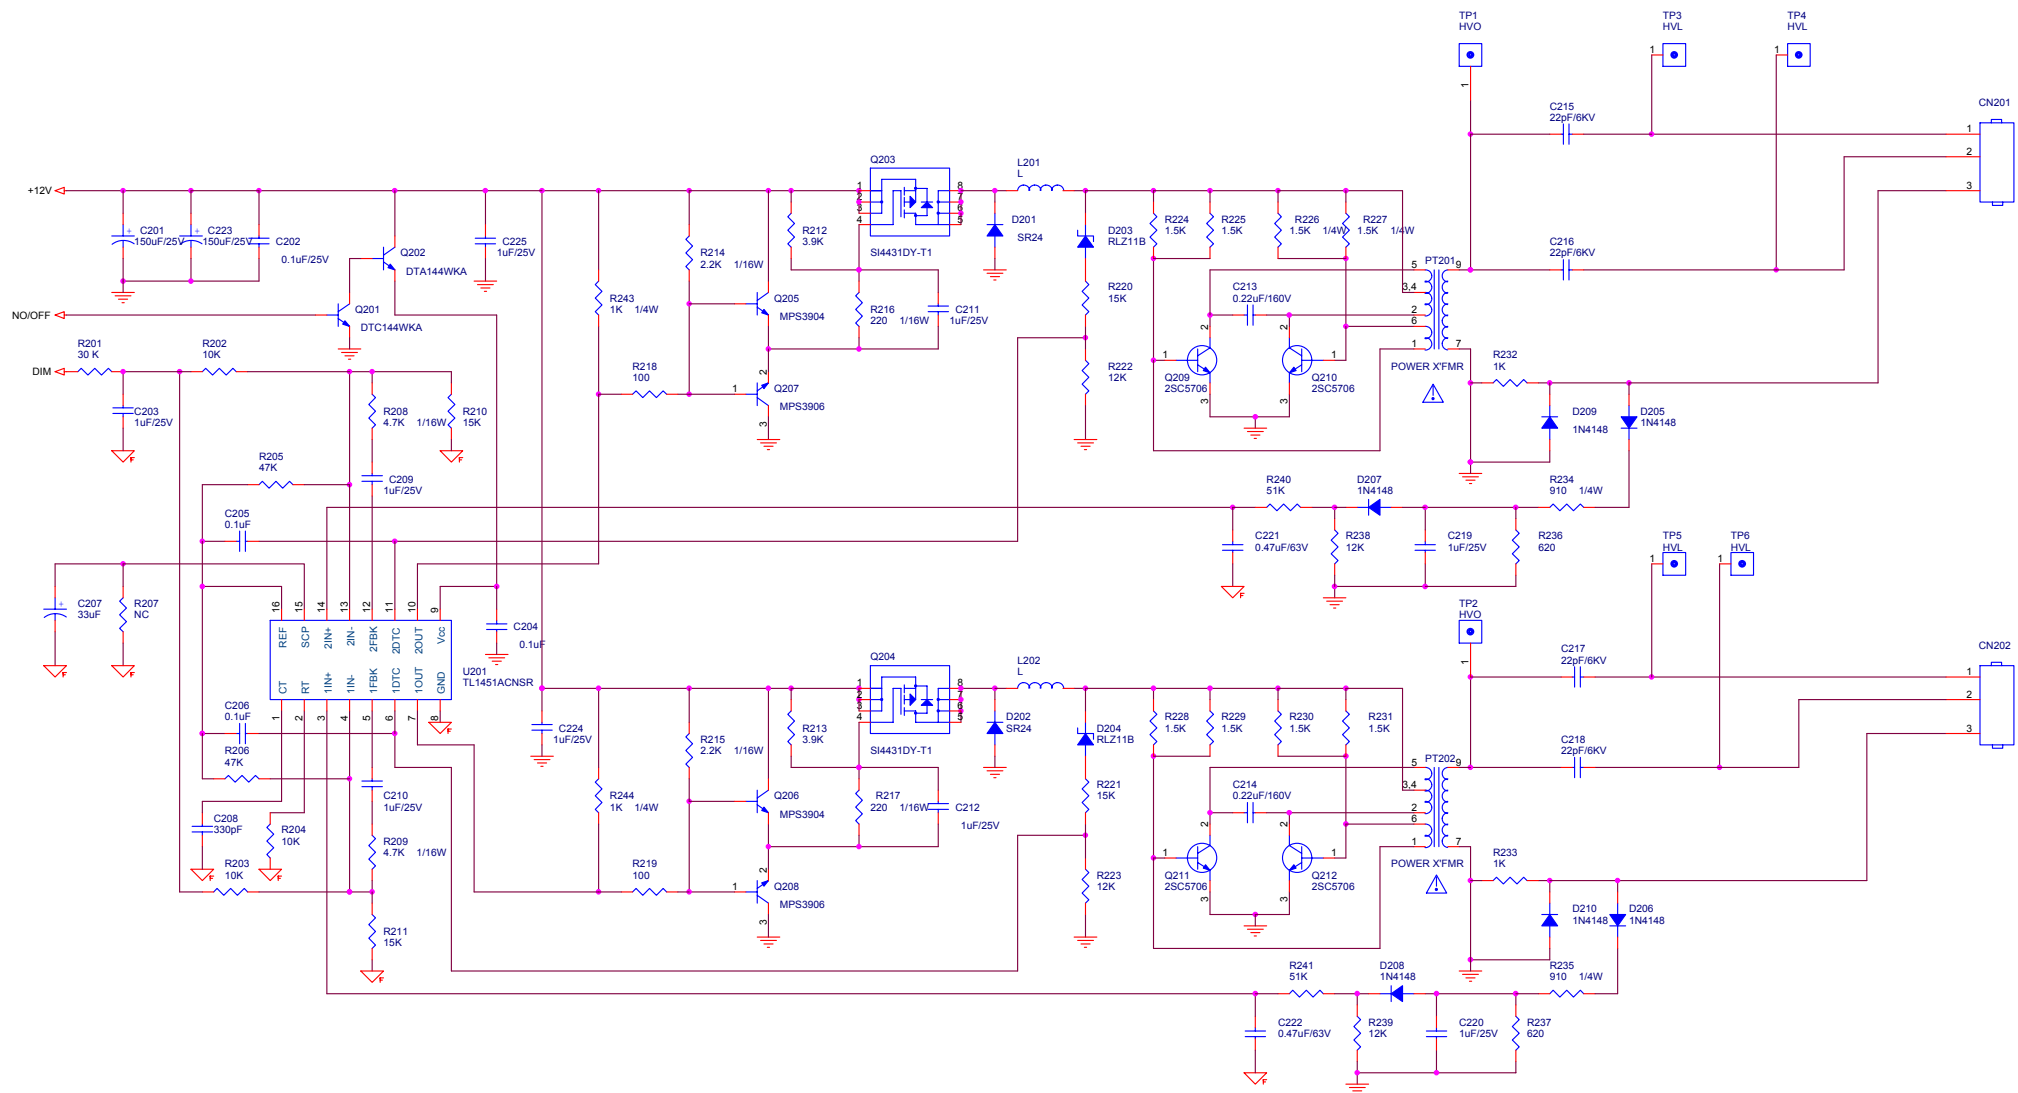



6.3 Audio Board

715G1144-1-IO

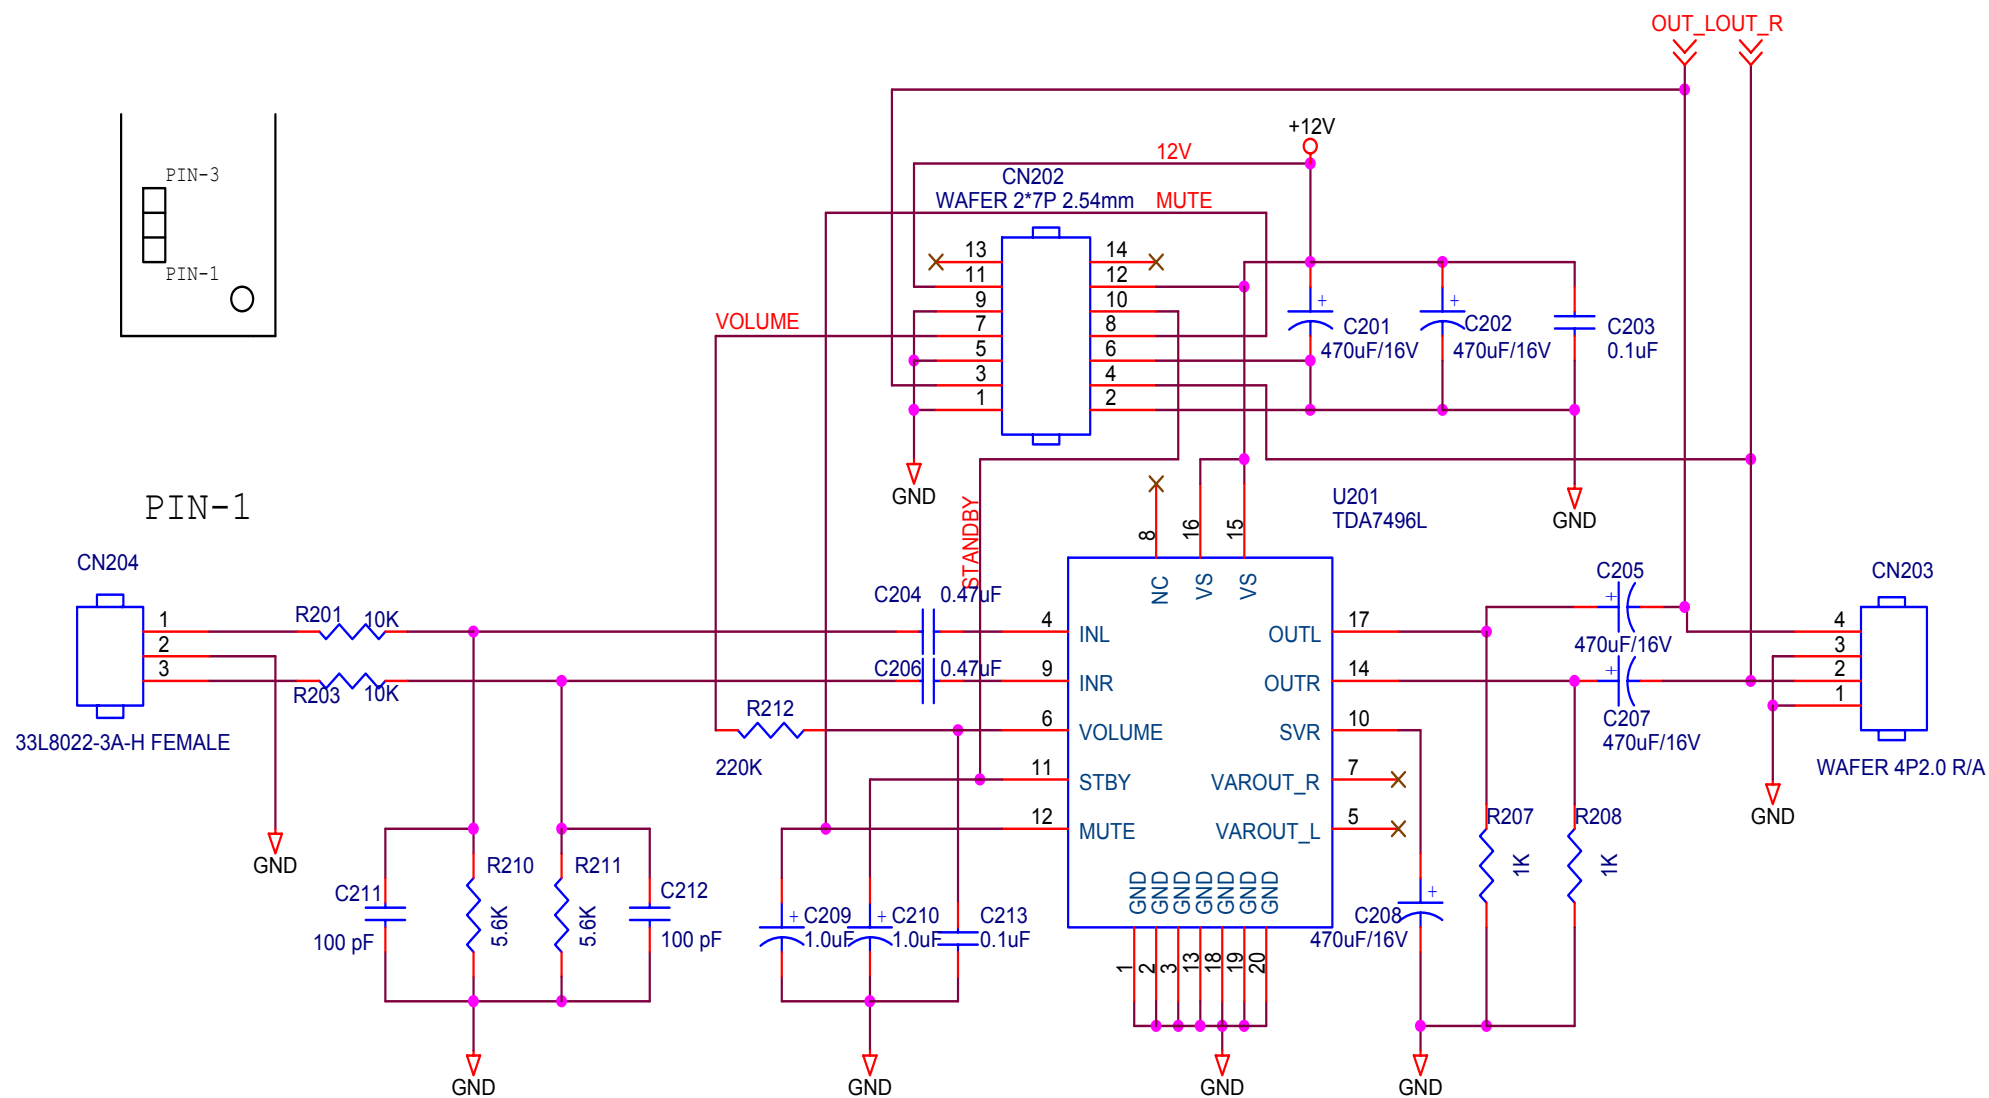


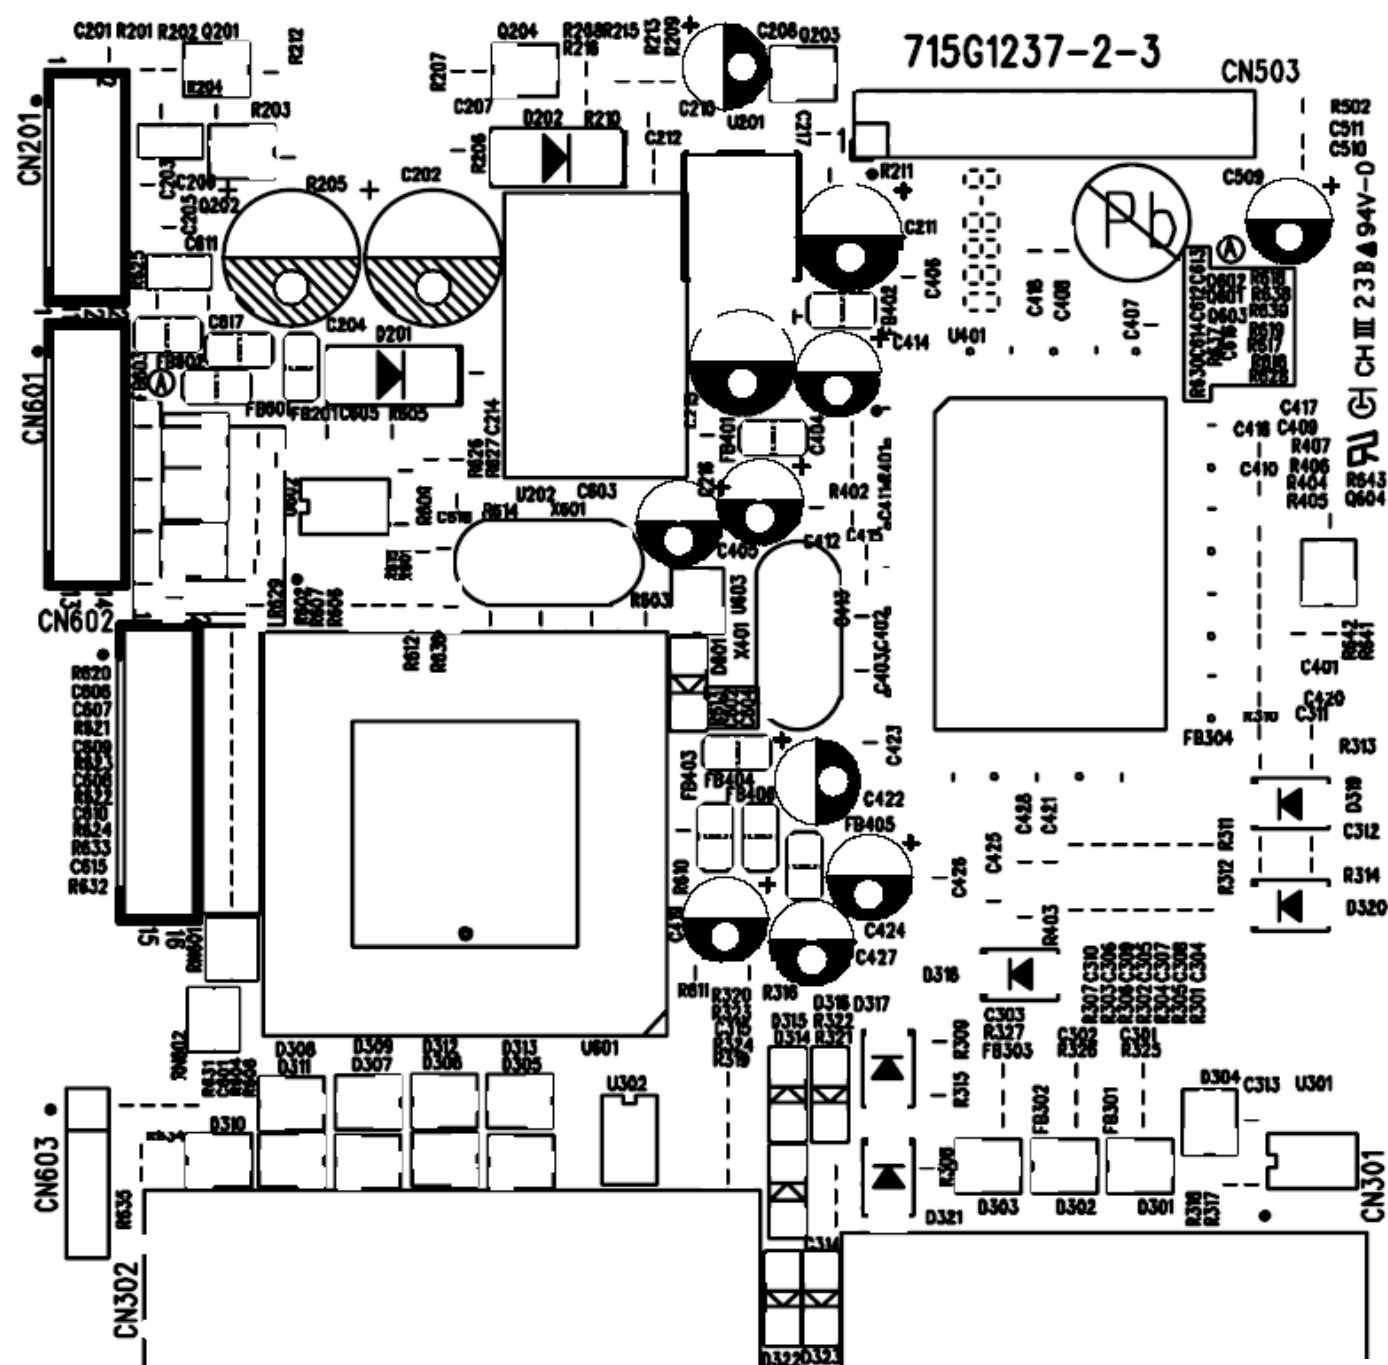


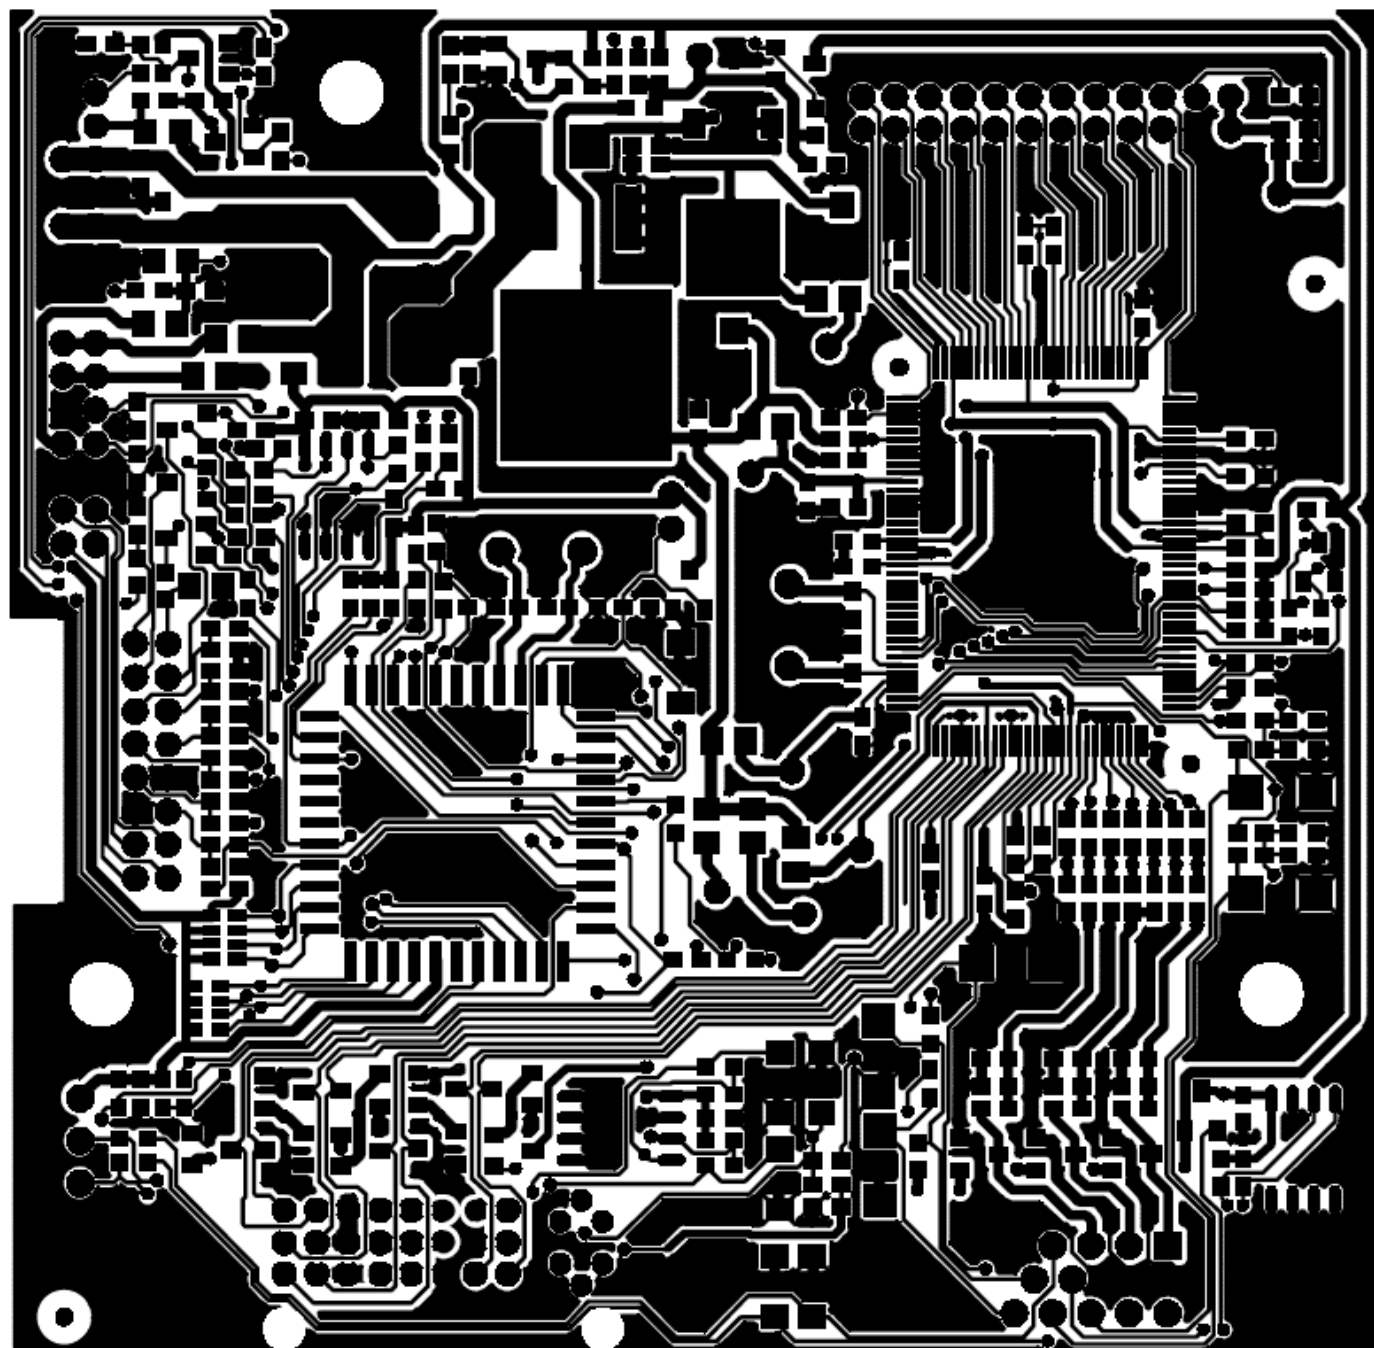


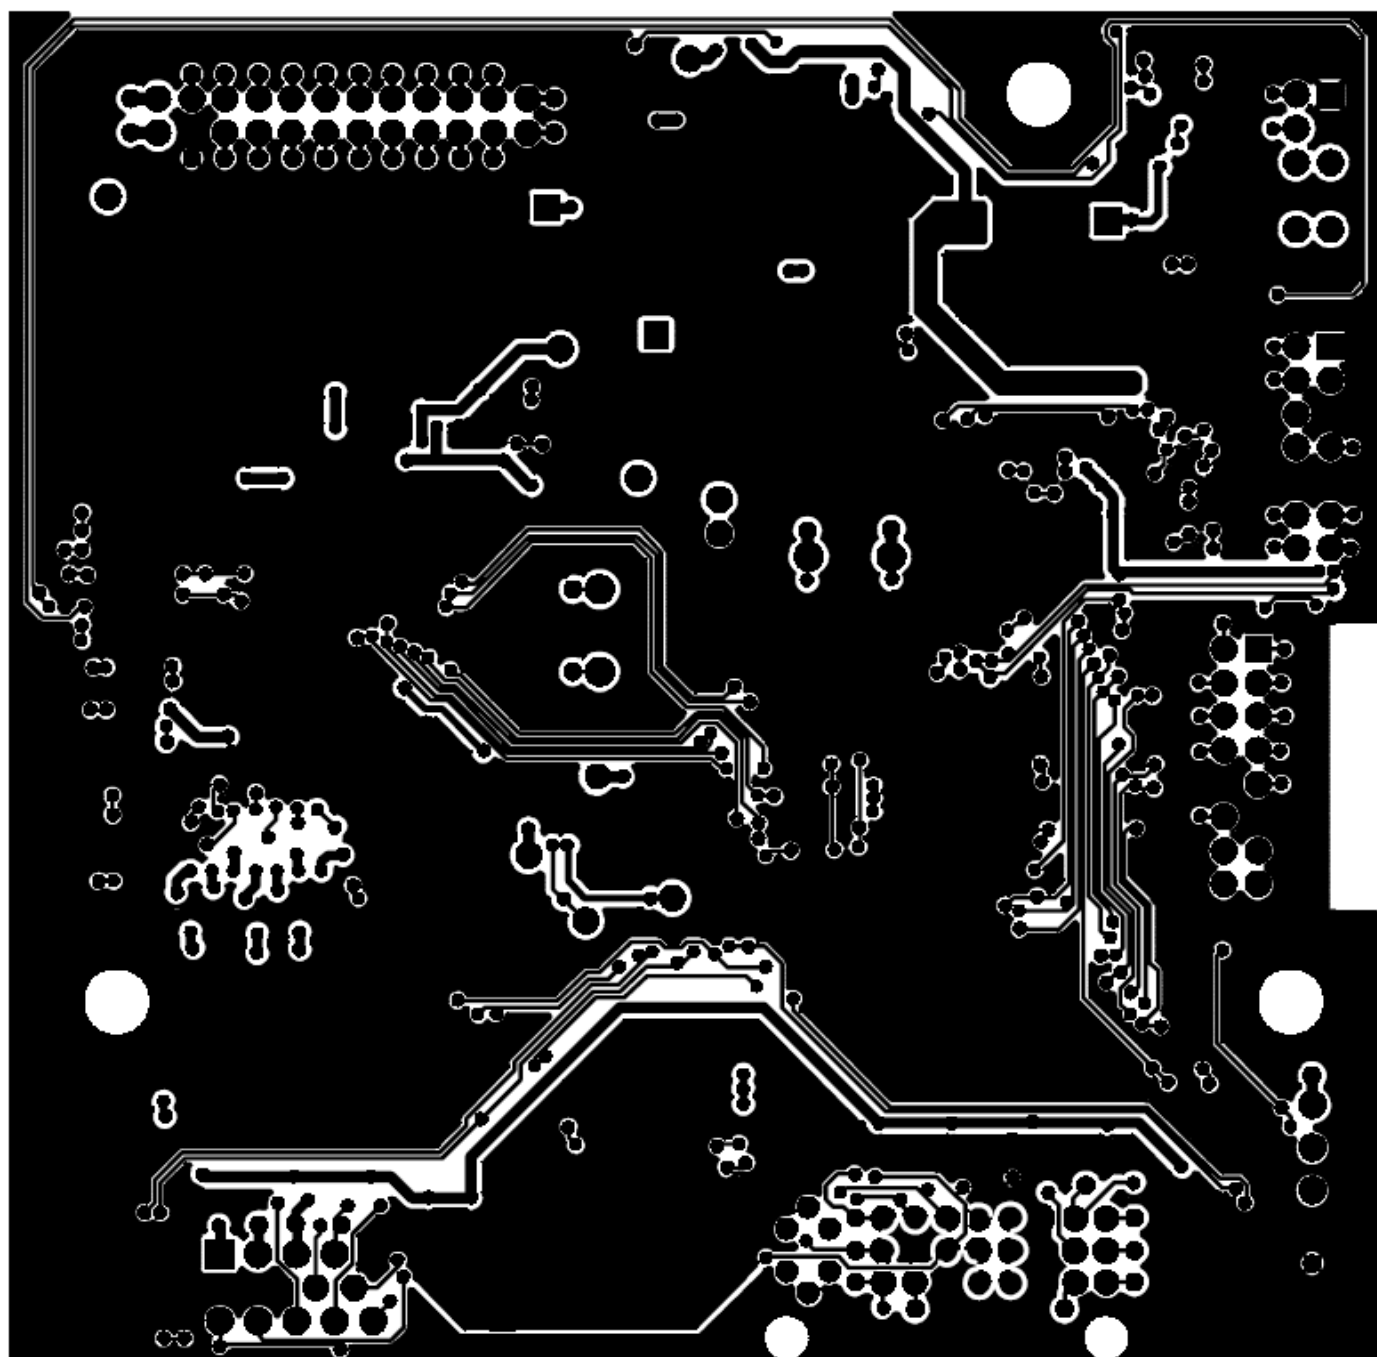




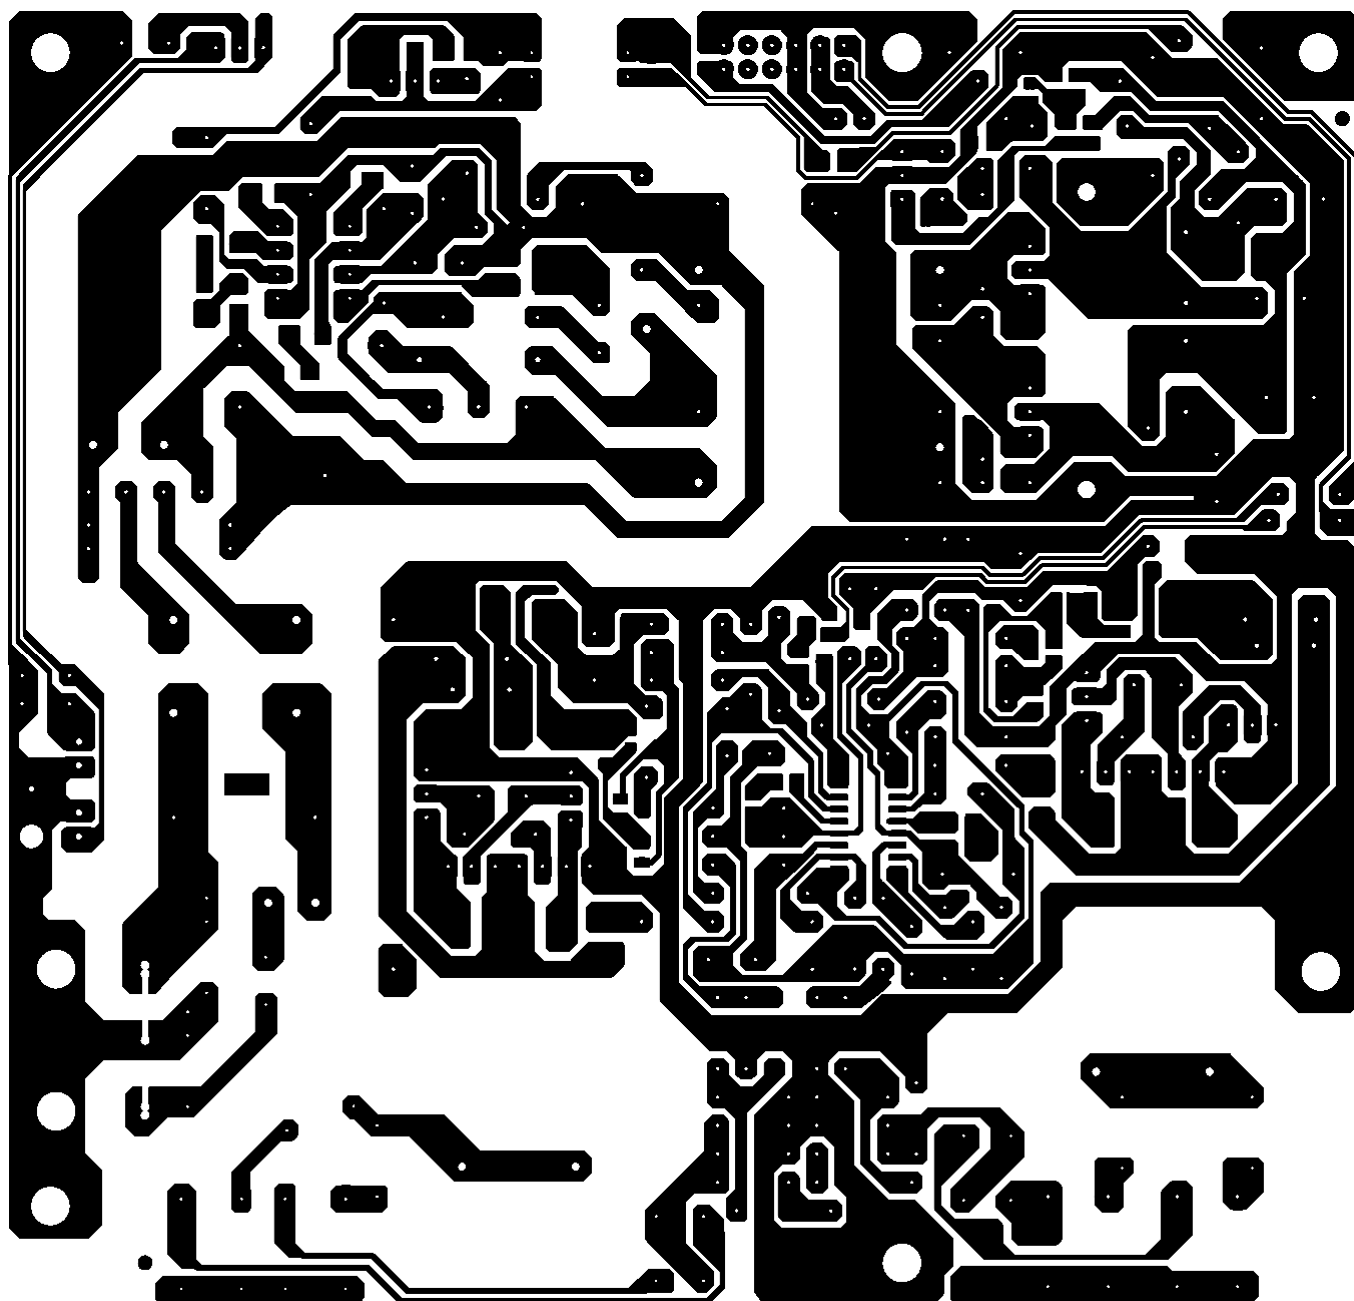

7.3 Key Board

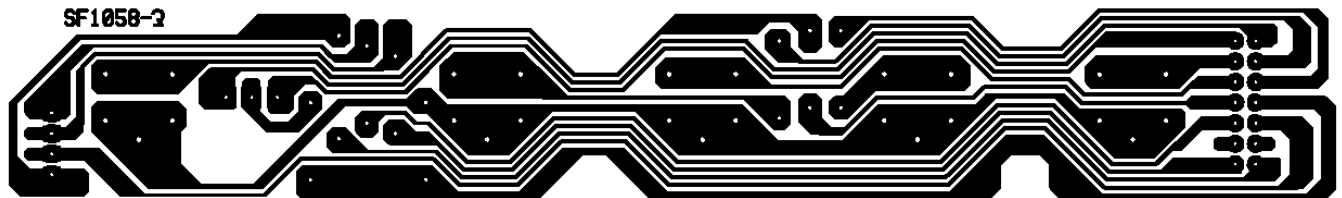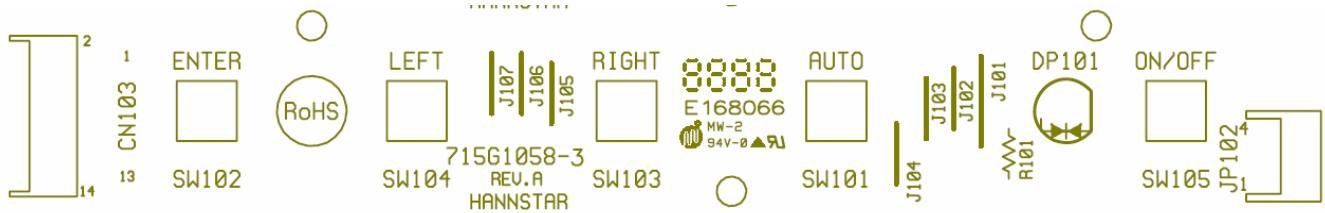

7.4 Audio Board

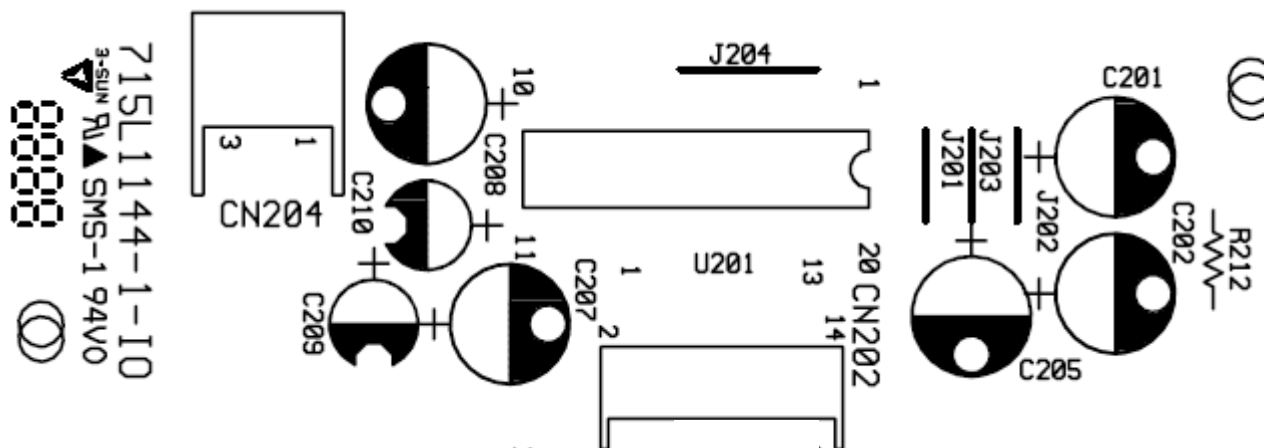

8. Maintainability


8.1 Equipments and Tools Requirement

Voltmeter; Oscilloscope; Pattern Generator; DDC Tool with an IBM Compatible Computer; Alignment Tool; LCD Color Analyzer; Service Manual; User Manual.


8.2 Trouble Shooting

8.2.1 Main Board


No power

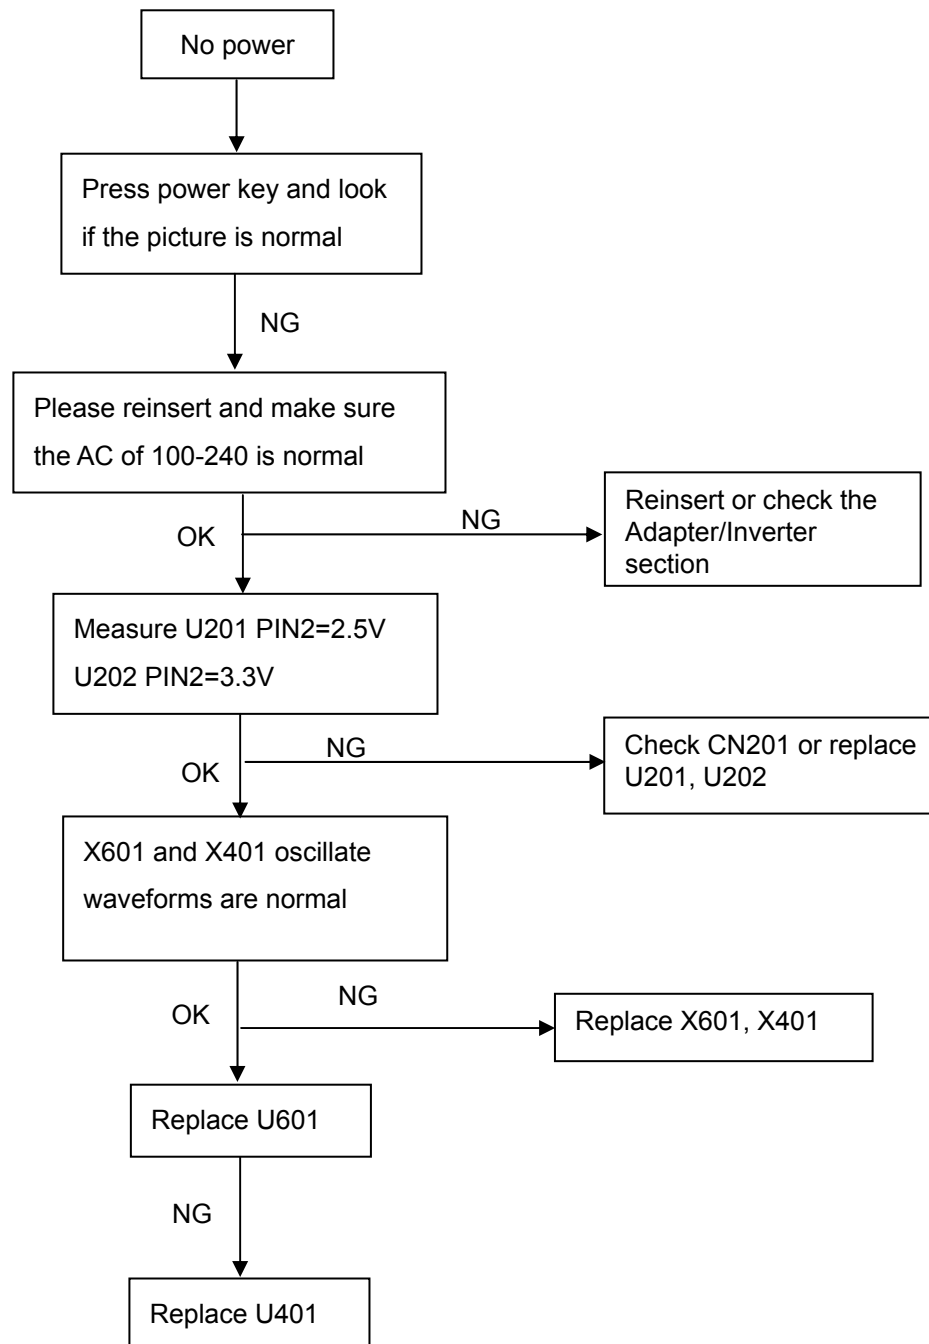



No picture (LED orange)

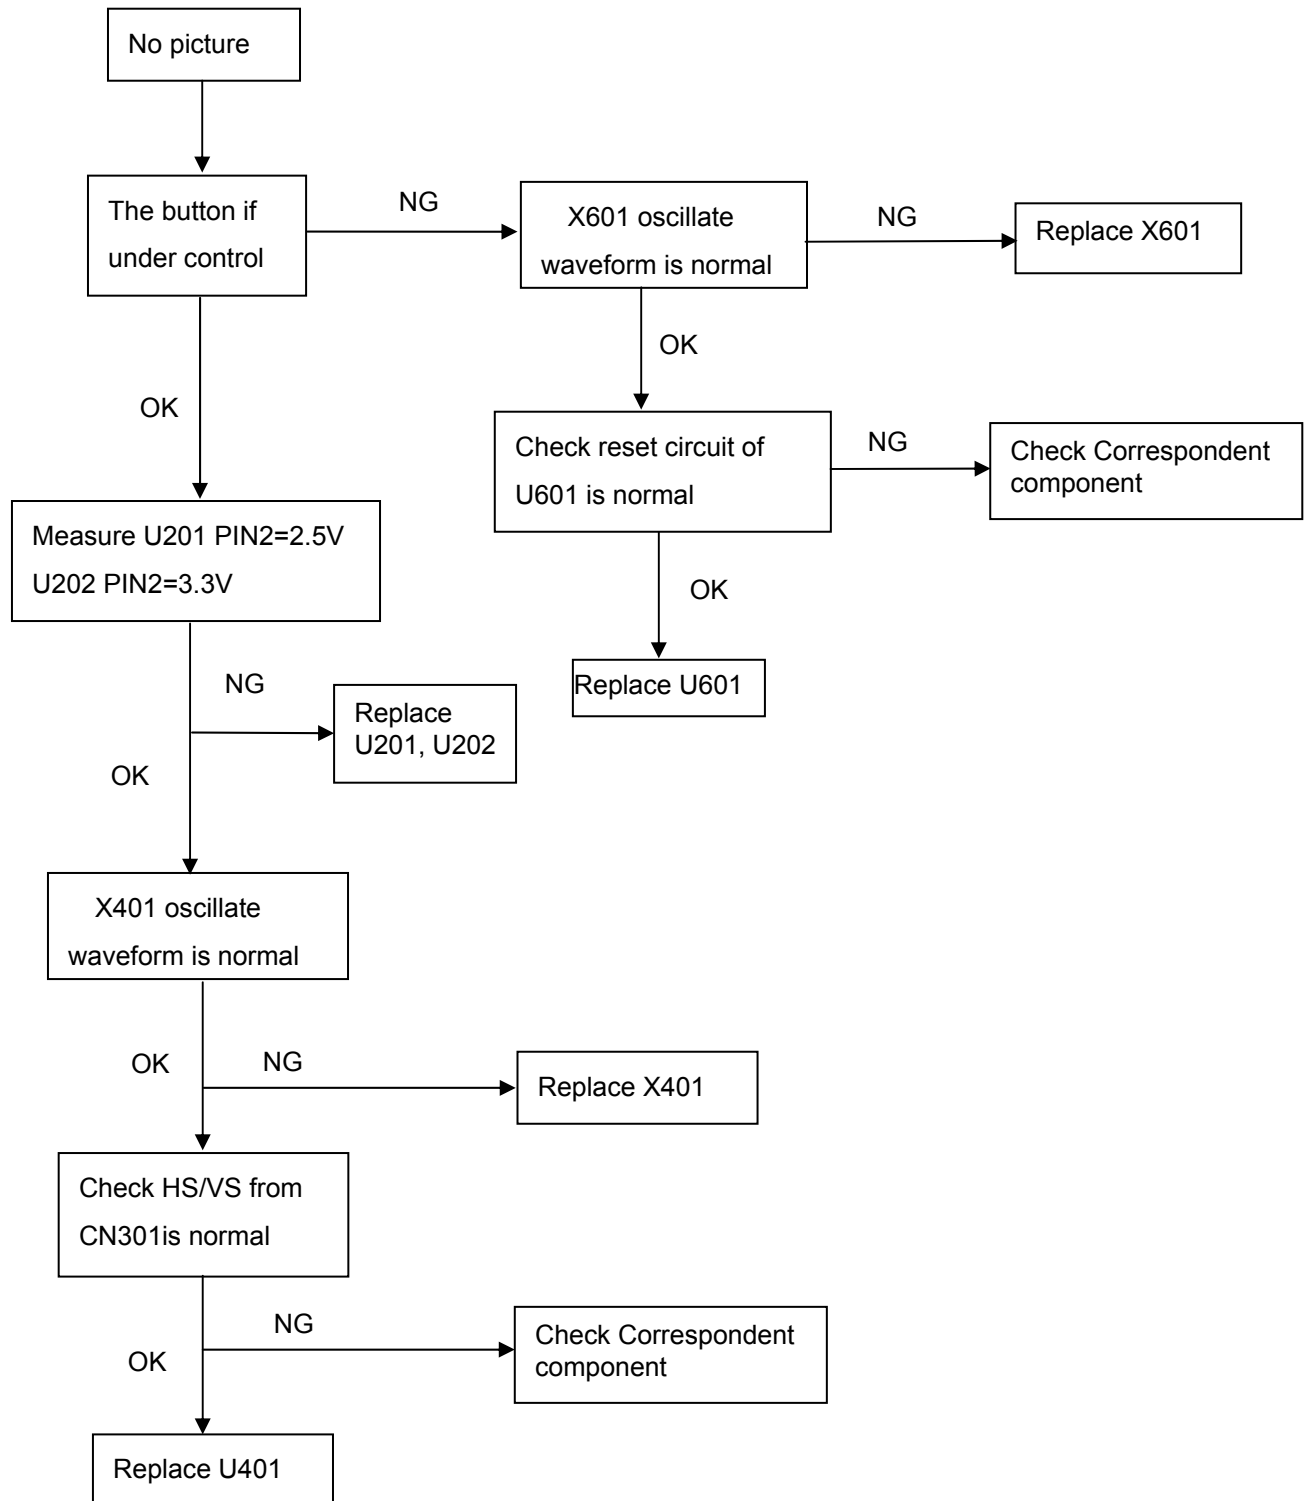


White screen

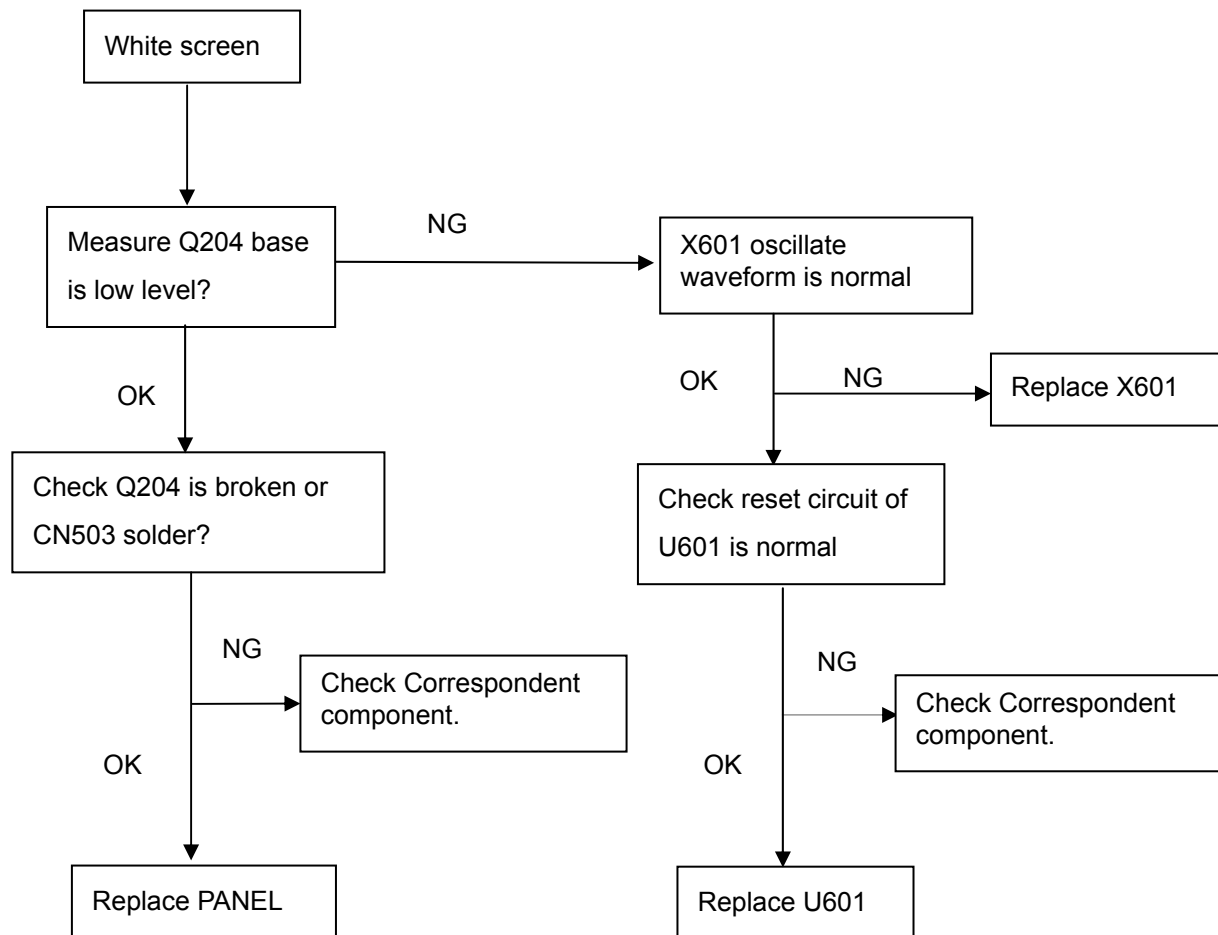

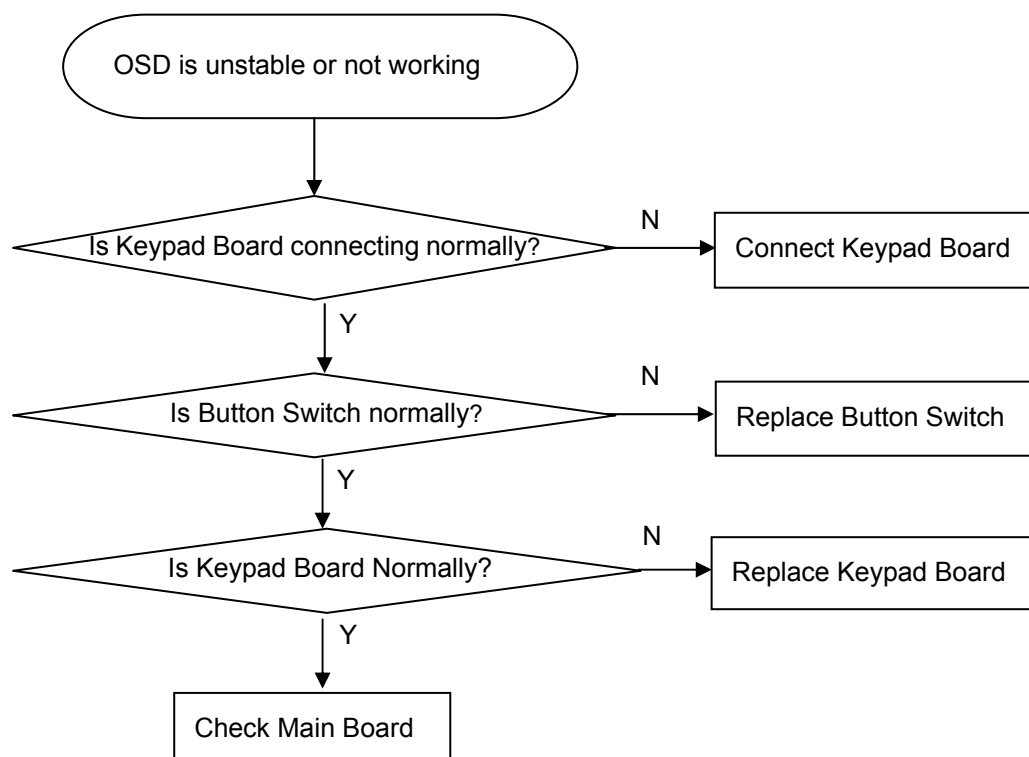8.2.2 Key Board

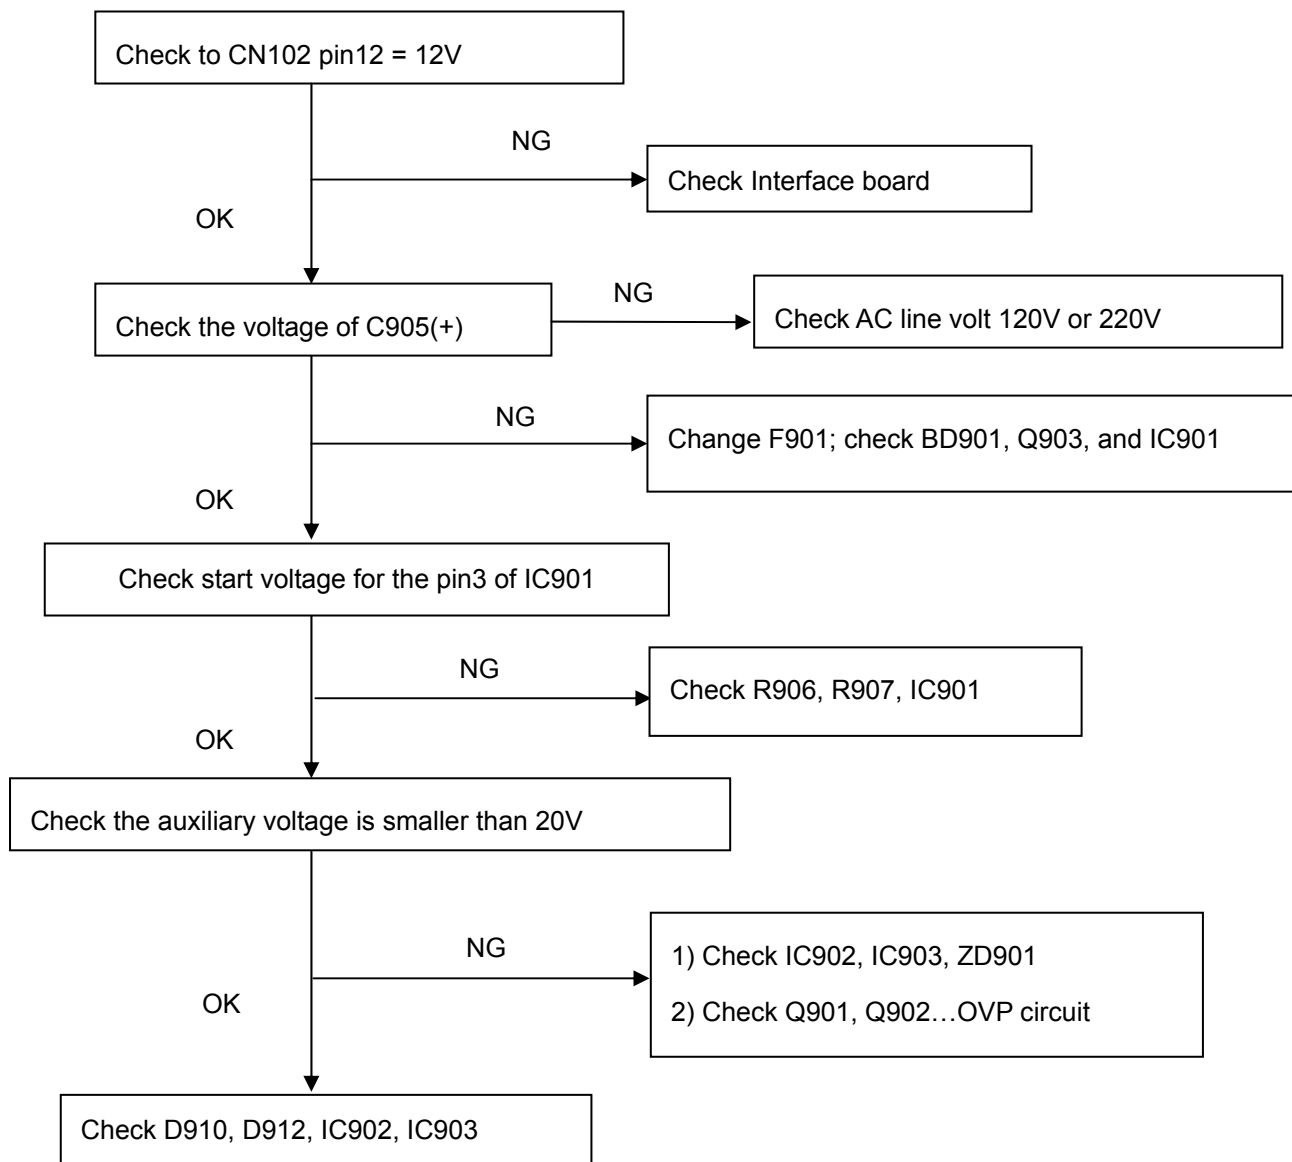8.2.3 Power Board

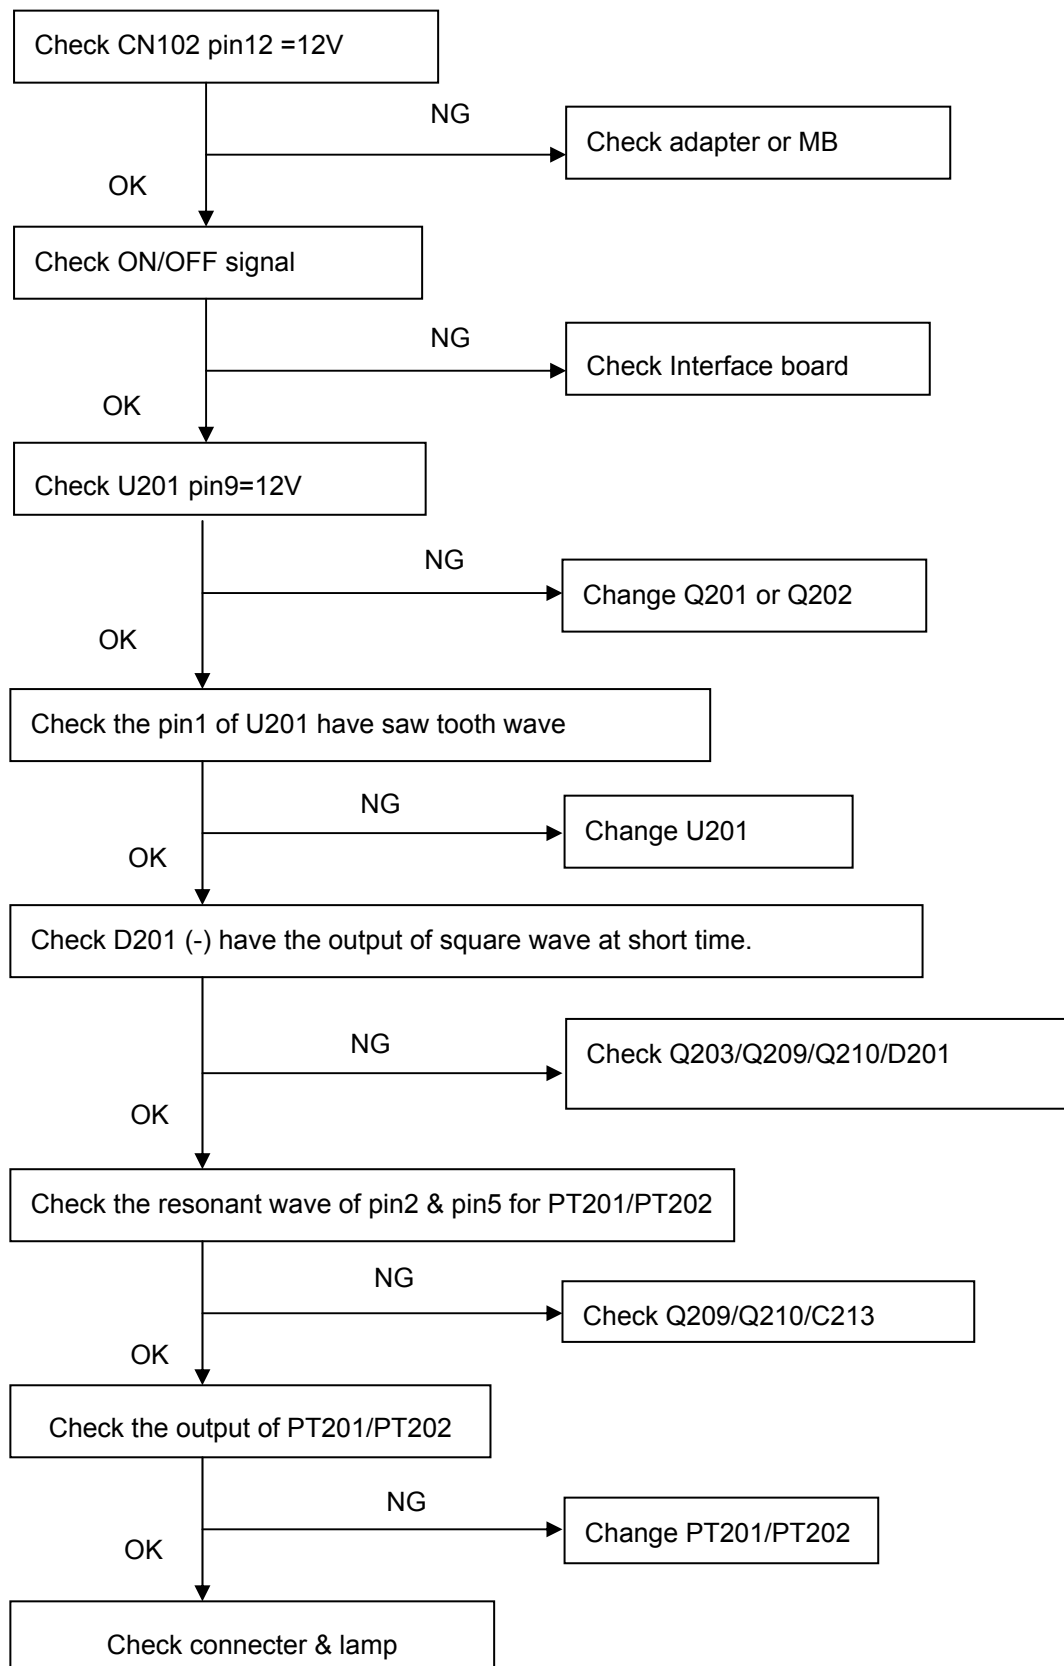

9. White- Balance, Luminance Adjustment

Approximately 30 minutes should be allowed for warm up before proceeding White-Balance adjustment.

1. How to do the Chroma-7120 MEM. Channel setting

A. Reference to chroma 7120 user guide

B. Use "SC" key and "NEXT" key to modify x,y,Y value and use "ID" key to modify the

TEXT description Following is the procedure to do white-balance adjust

2. Setting the color temp. you want

A. MEM.CHANNEL 3 C2 (7800 color):

7800 color temp. parameter is $x = 296 \pm 30$, $y = 311 \pm 30$, $Y \geq 180 \text{ cd/m}^2$.

B. MEM.CHANNEL 4 C1 (6500 color):

6500 color temp. parameter is $x = 313 \pm 30$, $y = 329 \pm 30$, $Y \geq 180 \text{ cd/m}^2$

3. Access into factory mode of MICRON F1760i

Turn on power, press the MENU button, pull out the power cord, and then plug the power cord. Then the factory OSD will be at the left top of the panel.

4. Bias adjustment:

Set the **Contrast**  to 50; Adjust the **Brightness**  to 80.

5. Gain adjustment:

Move cursor to "-F-" and press MENU key

A. Adjust C2(7800) color-temperature

1. Switch the Chroma-7120 to **RGB-Mode** (with press "MODE" button)

2. Switch the MEM. Channel to Channel 3 (with up or down arrow on chroma 7120)

3. The LCD-indicator on chroma 7120 will show $x = 296 \pm 30$, $y = 311 \pm 30$, $Y \geq 180 \text{ cd/m}^2$

4. Adjust the RED of color1 on factory window until chroma 7120 indicator reached the value R=100

5. Adjust the GREEN of color1 on factory window until chroma 7120 indicator reached the value G=100

6. Adjust the BLUE of color1 on factory window until chroma 7120 indicator reached the value B=100

7. Repeat above procedure (item 4,5,6) until chroma 7120 RGB value meet the tolerance $=100 \pm 2$

B. Adjust C1(6500) color-temperature

1. Switch the chroma-7120 to **RGB-Mode** (with press "MODE" button)

2. Switch the MEM.channel to Channel 4(with up or down arrow on chroma 7120)

3. The LCD-indicator on chroma 7120 will show $x = 313 \pm 30$, $y = 329 \pm 30$, $Y \geq 180 \text{ cd/m}^2$


4. Adjust the RED of color3 on factory window until chroma 7120 indicator reached the value R=100

5. Adjust the GREEN of color3 on factory window until chroma 7120 indicator reached the value G=100

6. Adjust the BLUE of color3 on factory window until chroma 7120 indicator reached the value B=100

7. Repeat above procedure (item 4,5,6) until chroma 7120 RGB value meet the tolerance $=100 \pm 2$

C. Turn the Power-button off to quit from factory mode.

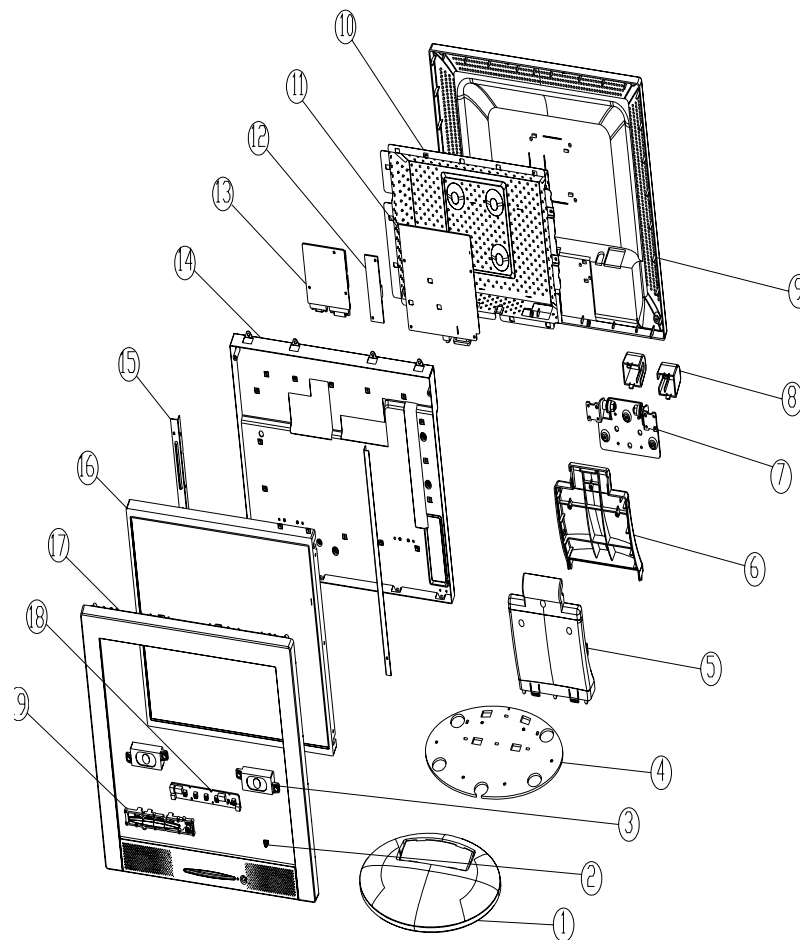10. Monitor Exploded View

ITEM	Description	Part NO.
1	SPEAKER	078G 311501 G
2	KEY BOARD	KEPC786KD4P
3	LED	081G 12 1 GP
4	KEY PAD	033G4561 AX L
5	BASE	034G 919 DC L
6	LCD HINGE	037G 448 1
7	STAND	N/A
8	CLAMP	N/A
9	VESA BKT	015G5791 1
10	REAR COVER	034G1081 DCB2L
11	SHIELD	085G6113 1
12	POWER BOARD	PWPC1742SEE1P
13	AUDIO BOARD	AUPC786A9SMTP
14	CONVERSION BOARD	CBPC786KS4MFP
15	MAIN FRAME	015G6068 1 B
16	PANEL	750GLS70U21
17	BEZEL	034G1087ADC 2L

11. BOM List

T76SM4MKC4MFAP

Location	Part No.	Description
	015G5908 2	
	015G6054 L 2	BRACKET
	015G6054 R 2	BRACKET
	015G6068 1 B	MAIN FRAME
	033G4344 DC 1L	HINGE COVER(L)
	033G4344 DC 2L	HINGE COVER (R)
	033G4561 AX L	KEY PAD
	040G 581689 4A	SERIAL LABEL FOR MONITOR
	040G 581724 1A	CARTON LABEL
	044G3231 15	EVA WASHER
	044G3265 1	EPSCUSHION(L)
	044G3265 2	EPS CUSHION
	044G3265767 4A	CARTON
	045G 88607	PE BAG FOR MONITOR
	050G 600 2	HANDLE1
	050G 600 3	HANDLE2
	052G 1185	MIDDLE TAPE FOR CARTON
	052G 1186	SMALL TAPE
	052G 1211 A	165MINIUM TAPE
V000	052G6020 1	PROTECT FILM
	052G6025 11523	INSULATE SHEET
	052G6025 11784	MYLAR
	085G6060600 4	SHILED
E089B	089G 715CAA D	SIGNAL CABLE
E089B	089G 715LAA D	SIGNAL CABLE
	089G402A18N IS	POWER CORD
	095G8014 16573	HARNESS
E095	095G8018 30518	LVDS
	0B1G1030 5128 CR3	SCREW
	0M1G 330 4128 CR3	SCREW
	0M1G 330 6128 CR3	SCREW
	0M1G1130 6128 CR3	SCREW
	0M1G1140 6128 CR3	SCREW
	0M1G1740 12128 CR3	SCREW
	0Q1G 330 10128 CR3	SCREW
	0Q1G 340 12128 CR3	SCREW

	0Q1G 340 16128 CR3	SCREW
	705G782KB34 01	BACK COVER ASS'Y
E750L	750GLS70EUG 4	SEC 17" AS7 PANEL
E750L	750GLS70EUG 5	SEC 17" ASJ PANEL
E750L	750GLS70U21	SEC 17" AS0 PANEL
	AUPC786A6P	AUDIO BOARD
	CBPC786KS4MFP	CONVERSION BOARD
	KEPC786KD4P	KEY BOARD
	PWPC1742SEE1P	POWER BOARD
	Q40G 17N767 4A	RATING LABEL
E095	S95G801830518	LVDS ASS'Y
	040G 58162435A	LABEL
	041G1700767 6A	USER MANUAL
	045G 76 28 RN	PE BAG FO MANUAL/BASE
	089G 173 56 18	AUDIO CABLE 1500mm BLACK/GREEN
	012G 381 1	RUBBER FOOT
	015G5711 1	BASE PLATE
	015G5791 1	VESA BKT
	033G4562 1	POWER LENS
	034G 917 DC L	SUPPORT FRONT
	034G 918 DC L	SUPPORT BACK
	034G 919 DC L	BASE
	034G1081 DCB2L	REAR COVER
	034G1087ADC 2L	BEZEL
	037G 448 1	LCD HINGE
E078	078G 311501 G	SPEAKER
E078	078G 311501 K	SPEAKER
	0Q1G 140 10128 CR3	SCREW
	0Q1G1030 10128 CR3	SCREW
	0Q1G1030 12128 CR3	SCREW
	0Q1G1040 8128 CR3	SCREW
CN202	033G802414C H	2*7PIN DUAL ROW RIGHT ANGLE H
U201	056G 616 1	IC E-TDA7496L ST
	090G6059 1	HEAT SINK
CN204	095G8014 3511	HARNESS
	AUPC786A9SMTP	AUDIO BOARD
CN601	033G801714A H	PIN HEADER 2*7 R/A
CN503	033G801724A H	PIN HEADER 24P 2.0mm
CN201	033G8027 12	WAFER 2*6P 2.0MM R/A

CN602	033G8027 16	WAFER 16PIN 2.0mm DIP
	040G 45762412B	CBPC LABEL
C204	067G215B221 4H	LOW E.S.R 220UF +-20% 25V
C202	067G215B221 4H	LOW E.S.R 220UF +-20% 25V
CN301	088G 35315F H	D-SUB 15PIN
CN301	088G 35315F HJ	SOC SUBD H 15P F
X401	093G 22 53	CRYSTAL 14.318MHzHC-49US
X401	093G 22 53 J	14.31818MHZ/32PF/49US
X601	093G 22 55 J	20MHz/20PF/49US
	AIC786KS4MFP	MAIN BOARD
JP102	033G3802 4H	WAFER 4P RIGHT ANGLE
CN103	033G8027 14 H	WAFER 14P 2.0MM DIP
SW105	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW101	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW102	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW103	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW104	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
DP101	081G 12 1 GP	LED GP32032M/R003-ZY-33
	AIK786KD4P	KEY BOARD FOR T562*
CN302	033G3278 3	3P PLUG B3B-XHA/JST
CN204	033G8021 2D U	3.5mm WAFER
CN203	033G8021 2D U	3.5mm WAFER
CN202	033G8021 2D U	3.5mm WAFER
CN201	033G8021 2D U	3.5mm WAFER
CN204	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN203	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN202	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN201	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN204	033G8021 2D ST	CONNECTOR
CN201	033G8021 2D ST	CONNECTOR
CN202	033G8021 2D ST	CONNECTOR
CN203	033G8021 2D ST	CONNECTOR
	040G 45762412B	CBPC LABEL
IC902	056G 139 3	PC123FY2 BY SHARP
IC902	056G 139 3A	PC123Y22FZOF
IC902	056G 139 3B	PC123 Y82FZ0F
IC901	056G 379 53	LD7552BN
Q212	057G 761 6	2SC5706-P-E
Q211	057G 761 6	2SC5706-P-E

Q210	057G 761 6	2SC5706-P-E
Q209	057G 761 6	2SC5706-P-E
R919	061G 2J398 59	0.39 OHM 2W
NR901	061G 58080 WT	8 OHM NCT
R903	061G152M104 64	100KOHM 5% 2W
C904	063G 107474 US	0.47UF +-20% 275VAC
C904	063G107K474 HS	X2 CAP 0.47UF K 275VAC
C214	063G210J2242AC	FILM CAP 0.22UF J 250V
C213	063G210J2242AC	FILM CAP 0.22UF J 250V
C214	064G180J224AAT	CAP 0.22UF 160V R79
C213	064G180J224AAT	CAP 0.22UF 160V R79
C216	065G 3J2206ET	22PF 5% SL 3KV TDK
C215	065G 3J2206ET	22PF 5% SL 3KV TDK
C217	065G 3J2206ET	22PF 5% SL 3KV TDK
C218	065G 3J2206ET	22PF 5% SL 3KV TDK
C901	065G305M2222BP	2200PF +-20%
C902	065G305M2222BP	2200PF +-20%
C902	065G305M2222E3	Y2,2200PF,M,250VAC
C901	065G305M2222E3	Y2,2200PF,M,250VAC
C902	065G305M2222EM	2200PF+-20% 250VAC/400VAC
C901	065G305M2222EM	2200PF+-20% 250VAC/400VAC
C913	065G306M4722BP	4700PF +-20% 400VAC
C913	065L306M472 2B	4700PF 400V 20% Y1-CAP
C925	067G 215102 3K	1000UF +-20% 16V
C925	067G215C102 3H	EC LESR 1000UF16V HERMEILZR102
C922	067G215L102 3N	KY16VB1000M-L 10*16
C925	067G215L102 3N	KY16VB1000M-L 10*16
C922	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C925	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C922	067G215S102 3K	ED1000UF 16V
C925	067G215V102 3N GP	KY10VB1000M-CC3 10*16
C925	067G215V102 3R GP	LOW E.S.R 100UF +-20% 16V
C905	067G305S10114H	100UF +-20% 400V
L203	073G 174 30 HA	FILTER
L204	073G 174 30 HA	FILTER
L204	073G 174 30LSA	FILTER
L203	073G 174 30LSA	FILTER
L204	073G 174 30YSA	FILTER
L203	073G 174 30YSA	FILTER

L904	073G 253 91 H	CHOKE COIL
L903	073G 253 91 H	CHOKE COIL
L904	073G 253 91 L	CHOKE BY LI TA
L903	073G 253 91 L	CHOKE BY LI TA
L904	073G 253 91 LS	CHOKE BY LI SHIN
L903	073G 253 91 LS	CHOKE BY LI SHIN
L202	073G 253515 L	CHOKE COIL
L201	073G 253515 L	CHOKE COIL
L202	073G 253515 S	CHOLE
L201	073G 253515 S	CHOLE
L201	073G 253515 Y	CHOKE
L202	073G 253515 Y	CHOKE
L201	073G 253515 LS	CHOKE
L202	073G 253515 LS	CHOKE
L902	073L 174 26LSG	COMMON CHOKE
L902	073L 174 26T1G	LINE LILT 0.45MM
PT202	080LL15T 7DNG	X'FMR
PT201	080LL15T 7DNG	X'FMR
PT202	080LL15T 7YSG	X'FMR
PT201	080LL15T 7YSG	X'FMR
T901	080LL17T 2 LG	ADAPTOR BY LITAI
T901	080LL17T 2 TG	X'FMR
T901	080LL17T 2LSG	ADAPTOR BY LISHIN
H1	085G6113 1	SHIELD
CN301	088G 30210K E	PHONE JACK 5PIN
BD901	093G 50460502	KBP206G
CN102	095G8021 12529	HARNESS
	705L 780 57 02	CN901 ASS'Y
	705L 780 57 15	D910/D912 ASS'Y
	705L 780 5702A	Q903 ASS'Y
	P1742SEE1SMTP	POWER BOARD FOR SMT
	033F 205 24	A2005H02-2*12P
	033F 303 30TD1	TD00-30H P2407P30
	033F205T 24	A2005T0B-00
	033F303TTD1	TD00-T 2407PS-00
	071F 100510	FERRITE CORE
R208	061G0603102	RST CHIP 1K 1/10W 5%
R207	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W

R201	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W
R210	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
R211	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
C212	065G0805101 31	CHIP 100PF 50V NPD 0805
C211	065G0805101 31	CHIP 100PF 50V NPD 0805
C213	065G0805104 32	CHIP 0.1U 50V X7R
C203	065G0805104 32	CHIP 0.1U 50V X7R
C206	065G0805474 22	CHIP 0.47UF 25V X7R 0805
C204	065G0805474 22	CHIP 0.47UF 25V X7R 0805
	AUPC786A9AIP	AUDIO BOARD
	040G 457624 1B	LABEL-CPU
U401	056G 562 86	TSU16AK PQFP-128 BY MST
U202	056G 563 7	AIC1084-33PM
U201	056G 563 31	AI1117D-1.8-EI
U603	056G 643 9	EM6353BZ2SP3B-2.9
U603	056G 643 5A	MAX810 STRG
U601	056G1125137 X	W78E065A40PL PLCC44
U301	056G1133 20	AT24C02N-10SU-2.7
U301	056G1133 34	M24C02-WMN6TP
U602	056G1133 56	M24C16-WMN6TP
U602	056G113356A	24LC16B/SNG SOIC-8PIN
Q204	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q202	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q201	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q602	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q601	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q203	057G 763 1	A03401 SOT23 BY AOS(A1)
RN602	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W
RN601	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W
R642	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R502	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R209	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB303	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB302	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB301	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R307	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R309	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R312	061G0603101	RST CHIPR 100 OHM +-5% 1/10W

R315	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R634	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R609	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R608	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R402	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R316	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R635	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R636	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R639	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R306	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R305	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R303	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R302	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R301	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R624	061G0603102	RST CHIP 1K 1/10W 5%
R311	061G0603102	RST CHIP 1K 1/10W 5%
R310	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603102	RST CHIP 1K 1/10W 5%
R605	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R604	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R602	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R601	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R407	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R406	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R405	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R404	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R606	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R607	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R613	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R614	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R615	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R625	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R626	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R627	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R318	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R317	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R314	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R308	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R211	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W

R208	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R206	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R204	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R202	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R215	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W
R617	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R618	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R313	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W
R403	061G0603390 0F	RST CHIPR 390 OHM +-1% 1/10W
R622	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R621	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R620	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R304	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R623	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R201	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R205	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R207	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R212	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R616	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R619	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R325	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R326	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R327	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
C617	065G0603101 32	100PF +-10% 50V X7R
C610	065G0603102 32	1000PF +-10% 50V X7R
C609	065G0603102 32	1000PF +-10% 50V X7R
C608	065G0603102 32	1000PF +-10% 50V X7R
C607	065G0603102 32	1000PF +-10% 50V X7R
C606	065G0603102 32	1000PF +-10% 50V X7R
C307	065G0603102 32	1000PF +-10% 50V X7R
C407	065G0603104 32	CHIP 0.1UF 50V X7R
C408	065G0603104 32	CHIP 0.1UF 50V X7R
C409	065G0603104 32	CHIP 0.1UF 50V X7R
C410	065G0603104 32	CHIP 0.1UF 50V X7R
C411	065G0603104 32	CHIP 0.1UF 50V X7R
C412	065G0603104 32	CHIP 0.1UF 50V X7R
C413	065G0603104 32	CHIP 0.1UF 50V X7R
C415	065G0603104 32	CHIP 0.1UF 50V X7R
C416	065G0603104 32	CHIP 0.1UF 50V X7R

C417	065G0603104 32	CHIP 0.1UF 50V X7R
C418	065G0603104 32	CHIP 0.1UF 50V X7R
C420	065G0603104 32	CHIP 0.1UF 50V X7R
C601	065G0603104 32	CHIP 0.1UF 50V X7R
C511	065G0603104 32	CHIP 0.1UF 50V X7R
C510	065G0603104 32	CHIP 0.1UF 50V X7R
C428	065G0603104 32	CHIP 0.1UF 50V X7R
C426	065G0603104 32	CHIP 0.1UF 50V X7R
C425	065G0603104 32	CHIP 0.1UF 50V X7R
C421	065G0603104 32	CHIP 0.1UF 50V X7R
C423	065G0603104 32	CHIP 0.1UF 50V X7R
C618	065G0603104 32	CHIP 0.1UF 50V X7R
C613	065G0603104 32	CHIP 0.1UF 50V X7R
C612	065G0603104 32	CHIP 0.1UF 50V X7R
C201	065G0603104 32	CHIP 0.1UF 50V X7R
C203	065G0603104 32	CHIP 0.1UF 50V X7R
C205	065G0603104 32	CHIP 0.1UF 50V X7R
C207	065G0603104 32	CHIP 0.1UF 50V X7R
C210	065G0603104 32	CHIP 0.1UF 50V X7R
C406	065G0603104 32	CHIP 0.1UF 50V X7R
C404	065G0603104 32	CHIP 0.1UF 50V X7R
C401	065G0603104 32	CHIP 0.1UF 50V X7R
C313	065G0603104 32	CHIP 0.1UF 50V X7R
C216	065G0603104 32	CHIP 0.1UF 50V X7R
C214	065G0603104 32	CHIP 0.1UF 50V X7R
C212	065G0603104 32	CHIP 0.1UF 50V X7R
C402	065G0603220 31	CER1 0603 NP0 50V 22P PM
C403	065G0603220 31	CER1 0603 NP0 50V 22P PM
C602	065G0603220 31	CER1 0603 NP0 50V 22P PM
C604	065G0603220 31	CER1 0603 NP0 50V 22P PM
C312	065G0603221 31	CER1 0603 NP0 50V 220P P
C605	065G0603224 17	CAP:CER 0.22UF-20%-80% 1
C311	065G0603330 31	CER1 0603 NP0 50V 33P PM
C310	065G0603473 32	CHIP 0.047UF 50V X7R
C309	065G0603473 32	CHIP 0.047UF 50V X7R
C308	065G0603473 32	CHIP 0.047UF 50V X7R
C306	065G0603473 32	CHIP 0.047UF 50V X7R
C305	065G0603473 32	CHIP 0.047UF 50V X7R
C304	065G0603473 32	CHIP 0.047UF 50V X7R

C217	065G0603683 32	CHIP 0.068UF 50L X7R
C206	065G0805105 22	CHIP 1UF 25V X7R 0805
C611	065G0805105 22	CHIP 1UF 25V X7R 0805
FB304	071G 56G151 A	TB160808G151
FB603	071G 56Z601	CHIP BEAD 600 OHM 0805
FB602	071G 56Z601	CHIP BEAD 600 OHM 0805
FB601	071G 56Z601	CHIP BEAD 600 OHM 0805
FB406	071G 56Z601	CHIP BEAD 600 OHM 0805
FB405	071G 56Z601	CHIP BEAD 600 OHM 0805
FB404	071G 56Z601	CHIP BEAD 600 OHM 0805
FB403	071G 56Z601	CHIP BEAD 600 OHM 0805
FB402	071G 56Z601	CHIP BEAD 600 OHM 0805
FB401	071G 56Z601	CHIP BEAD 600 OHM 0805
FB201	071G 56Z601	CHIP BEAD 600 OHM 0805
FB402	071G 56Z601 M	CHIP BEAD 600OHM
FB403	071G 56Z601 M	CHIP BEAD 600OHM
FB404	071G 56Z601 M	CHIP BEAD 600OHM
FB405	071G 56Z601 M	CHIP BEAD 600OHM
FB603	071G 56Z601 M	CHIP BEAD 600OHM
FB602	071G 56Z601 M	CHIP BEAD 600OHM
FB601	071G 56Z601 M	CHIP BEAD 600OHM
FB406	071G 56Z601 M	CHIP BEAD 600OHM
FB401	071G 56Z601 M	CHIP BEAD 600OHM
FB201	071G 56Z601 M	CHIP BEAD 600OHM
D323	093G 39147	TZMC5V6
D322	093G 39147	TZMC5V6
D321	093G 39147	TZMC5V6
D320	093G 39147	TZMC5V6
D319	093G 39147	TZMC5V6
D318	093G 39147	TZMC5V6
D317	093G 39147	TZMC5V6
D323	093G 39149	MLL5232B BY FULL POWER SMT
D322	093G 39149	MLL5232B BY FULL POWER SMT
D321	093G 39149	MLL5232B BY FULL POWER SMT
D320	093G 39149	MLL5232B BY FULL POWER SMT
D319	093G 39149	MLL5232B BY FULL POWER SMT
D318	093G 39149	MLL5232B BY FULL POWER SMT
D317	093G 39149	MLL5232B BY FULL POWER SMT
D304	093G 64 42 P	BAV70 SOT-23

D304	093G 64 42 PP	BAV70 SOT-23
D303	093G 6433P	BAV99
D302	093G 6433P	BAV99
D301	093G 6433P	BAV99
D201	093G1004 3	SS14
D202	093G1020 1 S	GS1D
	715G1237 2 3	MAIN BOARD PCB
	715G1058 3	KEY BOARD PCB
CN901	087G 501 12 CJ	AC SOCKET
CN901	087G 501 12 RF	AC SOCKET
	095G205S354022	HARNESS
	096G 29 6	H.S. TUBE
	090G6064 1	HEAT SINK
D912	093G 60217	FMB29L 10A 100V SANKEN
D910	093G 60217	FMB29L 10A 100V SANKEN
D912	093G 60236	DIODE FMB-26L TO-220 SANKEN
D910	093G 60250	FCH10U10
D912	093G 60251	FCQ10U06
	0M1G1730 8128 CR3	SCREW
Q903	057G 667 20	AP2761I-A TO-220CFM
Q903	057G 723 3B	2SK2761-01MR
Q903	057G 724 4	2SK2996
Q903	057G 724 4A	STP9NK60ZEP
	090G 407 2	HEAT SINK
	0M1G1730 8128 CR3	SCREW
Q203	056G 566 10	SI4431DY-T1-SMT
Q204	056G 566 10	SI4431DY-T1-SMT
U201	056G 622 1	BA9741F-SMT
Q204	056G 763 4	RSS050P03
Q203	056G 763 4	RSS050P03
Q206	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q205	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q208	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q207	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q202	057G 760 4	DTA144WKA BY ROHM SMT
Q201	057G 760 5	DTC144WKA BY ROHM SMT
Q202	057G 760 4B	PDTA144WK SOT346
Q201	057G 760 5B	PDTC144WK SOT346
Q204	057G 763 3	AO4411 SO-8

Q203	057G 763 3	AO4411 SO-8
Q204	057G 763 3B	AM9435P.T1-PF SO-8
Q203	057G 763 3B	AM9435P.T1-PF SO-8
R217	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R216	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R925	061G0603362	RST CHIPR 3.6 KOHM +-5% 1/10W
R929	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R213	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R212	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R927	061G0805102	CHIP 1KOHM 1/10W
R928	061G0805102	CHIP 1KOHM 1/10W
R926	061G0805242	RST CHIPR 2.4 KOHM +-5% 1/8W
R924	061G0805333	RST CHIPR 33 KOHM +-5% 1/8W
R208	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R209	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R917	061G1206100	10 OHM 1/8W
R911	061G1206100 3F	RST CHIPR 100 KOHM +-1% 1/4W
R918	061G1206103	10 KOHM 1/8W
R916	061G1206104	RST CHIPR 100 KOHM +-5% 1/4W
R902	061G1206105	1M 1206
R901	061G1206105	1M 1206
R231	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R230	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R229	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R228	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R227	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R226	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R225	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R224	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R930	061G1206471	470 1206
R913	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R907	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R906	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R905	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
R904	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
R910	061G1206820 2F	RST CHIPR 82 KOHM +-1% 1/4W
C927	065G0805104 32	CHIP 0.1U 50V X7R
C910	065G0805105 22	CHIP 1UF 25V X7R 0805
C209	065G0805105 27	CHIP 1UF Y5V 0805

C225	065G0805105 27	CHIP 1UF Y5V 0805
C224	065G0805105 27	CHIP 1UF Y5V 0805
C220	065G0805105 27	CHIP 1UF Y5V 0805
C219	065G0805105 27	CHIP 1UF Y5V 0805
C212	065G0805105 27	CHIP 1UF Y5V 0805
C211	065G0805105 27	CHIP 1UF Y5V 0805
C210	065G0805105 27	CHIP 1UF Y5V 0805
C203	065G0805105 27	CHIP 1UF Y5V 0805
D204	093G 39S 3 T	BZT52-C11
D203	093G 39S 3 T	BZT52-C11
D204	093G 39S 8 T	RLZ11B LLDS
D203	093G 39S 8 T	RLZ11B LLDS
ZD904	093G 39S 16 T	SML4737A/1
ZD904	093G 39S 19 T	PTZ7.5B
D202	093G2004 1	SMAL240LVXRO-SMT
D201	093G2004 1	SMAL240LVXRO-SMT
D202	093G2004 3	SSM24PT
D201	093G2004 3	SSM24PT
D201	093G2004 2A	SM240A DO-214AC
D202	093G2004 2A	SM240A DO-214AC
D202	093G3004 1	SMAL340XXXRO 3A 40V SMA FULL P
D201	093G3004 1	SMAL340XXXRO 3A 40V SMA FULL P
D202	093G3004 2	SR34 PAN JIT
D201	093G3004 2	SR34 PAN JIT
	PW1742SEE1AIP	POWER BOARD FOR AI
C209	067G 305109 7T	1.0UF +-20% 50V 105 尼ん
	715G1144 1 IO	AUIDO BOARD PCB
R212	061G 60220152T	CFR 200 OHM +-5% 1/6W
C210	067G 305109 7T	1.0UF +-20% 50V 105 尼ん
T901	006G 31502	1.5MM RIVET
Q903	006G 31502	1.5MM RIVET
PT202	006G 31502	1.5MM RIVET
PT201	006G 31502	1.5MM RIVET
NR901	006G 31502	1.5MM RIVET
L902	006G 31502	1.5MM RIVET
C905	006G 31502	1.5MM RIVET
IC904	056G 158 4 T	H431BA
IC903	056G 158 4 T	H431BA
IC904	056G 158 10 T	IC AZ431AZ-AE1 TO-92 BY AAC

IC903	056G 158 10 T	IC AZ431AZ-AE1 TO-92 BY AAC
R243	061G 17210252T	1K OHM 5% 1/4W
R244	061G 17210252T	1K OHM 5% 1/4W
R912	061G 17210252T	1K OHM 5% 1/4W
R909	061G 17224152T	240 OHM 5% 1/4W
R908	061G 17268952T	6.8OHM 5% 1/4W
R920	061G 20747052T	47 OHM 1/2W
R922	061G 20747052T	47 OHM 1/2W
R204	061G 60110352T	RST CFR 10KOHM +-2% 1/6W
R218	061G 60210152T	100OHM +- 5% 1/6W
R219	061G 60210152T	100OHM +- 5% 1/6W
R233	061G 60210252T	CFR 1K OHM +-5% 1/6W
R232	061G 60210252T	CFR 1K OHM +-5% 1/6W
R203	061G 60210352T	CFR 10KOHM +-5% 1/6W
R202	061G 60210352T	CFR 10KOHM +-5% 1/6W
R239	061G 60212352T	12KOHM 5% 1/6W
R238	061G 60212352T	12KOHM 5% 1/6W
R223	061G 60212352T	12KOHM 5% 1/6W
R222	061G 60212352T	12KOHM 5% 1/6W
R221	061G 60215352T	15KOHM 5% 1/6W
R220	061G 60215352T	15KOHM 5% 1/6W
R211	061G 60215352T	15KOHM 5% 1/6W
R210	061G 60215352T	15KOHM 5% 1/6W
R215	061G 60222252T	2.2K 5% 1/6W
R214	061G 60222252T	2.2K 5% 1/6W
R201	061G 60230352T	30KOHM 5% 1/6W
R206	061G 60247352T	47KOHM 5% 1/6W
R205	061G 60247352T	47KOHM 5% 1/6W
R241	061G 60251352T	51KOHM +-5% 1/6W
R240	061G 60251352T	51KOHM +-5% 1/6W
R237	061G 60262152T	620 OHM 5% 1/6W
R236	061G 60262152T	620 OHM 5% 1/6W
R235	061G 60291152T	CFR 910 OHM+-5% 1/6W
R234	061G 60291152T	CFR 910 OHM+-5% 1/6W
C911	064G700J1020AT	1000PF 50V PEN
C204	064G700J1040AT	0.1UF 50V PEN
C206	064G700J1040AT	0.1UF 50V PEN
C205	064G700J1040AT	0.1UF 50V PEN
C936	064G700J1040AT	0.1UF 50V PEN

C222	064G701J4740AT	0.47uF 50V
C221	064G701J4740AT	0.47uF 50V
C906	065G 2K152 1T6052	1.5NF/2KV Y5P +-10%
C906	065G 2K152 1T6285	1.5NF/2KV Y5P +-10%
C906	065G 2K152 1T6921	1.5NF/2KV Y5P +-10%
C208	065G 44233113T	330PJNPO 50V
C912	065G 444331 5T	330P/50V DIP
C399	065G 444471 5T	470P/50V DIP
C398	065G 444471 5T	470P/50V DIP
C908	065G 450104 7T	0.1UF +80-20% 50V Y5V
C921	065G517K102 5T6213	1000PF,K,500V,Y5P
C920	065G517K102 5T6213	1000PF,K,500V,Y5P
C921	065G517K102 5T6285	1000PF 10% Y5P 500V
C920	065G517K102 5T6285	1000PF 10% Y5P 500V
C921	065L517K102 5T6052	1000PF 10% Y5P 500V
C920	065L517K102 5T6052	1000PF 10% Y5P 500V
C926	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C924	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C223	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C201	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C223	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
C201	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
C926	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
C924	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
FB902	071G 55 19 T	FERRITE BEAD D9X3. 5X0.8
FB901	071G 55 29	FERRITE BEAD
F901	084G 55 2	MET2.50
ZD902	093G 39 5452T	HZ12B2-E
ZD903	093G 39 7752T	HZ5C1-E
D901	093G 6026T52T	RECTIFIER DIODE FR107
D902	093G 6038P52T	PS102R
D902	093G 6038T52T	FR103
D210	093G 64 1152T	1N4148
D209	093G 64 1152T	1N4148
D208	093G 64 1152T	1N4148
D207	093G 64 1152T	1N4148
D206	093G 64 1152T	1N4148
D205	093G 64 1152T	1N4148
	715G1103 3 17	POWER BOARD PCB

T782KS4MKWMFA

Location	Part No.	Description
	015G5908 2	BRACKET
	015G6054 L 2	BRACKET
	015G6054 R 2	BRACKET
	015G6068 1 B	MAIN FRAME
	033G4344 DC 1L	HINGE COVER(L)
	033G4344 DC 2L	HINGE COVER (R)
	033G4561 AX L	KEY PAD
	040G 190767 7A	RATING LABEL
	040G 58162435A	LABEL
	040G 581689 4A	SERIAL LABEL FOR MONITOR
	040G 581724 1A	CARTON LABEL
	044G3231 15	EVA WASHER
	044G3265 1	EPSCUSHION(L)
	044G3265 2	EPS CUSHION
	044G3265767 4A	CARTON
	045G 88607	PE BAG FOR MONITOR
	050G 600 2	HANDLE1
	050G 600 3	HANDLE2
	052G 1185	MIDDLE TAPE FOR CARTON
	052G 1186	SMALL TAPE
	052G 1211 A	165MINIUM TAPE
V000	052G6020 1	PROTECT FILM
	052G6025 11523	INSULATE SHEET
	052G6025 11784	MYLAR
	085G6060600 4	SHILED
E089B	089G 715CAA D	SIGNAL CABLE
E089B	089G 715LAA D	SIGNAL CABLE
	089G402A18N IS	POWER CORD
	095G8014 16573	HARNESS
E095	095G8018 30518	LVDS 线
	0B1G1030 5128 CR3	SCREW
	0M1G 330 4128 CR3	SCREW
	0M1G 330 6128 CR3	SCREW
	0M1G1130 6128 CR3	SCREW
	0M1G1140 6128 CR3	SCREW
	0M1G1740 12128 CR3	SCREW
	0Q1G 330 10128 CR3	SCREW
	0Q1G 340 12128 CR3	SCREW

	0Q1G 340 16128 CR3	SCREW
	705L782KB34158	BACK COVER ASS'Y
E750L	750GLS70EUG 4	SEC 17" AS7 PANEL
E750L	750GLS70EUG 5	SEC 17" ASJ PANEL
E750L	750GLS70U21	SEC 17" AS0 PANEL
	AUPC782A6	AUDIO BOARD
	CBPC780KS4MF	CONVERSION BOARD
	KEPC562KD4	KEY BOARD FOR T562K*
	PWPC7425A3E30	POWER BOARD
E095	S95G801830518	LVDS ASS'Y
	041G1700767 6A	USER MANUAL
	045G 76 28 RN	PE BAG FO MANUAL/BASE
	089G 173 56 18	AUDIO CABLE 1500mm BLACK/GREEN
	012G 381 1	RUBBER FOOT
	015G5711 1	BASE PLATE
	015G5791 1	VESA BKT
	033G4562 1	POWER LENS
	034G 917 DC L	SUPPORT FRONT
	034G 918 DC L	SUPPORT BACK
	034G 919 DC L	BASE
	034G1081 DCB2L	REAR COVER
	034G1087ADC 2L	BEZEL
	037G 448 1	LCD HINGE
E078	078G 311501 G	SPEAKER
E078	078G 311501 K	SPEAKER
	0Q1G 140 10128 CR3	SCREW
	0Q1G1030 10128 CR3	SCREW
	0Q1G1030 12128 CR3	SCREW
	0Q1G1040 8128 CR3	SCREW
CN202	033G802414C H	2*7PIN DUAL ROW RIGHT ANGLE H
U201	056G 616 1	IC E-TDA7496L ST
	090G6059 1	HEAT SINK
CN204	095G8014 3511	HARNESS
	AUPC780A9SMT	AUDIO BOARD
CN601	033G801714A H	PIN HEADER 2*7 R/A
CN503	033G801724A H	PIN HEADER 24P 2.0mm
CN201	033G8027 12	WAFER 2*6P 2.0MM R/A
CN602	033G8027 16	WAFER 16PIN 2.0mm DIP
	040G 45762412B	CBPC LABEL
C204	067G215B221 4H	LOW E.S.R 220UF +-20% 25V

C202	067G215B221 4H	LOW E.S.R 220UF +-20% 25V
CN301	088G 35315F H	D-SUB 15PIN
CN301	088G 35315F HJ	SOC SUBD H 15P F
X401	093G 22 53	CRYSTAL 14.318MHZHC-49US
X401	093G 22 53 J	14.31818MHZ/32PF/49US
X601	093G 22 55 H	20MHZ/20PF/49US
X601	093G 22 55 J	20MHZ/20PF/49US
	AIC780KS4MF	MAIN BOARD
JP102	033G3802 4H	WAFER 4P RIGHT ANGLE
CN103	033G8027 14 H	WAFER 14P 2.0MM DIP
SW104	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW103	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW102	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW101	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW105	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW105	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW104	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW103	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW102	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW101	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
DP101	081G 12 1 GP	LED GP32032M/R003-ZY-33
	AIK562KD4	KEY BOARD FOR T562K*
CN302	033G3278 3	3P PLUG B3B-XHA/JST
CN201	033G8021 2D U	3.5mm WAFER
CN202	033G8021 2D U	3.5mm WAFER
CN203	033G8021 2D U	3.5mm WAFER
CN204	033G8021 2D U	3.5mm WAFER
CN204	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN203	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN202	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN201	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN204	033G8021 2D ST	CONNECTOR
CN203	033G8021 2D ST	CONNECTOR
CN202	033G8021 2D ST	CONNECTOR
CN201	033G8021 2D ST	CONNECTOR
CN202	033G8021 2D ST	CONNECTOR
CN203	033G8021 2D ST	CONNECTOR
CN204	033G8021 2D ST	CONNECTOR
CN201	033G8021 2D ST	CONNECTOR
	040G 45762412B	CBPC LABEL

	052G 1174 2A	3M 69#
IC902	056G 139 3	PC123FY2 BY SHARP
IC902	056G 139 3A	PC123Y22FZOF
IC902	056G 139 3B	PC123 Y82FZ0F
IC901	056G 379 77	IC LD7552BPN DIP-8
Q212	057G 761 6	2SC5706-P-E
Q211	057G 761 6	2SC5706-P-E
Q210	057G 761 6	2SC5706-P-E
Q209	057G 761 6	2SC5706-P-E
R919	061G 2J398 59	0.39 OHM 2W
NR901	061G 58080 WT	8 OHM NCT
R903	061G152M104 64	100KOHM 5% 2W
C904	063G 107474 US	0.47UF +-20% 275VAC
C904	063G107K474 HS	X2 CAP 0.47UF K 275VAC
C213	064G180J224AAT	CAP 0.22UF 160V R79
C214	064G180J224AAT	CAP 0.22UF 160V R79
C906	065G 2K152 5E6921	1500 PF 10% 2KV Y5P
C218	065G 3J2206ET	22PF 5% SL 3KV TDK
C217	065G 3J2206ET	22PF 5% SL 3KV TDK
C216	065G 3J2206ET	22PF 5% SL 3KV TDK
C215	065G 3J2206ET	22PF 5% SL 3KV TDK
C901	065G305M2222BP	2200PF +-20%
C902	065G305M2222BP	2200PF +-20%
C901	065G305M2222E3	Y2,2200PF,M,250VAC
C902	065G305M2222E3	Y2,2200PF,M,250VAC
C902	065G305M2222EM	2200PF+-20% 250VAC/400VAC
C901	065G305M2222EM	2200PF+-20% 250VAC/400VAC
C913	065G306M4722BP	4700PF +-20% 400VAC
C906	065L 2K152 5E6052	1500PF +-10% 2KV Y5P
C906	065L 2K152 5E6285	1500 PF 10% 2KV Y5P
C913	065L306M472 2B	4700PF 400V 20% Y1-CAP
C922	067G215L102 3N	KY16VB1000M-L 10*16
C925	067G215L102 3N	KY16VB1000M-L 10*16
C922	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C925	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C922	067G215S102 3K	ED1000UF 16V
C925	067G215S102 3K	ED1000UF 16V
C925	067G215V102 3N GP	KY10VB1000M-CC3 10*16
C922	067G215V102 3N GP	KY10VB1000M-CC3 10*16
C922	067G215V102 3R GP	LOW E.S.R 100UF +-20% 16V

C925	067G215V102 3R GP	LOW E.S.R 100UF +-20% 16V
C905	067G215Y10115K	ELCAP 105℃ 100UF M 450V
C905	067G305R10115H	ELCAP 105℃ 100UF M 450V
L204	073G 174 30 HA	FILTER
L203	073G 174 30 HA	FILTER
L204	073G 174 30DNA	LINE FILTER
L203	073G 174 30DNA	LINE FILTER
L204	073G 174 30LSA	FILTER
L203	073G 174 30LSA	FILTER
L203	073G 174 30YSA	FILTER
L204	073G 174 30YSA	FILTER
L903	073G 253 91 H	CHOKE COIL
L904	073G 253 91 H	CHOKE COIL
L903	073G 253 91 L	CHOKE BY LI TA
L904	073G 253 91 L	CHOKE BY LI TA
L904	073G 253 91 LS	CHOKE BY LI SHIN
L903	073G 253 91 LS	CHOKE BY LI SHIN
L201	073G 253515 L	CHOKE COIL
L202	073G 253515 L	CHOKE COIL
L202	073G 253515 S	CHOLE
L201	073G 253515 S	CHOLE
L202	073G 253515 Y	CHOKE
L201	073G 253515 Y	CHOKE
L201	073G 253515 LS	CHOKE
L202	073G 253515 LS	CHOKE
L902	073L 174 26LSG	COMMON CHOKE
L902	073L 174 26T1G	LINE LILT 0.45MM
PT201	080LL15T 7DNG	X'FMR
PT202	080LL15T 7DNG	X'FMR
PT201	080LL15T 7YSG	X'FMR
PT202	080LL15T 7YSG	X'FMR
T901	080LL17T 2 LG	ADAPTOR BY LITAI
T901	080LL17T 2 NG	TRANSFORMER
T901	080LL17T 2 TG	X'FMR
T901	080LL17T 2LSG	ADAPTOR BY LISHIN
H1	085G6113 1	SHIELD
CN301	088G 30210K E	PHONE JACK 5PIN
BD901	093G 50460502	KBP206G
CN102	095G8021 12529	HARNESS
	705L 780 57 02	CN901 ASS'Y

	705L 780 57 18	D910/D912 ASS'Y
	705L 780 5702A	Q903 ASS'Y
	PW7425A3E12SMT	POWER BOARD
	033F 205 24	A2005H02-2*12P
	033F 303 30TD1	TD00-30H P2407P30
	033F205T 24	A2005T0B-00
	033F303TTD1	TD00-T 2407PS-00
	071F 100510	FERRITE CORE
R208	061G0603102	RST CHIP 1K 1/10W 5%
R207	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W
R201	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W
R211	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
R210	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
C211	065G0805101 31	CHIP 100PF 50V NPD 0805
C212	065G0805101 31	CHIP 100PF 50V NPD 0805
C203	065G0805104 32	CHIP 0.1U 50V X7R
C213	065G0805104 32	CHIP 0.1U 50V X7R
C206	065G0805474 22	CHIP 0.47UF 25V X7R 0805
C204	065G0805474 22	CHIP 0.47UF 25V X7R 0805
	AUPC780A9AI	AUDIO BOARD
	040G 457624 1B	LABEL-CPU
U401	056G 562 86	TSU16AK PQFP-128 BY MST
U202	056G 563 7	AIC1084-33PM
U201	056G 563 31	AI1117D-1.8-EI
U603	056G 643 5A	MAX810 STRG
U601	056G1125137 X	W78E065A40PL PLCC44
U301	056G1133 20	AT24C02N-10SU-2.7
U301	056G1133 34	M24C02-WMN6TP
U602	056G1133 56	M24C16-WMN6TP
U602	056G113356A	24LC16B/SNG SOIC-8PIN
Q201	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q204	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q202	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q601	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q602	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q203	057G 763 1	A03401 SOT23 BY AOS(A1)
RN601	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W
RN602	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W

R642	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R502	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R209	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB303	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB302	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB301	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R316	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R402	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R608	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R609	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R634	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R635	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R315	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R312	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R309	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R307	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R306	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R305	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R303	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R302	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R301	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R639	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R636	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R624	061G0603102	RST CHIP 1K 1/10W 5%
R311	061G0603102	RST CHIP 1K 1/10W 5%
R310	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603102	RST CHIP 1K 1/10W 5%
R405	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R406	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R407	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R601	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R602	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R604	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R605	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R606	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R607	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R613	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R614	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R615	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R625	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W

R626	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R627	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R404	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R202	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R204	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R206	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R208	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R211	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R308	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R314	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R317	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R318	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R215	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W
R618	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R617	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R313	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W
R403	061G0603390 0F	RST CHIPR 390 OHM +-1% 1/10W
R623	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R622	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R621	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R620	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R304	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R619	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R616	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R212	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R207	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R205	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R201	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R325	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R326	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R327	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
C617	065G0603101 32	100PF +-10% 50V X7R
C607	065G0603102 32	1000PF +-10% 50V X7R
C606	065G0603102 32	1000PF +-10% 50V X7R
C307	065G0603102 32	1000PF +-10% 50V X7R
C608	065G0603102 32	1000PF +-10% 50V X7R
C609	065G0603102 32	1000PF +-10% 50V X7R
C610	065G0603102 32	1000PF +-10% 50V X7R
C410	065G0603104 32	CHIP 0.1UF 50V X7R
C411	065G0603104 32	CHIP 0.1UF 50V X7R

C412	065G0603104 32	CHIP 0.1UF 50V X7R
C413	065G0603104 32	CHIP 0.1UF 50V X7R
C415	065G0603104 32	CHIP 0.1UF 50V X7R
C416	065G0603104 32	CHIP 0.1UF 50V X7R
C417	065G0603104 32	CHIP 0.1UF 50V X7R
C418	065G0603104 32	CHIP 0.1UF 50V X7R
C420	065G0603104 32	CHIP 0.1UF 50V X7R
C421	065G0603104 32	CHIP 0.1UF 50V X7R
C423	065G0603104 32	CHIP 0.1UF 50V X7R
C425	065G0603104 32	CHIP 0.1UF 50V X7R
C426	065G0603104 32	CHIP 0.1UF 50V X7R
C428	065G0603104 32	CHIP 0.1UF 50V X7R
C510	065G0603104 32	CHIP 0.1UF 50V X7R
C511	065G0603104 32	CHIP 0.1UF 50V X7R
C601	065G0603104 32	CHIP 0.1UF 50V X7R
C612	065G0603104 32	CHIP 0.1UF 50V X7R
C613	065G0603104 32	CHIP 0.1UF 50V X7R
C618	065G0603104 32	CHIP 0.1UF 50V X7R
C409	065G0603104 32	CHIP 0.1UF 50V X7R
C201	065G0603104 32	CHIP 0.1UF 50V X7R
C203	065G0603104 32	CHIP 0.1UF 50V X7R
C205	065G0603104 32	CHIP 0.1UF 50V X7R
C207	065G0603104 32	CHIP 0.1UF 50V X7R
C210	065G0603104 32	CHIP 0.1UF 50V X7R
C212	065G0603104 32	CHIP 0.1UF 50V X7R
C214	065G0603104 32	CHIP 0.1UF 50V X7R
C408	065G0603104 32	CHIP 0.1UF 50V X7R
C407	065G0603104 32	CHIP 0.1UF 50V X7R
C406	065G0603104 32	CHIP 0.1UF 50V X7R
C404	065G0603104 32	CHIP 0.1UF 50V X7R
C401	065G0603104 32	CHIP 0.1UF 50V X7R
C313	065G0603104 32	CHIP 0.1UF 50V X7R
C216	065G0603104 32	CHIP 0.1UF 50V X7R
C604	065G0603220 31	CER1 0603 NP0 50V 22P PM
C602	065G0603220 31	CER1 0603 NP0 50V 22P PM
C403	065G0603220 31	CER1 0603 NP0 50V 22P PM
C402	065G0603220 31	CER1 0603 NP0 50V 22P PM
C312	065G0603221 31	CER1 0603 NP0 50V 220P P
C605	065G0603224 17	CAP:CER 0.22UF-20%-80% 1
C311	065G0603330 31	CER1 0603 NP0 50V 33P PM

C310	065G0603473 32	CHIP 0.047UF 50V X7R
C309	065G0603473 32	CHIP 0.047UF 50V X7R
C308	065G0603473 32	CHIP 0.047UF 50V X7R
C306	065G0603473 32	CHIP 0.047UF 50V X7R
C305	065G0603473 32	CHIP 0.047UF 50V X7R
C304	065G0603473 32	CHIP 0.047UF 50V X7R
C217	065G0603683 32	CHIP 0.068UF 50L X7R
C206	065G0805105 22	CHIP 1UF 25V X7R 0805
C611	065G0805105 22	CHIP 1UF 25V X7R 0805
FB304	071G 56G151 A	TB160808G151
FB603	071G 56Z601	CHIP BEAD 600 OHM 0805
FB602	071G 56Z601	CHIP BEAD 600 OHM 0805
FB601	071G 56Z601	CHIP BEAD 600 OHM 0805
FB406	071G 56Z601	CHIP BEAD 600 OHM 0805
FB405	071G 56Z601	CHIP BEAD 600 OHM 0805
FB404	071G 56Z601	CHIP BEAD 600 OHM 0805
FB403	071G 56Z601	CHIP BEAD 600 OHM 0805
FB402	071G 56Z601	CHIP BEAD 600 OHM 0805
FB401	071G 56Z601	CHIP BEAD 600 OHM 0805
FB201	071G 56Z601	CHIP BEAD 600 OHM 0805
D323	093G 39147	TZMC5V6
D322	093G 39147	TZMC5V6
D321	093G 39147	TZMC5V6
D320	093G 39147	TZMC5V6
D318	093G 39147	TZMC5V6
D319	093G 39147	TZMC5V6
D317	093G 39147	TZMC5V6
D322	093G 39149	MLL5232B BY FULL POWER SMT
D321	093G 39149	MLL5232B BY FULL POWER SMT
D320	093G 39149	MLL5232B BY FULL POWER SMT
D319	093G 39149	MLL5232B BY FULL POWER SMT
D318	093G 39149	MLL5232B BY FULL POWER SMT
D317	093G 39149	MLL5232B BY FULL POWER SMT
D323	093G 39149	MLL5232B BY FULL POWER SMT
D304	093G 64 42 P	BAV70 SOT-23
D304	093G 64 42 PP	BAV70 SOT-23
D301	093G 6433P	BAV99
D302	093G 6433P	BAV99
D303	093G 6433P	BAV99
D201	093G1004 3	SS14

D202	093G1020 1 S	GS1D
	715L1237 1 3	MAIN BOARD PCB
U603	056G 643 9	EM6353BZ2SP3B-2.9
FB201	071G 56Z601 M	CHIP BEAD 600OHM
FB401	071G 56Z601 M	CHIP BEAD 600OHM
FB402	071G 56Z601 M	CHIP BEAD 600OHM
FB403	071G 56Z601 M	CHIP BEAD 600OHM
FB404	071G 56Z601 M	CHIP BEAD 600OHM
FB405	071G 56Z601 M	CHIP BEAD 600OHM
FB406	071G 56Z601 M	CHIP BEAD 600OHM
FB601	071G 56Z601 M	CHIP BEAD 600OHM
FB602	071G 56Z601 M	CHIP BEAD 600OHM
FB603	071G 56Z601 M	CHIP BEAD 600OHM
	715L1058 2	KEY BOARD PCB
CN901	087G 501 12 CJ	AC SOCKET
CN901	087G 501 12 RF	AC SOCKET
	095G205S354022	HARNESS
	096G 29 6	H.S. TUBE
	090G6064 1	HEAT SINK
D912	093G 60217	FMB29L 10A 100V SANKEN
D910	093G 60239	FME-210B T0-220
D910	093G 60249	FCH10U15 T0-220
D912	093G 60250	FCH10U10
	0M1G1730 8128 CR3	SCREW
Q903	057G 667 20	AP2761I-A TO-220CFM
Q903	057G 723 3B	2SK2761-01MR
Q903	057G 724 4	2SK2996
Q903	057G 724 4A	STP9NK60ZEP
	090G 407 2	HEAT SINK
	0M1G1730 8128 CR3	SCREW
Q204	056G 566 10	SI4431DY-T1-SMT
Q203	056G 566 10	SI4431DY-T1-SMT
U201	056G 622 1	BA9741F-SMT
Q204	056G 763 4	RSS050P03
Q203	056G 763 4	RSS050P03
Q206	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q205	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q208	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q207	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q202	057G 760 4	DTA144WKA BY ROHM SMT

Q201	057G 760 5	DTC144WKA BY ROHM SMT
Q202	057G 760 4A	DTA144WN3/S SOT-23
Q202	057G 760 4B	PDTA144WK SOT346
Q201	057G 760 5A	DTC 144WN3/S SOT-23
Q201	057G 760 5B	PDTC144WK SOT346
Q204	057G 763 3	AO4411 SO-8
Q203	057G 763 3	AO4411 SO-8
Q204	057G 763 3B	AM9435P.T1-PF SO-8
Q203	057G 763 3B	AM9435P.T1-PF SO-8
R929	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R931	061G0603102	RST CHIP 1K 1/10W 5%
R217	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R216	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R925	061G0603362	RST CHIPR 3.6 KOHM +-5% 1/10W
R212	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R213	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R928	061G0805102	CHIP 1KOHM 1/10W
R927	061G0805102	CHIP 1KOHM 1/10W
R926	061G0805242	RST CHIPR 2.4 KOHM +-5% 1/8W
R924	061G0805333	RST CHIPR 33 KOHM +-5% 1/8W
R209	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R208	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R917	061G1206100	10 OHM 1/8W
R916	061G1206100 3F	RST CHIPR 100 KOHM +-1% 1/4W
R912	061G1206101	100 1206
R930	061G1206101	100 1206
R918	061G1206103	10 KOHM 1/8W
R915	061G1206103	10 KOHM 1/8W
R905	061G1206105	1M 1206
R904	061G1206105	1M 1206
R902	061G1206105	1M 1206
R901	061G1206105	1M 1206
R227	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R226	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R225	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R224	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R228	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R229	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R230	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R231	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W

R909	061G1206472	RST CHIPR 4.7 KOHM +-5% 1/4W
R910	061G1206472	RST CHIPR 4.7 KOHM +-5% 1/4W
R911	061G1206472	RST CHIPR 4.7 KOHM +-5% 1/4W
R906	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
R907	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
C910	065G0805104 32	CHIP 0.1U 50V X7R
C927	065G0805104 32	CHIP 0.1U 50V X7R
C225	065G0805105 27	CHIP 1UF Y5V 0805
C224	065G0805105 27	CHIP 1UF Y5V 0805
C220	065G0805105 27	CHIP 1UF Y5V 0805
C219	065G0805105 27	CHIP 1UF Y5V 0805
C212	065G0805105 27	CHIP 1UF Y5V 0805
C211	065G0805105 27	CHIP 1UF Y5V 0805
C210	065G0805105 27	CHIP 1UF Y5V 0805
C209	065G0805105 27	CHIP 1UF Y5V 0805
C203	065G0805105 27	CHIP 1UF Y5V 0805
D203/D204	093G 39S 3 T	BZT52-C11
D203/D204	093G 39S 8 T	RLZ11B LLDS
ZD904	093G 39S 16 T	SML4737A/1
ZD904	093G 39S 19 T	PTZ7.5B
ZD901	093G 39S 20 T	RLZ22B LLDS
D202	093G2004 1	SMAL240LVXRO-SMT
D201	093G2004 1	SMAL240LVXRO-SMT
D201	093G2004 3	SSM24PT
D202	093G2004 3	SSM24PT
D201	093G2004 2A	SM240A DO-214AC
D202	093G2004 2A	SM240A DO-214AC
D201	093G3004 1	SMAL340XXXRO 3A 40V SMA FULL P
D202	093G3004 1	SMAL340XXXRO 3A 40V SMA FULL P
D201	093G3004 2	SR34 PAN JIT
D202	093G3004 2	SR34 PAN JIT
	PW7425A3E12AI	POWER BOARD
R212	061G 60220152T	CFR 200 OHM +-5% 1/6W
C210	067G 305109 7T	1.0UF +-20% 50V 105 尼ん
C209	067G 305109 7T	1.0UF +-20% 50V 105 尼ん
	715L1144 1 IO	AUDIO BOARD PCB
T901	006G 31502	1.5MM RIVET
Q903	006G 31502	1.5MM RIVET
PT202	006G 31502	1.5MM RIVET
PT201	006G 31502	1.5MM RIVET

NR901	006G 31502	1.5MM RIVET
L902	006G 31502	1.5MM RIVET
C905	006G 31502	1.5MM RIVET
C223	067G215C1514KT	150UF +-20% 25V
C201	067G215C1514KT	150UF +-20% 25V
	715G1103 3 17A	POWER BOARD PCB
R243	061G 17210252T	1K OHM 5% 1/4W
R244	061G 17210252T	1K OHM 5% 1/4W
R908	061G 17268952T	6.8OHM 5% 1/4W
R920	061G 20747052T	47 OHM 1/2W
R922	061G 20747052T	47 OHM 1/2W
R219	061G 60210152T	100OHM +- 5% 1/6W
R218	061G 60210152T	100OHM +- 5% 1/6W
R233	061G 60210252T	CFR 1K OHM +-5% 1/6W
R232	061G 60210252T	CFR 1K OHM +-5% 1/6W
R204	061G 60210352T	CFR 10KOHM +-5% 1/6W
R203	061G 60210352T	CFR 10KOHM +-5% 1/6W
R202	061G 60210352T	CFR 10KOHM +-5% 1/6W
R238	061G 60212352T	12KOHM 5% 1/6W
R239	061G 60212352T	12KOHM 5% 1/6W
R223	061G 60212352T	12KOHM 5% 1/6W
R222	061G 60212352T	12KOHM 5% 1/6W
R221	061G 60215352T	15KOHM 5% 1/6W
R220	061G 60215352T	15KOHM 5% 1/6W
R211	061G 60215352T	15KOHM 5% 1/6W
R210	061G 60215352T	15KOHM 5% 1/6W
R215	061G 60222252T	2.2K 5% 1/6W
R214	061G 60222252T	2.2K 5% 1/6W
R201	061G 60230352T	30KOHM 5% 1/6W
R206	061G 60247352T	47KOHM 5% 1/6W
R205	061G 60247352T	47KOHM 5% 1/6W
R241	061G 60251352T	51KOHM +-5% 1/6W
R240	061G 60251352T	51KOHM +-5% 1/6W
R236	061G 60262152T	620 OHM 5% 1/6W
R237	061G 60262152T	620 OHM 5% 1/6W
R234	061G 60291152T	CFR 910 OHM+-5% 1/6W
R235	061G 60291152T	CFR 910 OHM+-5% 1/6W
FB902	071G 55 19 T	FERRITE BEAD D9X3. 5X0.8
FB901	071G 55 29	FERRITE BEAD
ZD902	093G 39 5452T	HZ12B2-E

ZD903	093G 39 7752T	HZ5C1-E
D901	093G 6026T52T	RECTIFIER DIODE FR107
D902	093G 6038P52T	PS102R
D902	093G 6038T52T	FR103
D205	093G 64 1152T	1N4148
D207	093G 64 1152T	1N4148
D206	093G 64 1152T	1N4148
D903	093G 64 1152T	1N4148
D210	093G 64 1152T	1N4148
D209	093G 64 1152T	1N4148
D208	093G 64 1152T	1N4148
IC903	056G 158 4 T	H431BA
IC903	056G 158 10 T	IC AZ431AZ-AE1 TO-92 BY AAC
Q902	057G 419 PP T	2PC945P
Q901	057G 420 PP T	2PA733P
C911	064G700J1020AT	1000PF 50V PEN
C936	064G700J1040AT	0.1UF 50V PEN
C909	064G700J1040AT	0.1UF 50V PEN
C206	064G700J1040AT	0.1UF 50V PEN
C205	064G700J1040AT	0.1UF 50V PEN
C204	064G700J1040AT	0.1UF 50V PEN
C222	064G701J4740AT	0.47uF 50V
C221	064G701J4740AT	0.47uF 50V
C208	065G 44233113T	330PJNPO 50V
C399	065G 444471 5T	470P/50V DIP
C398	065G 444471 5T	470P/50V DIP
C908	065G 450104 7T	0.1UF +80-20% 50V Y5V
C921	065G517K102 5T6213	1000PF,K,500V,Y5P
C920	065G517K102 5T6213	1000PF,K,500V,Y5P
C921	065G517K102 5T6285	1000PF 10% Y5P 500V
C920	065G517K102 5T6285	1000PF 10% Y5P 500V
C921	065L517K102 5T6052	1000PF 10% Y5P 500V
C920	065L517K102 5T6052	1000PF 10% Y5P 500V
C924	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C926	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C924	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
C926	067G215B4713KT	LOW ESR 470UF16V BY HERMEI
C201	067G215C1514HT	LOW ESR 150UF 25V 8*7MM
C223	067G215C1514HT	LOW ESR 150UF 25V 8*7MM
F901	084G 56 1	FUSE 2A 250V WICKMANN

T76SM4MKC4MNAP

Location	Part No.	Description
	007G 5 L105	COMPOUND PALLET
	007G 5 L108	COMPOUND PALLET
	015G5908 2	BRACKET
	015G6054 L 2	BRACKET
	015G6054 R 2	BRACKET
	015G6068 1 B	MAIN FRAME
	033G4344 GM 1L	HINGE COVER(L)
	033G4344 GM 2L	HINGE COVER(R)
	033G4561 AX L	KEY PAD
	040G 581625 2A	PALLET LABEL
	040G 581689 4A	SERIAL LABEL FOR MONITOR
	040G 581724 1A	CARTON LABEL
	044G3231 15	EVA WASHER
	044G3265 1	EPSCUSHION(L)
	044G3265 2	EPS CUSHION
	044G3265767 4A	CARTON
	044G9003210	CORNER PAPER
	045G 88607	PE BAG FOR MONITOR
	045G 88609 B	EPE COVER
	050G 600 2	HANDLE1
	050G 600 3	HANDLE2
	052G 1185	MIDDLE TAPE FOR CARTON
	052G 1186	SMALL TAPE
	052G 1211 A	165MINIUM TAPE
	052G6025 11523	INSULATE SHEET
	052G6025 11784	MYLAR
	085G6060600 4	SHILED
E089B	089G 715LAA D	SIGNAL CABLE
	089G402A18N IS	POWER CORD
	095G8014 16573	HARNESS
	0B1G1030 5128 CR3	SCREW
	0M1G 330 4128 CR3	SCREW
	0M1G 330 6128 CR3	SCREW
	0M1G1130 6128 CR3	SCREW
	0M1G1140 6128 CR3	SCREW
	0M1G1740 12128 CR3	SCREW
	0Q1G 330 10128 CR3	SCREW
	0Q1G 340 12128 CR3	SCREW

	0Q1G 340 16128 CR3	SCREW
	705GQ7K0B34 14	BACK COVER ASS'Y
	015G5711 1	BASE PLATE
	015G5791 1	VESA BKT
	033G4562 1	POWER LENS
	034G 917 GM L	SUPPORT FRONT
	034G 918 GM L	SUPPORT BACK
	034G 919 GM L	BASE
	037G 448 1	LCD HINGE
E078	078G 311501 K	SPEAKER
	0Q1G 140 10128 CR3	SCREW
	0Q1G1030 10128 CR3	SCREW
	0Q1G1030 12128 CR3	SCREW
	0Q1G1040 8128 CR3	SCREW
	Q34G1081 KG BL	REAR COVER(17")
	Q34G1087 KGA2L	BEZEL(17")
E750L	750GLS70EUG 4	SEC 17" AS7 PANEL
	AUPC786A6P	AUDIO BOARD
CN202	033G802414C H	2*7PIN DUAL ROW RIGHT ANGLE H
U201	056G 616 1	IC E-TDA7496L ST
	090G6059 1	HEAT SINK
CN204	095G8014 3511	HARNESS
	AUPC786A9SMTP	AUDIO BOARD
R208	061G0603102	RST CHIP 1K 1/10W 5%
R207	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W
R201	061G0603183	RST CHIPR 18 KOHM +-5% 1/10W
R210	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
R211	061G0603203	RST CHIPR 20 KOHM +-5% 1/10W
C212	065G0805101 31	CHIP 100PF 50V NPD 0805
C211	065G0805101 31	CHIP 100PF 50V NPD 0805
C213	065G0805104 32	CHIP 0.1U 50V X7R
C203	065G0805104 32	CHIP 0.1U 50V X7R
C206	065G0805474 22	CHIP 0.47UF 25V X7R 0805
C204	065G0805474 22	CHIP 0.47UF 25V X7R 0805
	AUPC786A9AIP	AUDIO BOARD
C209	067G 305109 7T	1.0UF +-20% 50V 105 ㇿ
	715G1144 1 IO	AUIDO BOARD PCB
R212	061G 60220152T	CFR 200 OHM +-5% 1/6W
C210	067G 305109 7T	1.0UF +-20% 50V 105 ㇿ

	CBPC786KS4MFP	CONVERSION BOARD
CN601	033G801714A H	PIN HEADER 2*7 R/A
CN503	033G801724A H	PIN HEADER 24P 2.0mm
CN201	033G8027 12	WAFER 2*6P 2.0MM R/A
CN602	033G8027 16	WAFER 16PIN 2.0mm DIP
	040G 45762412B	CBPC LABEL
C204	067G215B221 4H	LOW E.S.R 220UF +-20% 25V
C202	067G215B221 4H	LOW E.S.R 220UF +-20% 25V
CN301	088G 35315F H	D-SUB 15PIN
X401	093G 22 53 J	14.31818MHZ/32PF/49US
X601	093G 22 55 J	20MHz/20PF/49US
	AIC786KS4MFP	MAIN BOARD
	040G 457624 1B	LABEL-CPU
U401	056G 562 86	TSU16AK PQFP-128 BY MST
U202	056G 563 7	AIC1084-33PM
U201	056G 563 31	AI1117D-1.8-EI
U603	056G 643 9	EM6353BZ2SP3B-2.9
U601	056G1125137 X	W78E065A40PL PLCC44
U301	056G1133 34	M24C02-WMN6TP
U602	056G113356A	24LC16B/SNG SOIC-8PIN
Q204	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q202	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q201	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q602	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q601	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q203	057G 763 1	A03401 SOT23 BY AOS(A1)
RN602	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W
RN601	061G 125472 8	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W
R642	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R502	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R209	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB303	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB302	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
FB301	061G0603000	RST CHIPR 0 OHM +-5% 1/10W
R307	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R309	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R312	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R315	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R634	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R609	061G0603101	RST CHIPR 100 OHM +-5% 1/10W

R608	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R402	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R316	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R639	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R635	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R636	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R306	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R305	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R303	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R302	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R301	061G0603101	RST CHIPR 100 OHM +-5% 1/10W
R624	061G0603102	RST CHIP 1K 1/10W 5%
R311	061G0603102	RST CHIP 1K 1/10W 5%
R310	061G0603102	RST CHIP 1K 1/10W 5%
R203	061G0603102	RST CHIP 1K 1/10W 5%
R605	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R604	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R602	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R601	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R407	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R406	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R405	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R404	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R606	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R607	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R613	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R614	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R615	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R625	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R626	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R627	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R318	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R202	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R204	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R206	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R208	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R211	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R308	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R314	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W
R317	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W

R215	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W
R618	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R617	061G0603121	RST CHIPR 120 OHM +-5% 1/10W
R313	061G0603222	RST CHIPR 2.2 KOHM +-5% 1/10W
R403	061G0603390 0F	RST CHIPR 390 OHM +-1% 1/10W
R304	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R620	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R621	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R622	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R623	061G0603471	RST CHIPR 470 OHM +-5% 1/10W
R201	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R205	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R207	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R212	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R616	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R619	061G0603472	RST CHIPR 4.7KOHM +-5% 1/10W
R325	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R326	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
R327	061G0603750	RST CHIPR 75 OHM +-5% 1/10W
C617	065G0603101 32	100PF +-10% 50V X7R
C610	065G0603102 32	1000PF +-10% 50V X7R
C609	065G0603102 32	1000PF +-10% 50V X7R
C608	065G0603102 32	1000PF +-10% 50V X7R
C607	065G0603102 32	1000PF +-10% 50V X7R
C606	065G0603102 32	1000PF +-10% 50V X7R
C307	065G0603102 32	1000PF +-10% 50V X7R
C408	065G0603104 32	CHIP 0.1UF 50V X7R
C409	065G0603104 32	CHIP 0.1UF 50V X7R
C410	065G0603104 32	CHIP 0.1UF 50V X7R
C411	065G0603104 32	CHIP 0.1UF 50V X7R
C412	065G0603104 32	CHIP 0.1UF 50V X7R
C413	065G0603104 32	CHIP 0.1UF 50V X7R
C415	065G0603104 32	CHIP 0.1UF 50V X7R
C416	065G0603104 32	CHIP 0.1UF 50V X7R
C417	065G0603104 32	CHIP 0.1UF 50V X7R
C418	065G0603104 32	CHIP 0.1UF 50V X7R
C420	065G0603104 32	CHIP 0.1UF 50V X7R
C601	065G0603104 32	CHIP 0.1UF 50V X7R
C511	065G0603104 32	CHIP 0.1UF 50V X7R
C510	065G0603104 32	CHIP 0.1UF 50V X7R

C428	065G0603104 32	CHIP 0.1UF 50V X7R
C426	065G0603104 32	CHIP 0.1UF 50V X7R
C425	065G0603104 32	CHIP 0.1UF 50V X7R
C423	065G0603104 32	CHIP 0.1UF 50V X7R
C421	065G0603104 32	CHIP 0.1UF 50V X7R
C407	065G0603104 32	CHIP 0.1UF 50V X7R
C618	065G0603104 32	CHIP 0.1UF 50V X7R
C613	065G0603104 32	CHIP 0.1UF 50V X7R
C612	065G0603104 32	CHIP 0.1UF 50V X7R
C201	065G0603104 32	CHIP 0.1UF 50V X7R
C203	065G0603104 32	CHIP 0.1UF 50V X7R
C205	065G0603104 32	CHIP 0.1UF 50V X7R
C210	065G0603104 32	CHIP 0.1UF 50V X7R
C406	065G0603104 32	CHIP 0.1UF 50V X7R
C404	065G0603104 32	CHIP 0.1UF 50V X7R
C401	065G0603104 32	CHIP 0.1UF 50V X7R
C313	065G0603104 32	CHIP 0.1UF 50V X7R
C216	065G0603104 32	CHIP 0.1UF 50V X7R
C214	065G0603104 32	CHIP 0.1UF 50V X7R
C212	065G0603104 32	CHIP 0.1UF 50V X7R
C207	065G060310432T	MLCC 0603 CAP 0.1UF K 50V X7R
C402	065G0603220 31	CER1 0603 NP0 50V 22P PM
C403	065G0603220 31	CER1 0603 NP0 50V 22P PM
C602	065G0603220 31	CER1 0603 NP0 50V 22P PM
C604	065G0603220 31	CER1 0603 NP0 50V 22P PM
C312	065G0603221 31	CER1 0603 NP0 50V 220P P
C605	065G0603224 17	CAP:CER 0.22UF-20%-80% 1
C311	065G0603330 31	CER1 0603 NP0 50V 33P PM
C310	065G0603473 32	CHIP 0.047UF 50V X7R
C309	065G0603473 32	CHIP 0.047UF 50V X7R
C308	065G0603473 32	CHIP 0.047UF 50V X7R
C306	065G0603473 32	CHIP 0.047UF 50V X7R
C305	065G0603473 32	CHIP 0.047UF 50V X7R
C304	065G0603473 32	CHIP 0.047UF 50V X7R
C217	065G0603683 32	CHIP 0.068UF 50L X7R
C611	065G0805105 22	CHIP 1UF 25V X7R 0805
C206	065G0805105 22	CHIP 1UF 25V X7R 0805
FB304	071G 56G151 A	TB160808G151
FB603	071G 56Z601	CHIP BEAD 600 OHM 0805
FB406	071G 56Z601	CHIP BEAD 600 OHM 0805

FB405	071G 56Z601	CHIP BEAD 600 OHM 0805
FB404	071G 56Z601	CHIP BEAD 600 OHM 0805
FB403	071G 56Z601	CHIP BEAD 600 OHM 0805
FB402	071G 56Z601	CHIP BEAD 600 OHM 0805
FB401	071G 56Z601	CHIP BEAD 600 OHM 0805
FB201	071G 56Z601	CHIP BEAD 600 OHM 0805
D322	093G 39147	TZMC5V6
D321	093G 39147	TZMC5V6
D320	093G 39147	TZMC5V6
D319	093G 39147	TZMC5V6
D318	093G 39147	TZMC5V6
D317	093G 39147	TZMC5V6
D323	093G 39147	TZMC5V6
D304	093G 64 42 P	BAV70 SOT-23
D303	093G 6433P	BAV99
D302	093G 6433P	BAV99
D301	093G 6433P	BAV99
D201	093G1004 3	SS14
D202	093G1020 1 S	GS1D
	715G1237 2 3	MAIN BOARD PCB
FB601	071G 56K121 M	CHIP BEAD
	KEPC786KD4P	KEY BOARD
JP102	033G3802 4H	WAFER 4P RIGHT ANGLE
CN103	033G8027 14 H	WAFER 14P 2.0MM DIP
SW105	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW101	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW102	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW103	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
SW104	077G 600 1GCJ	TACT SWITCH TSPB-2 -NP
DP101	081G 12 1 GP	LED GP32032M/R003-ZY-33
	AIK786KD4P	KEY BOARD FOR T562*
	715G1058 3	KEY BOARD PCB
	PWPC1742SEE1P	POWER BOARD
CN302	033G3278 3	3P PLUG B3B-XHA/JST
CN204	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN203	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN202	033G8021 2D AC	CONN.2P R/A 87210-0236 D
CN201	033G8021 2D AC	CONN.2P R/A 87210-0236 D
	040G 45762412B	CBPC LABEL
P051	051G 6 4500	RTV 胶

IC902	056G 139 3A	PC123Y22FZOF
IC901	056G 379 53	LD7552BN
Q212	057G 761 6	2SC5706-P-E
Q211	057G 761 6	2SC5706-P-E
Q210	057G 761 6	2SC5706-P-E
Q209	057G 761 6	2SC5706-P-E
R919	061G 2J398 59	0.39 OHM 2W
NR901	061G 58080 WT	8 OHM NCT
R903	061G152M104 64	100KOHM 5% 2W
C904	063G107K474 HS	X2 CAP 0.47UF K 275VAC
C214	063G210J2242AC	FILM CAP 0.22UF J 250V
C213	063G210J2242AC	FILM CAP 0.22UF J 250V
C216	065G 3J2206ET	22PF 5% SL 3KV TDK
C215	065G 3J2206ET	22PF 5% SL 3KV TDK
C218	065G 3J2206ET	22PF 5% SL 3KV TDK
C217	065G 3J2206ET	22PF 5% SL 3KV TDK
C902	065G305M2222E3	Y2,2200PF,M,250VAC
C901	065G305M2222E3	Y2,2200PF,M,250VAC
C913	065G306M4722BP	4700PF +/-20% 400VAC
C922	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C925	067G215L102 3R	LOW E.S.R 1000UF +/-20% 16V
C905	067G305S10114H	100UF +/-20% 400V
L904	073G 253 91 H	CHOKE COIL
L903	073G 253 91 H	CHOKE COIL
L202	073G 253515 S	CHOLE
L201	073G 253515 S	CHOLE
L902	073L 174 26T1G	LINE LILT 0.45MM
PT202	080LL15T 7YSG	X'FMR
PT201	080LL15T 7YSG	X'FMR
T901	080LL17T 2 TG	X'FMR
H1	085G6113 1	SHIELD
CN301	088G 30210K E	PHONE JACK 5PIN
BD901	093G 50460502	KBP206G
CN102	095G8021 12529	HARNESS
	705L 780 57 02	CN901 ASS'Y
CN901	087G 501 12 CJ	AC SOCKET
	095G205S354022	HARNESS
	096G 29 6	H.S. TUBE
	705L 780 57 15	D910/D912 ASS'Y
	090G6064 1	HEAT SINK

D912	093G 60217	FMB29L 10A 100V SANKEN
D910	093G 60250	FCH10U10
	0M1G1730 8128 CR3	SCREW
	705L 780 5702A	Q903 ASS'Y
Q903	057G 724 4A	STP9NK60ZEP
	090G 407 2	HEAT SINK
	0M1G1730 8128 CR3	SCREW
	P1742SEE1SMTP	POWER BOARD FOR SMT
U201	056G 622 1	BA9741F-SMT
Q206	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q205	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q208	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q207	057G 417 6	PMBS3906/PHILIPS-SMT(06)
Q202	057G 760 4B	PDTA144WK SOT346
Q201	057G 760 5B	PDTC144WK SOT346
Q204	057G 763 3B	AM9435P.T1-PF SO-8
Q203	057G 763 3B	AM9435P.T1-PF SO-8
R217	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R216	061G0603221	RST CHIPR 220 OHM +-5% 1/10W
R925	061G0603362	RST CHIPR 3.6 KOHM +-5% 1/10W
R929	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R213	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R212	061G0603392	RST CHIPR 3.9 KOHM +-5% 1/10W
R927	061G0805102	CHIP 1KOHM 1/10W
R928	061G0805102	CHIP 1KOHM 1/10W
R926	061G0805242	RST CHIPR 2.4 KOHM +-5% 1/8W
R924	061G0805333	RST CHIPR 33 KOHM +-5% 1/8W
R208	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R209	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W
R917	061G1206100	10 OHM 1/8W
R911	061G1206100 3F	RST CHIPR 100 KOHM +-1% 1/4W
R918	061G1206103	10 KOHM 1/8W
R916	061G1206104	RST CHIPR 100 KOHM +-5% 1/4W
R902	061G1206105	1M 1206
R901	061G1206105	1M 1206
R231	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R230	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R229	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R228	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R227	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W

R226	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R225	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R224	061G1206152	RST CHIPR 1.5 KOHM +-5% 1/4W
R930	061G1206471	470 1206
R913	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R907	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R906	061G1206514	RST CHIPR 510 KOHM +-5% 1/4W
R905	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
R904	061G1206754	RST CHIPR 750 KOHM +-5% 1/4W
R910	061G1206820 2F	RST CHIPR 82 KOHM +-1% 1/4W
C927	065G0805104 32	CHIP 0.1U 50V X7R
C910	065G0805105 22	CHIP 1UF 25V X7R 0805
C209	065G0805105 27	CHIP 1UF Y5V 0805
C225	065G0805105 27	CHIP 1UF Y5V 0805
C224	065G0805105 27	CHIP 1UF Y5V 0805
C220	065G0805105 27	CHIP 1UF Y5V 0805
C219	065G0805105 27	CHIP 1UF Y5V 0805
C212	065G0805105 27	CHIP 1UF Y5V 0805
C211	065G0805105 27	CHIP 1UF Y5V 0805
C210	065G0805105 27	CHIP 1UF Y5V 0805
C203	065G0805105 27	CHIP 1UF Y5V 0805
D204	093G 39S 3 T	BZT52-C11
D203	093G 39S 3 T	BZT52-C11
ZD904	093G 39S 19 T	PTZ7.5B
D202	093G2004 3	SSM24PT
D201	093G2004 3	SSM24PT
	PW1742SEE1AIP	POWER BOARD FOR AI
T901	006G 31502	1.5MM RIVET
Q903	006G 31502	1.5MM RIVET
PT202	006G 31502	1.5MM RIVET
PT201	006G 31502	1.5MM RIVET
NR901	006G 31502	1.5MM RIVET
L902	006G 31502	1.5MM RIVET
C905	006G 31502	1.5MM RIVET
IC904	056G 158 4 T	H431BA
IC903	056G 158 4 T	H431BA
R243	061G 17210252T	1K OHM 5% 1/4W
R244	061G 17210252T	1K OHM 5% 1/4W
R912	061G 17210252T	1K OHM 5% 1/4W
R909	061G 17224152T	240 OHM 5% 1/4W

R908	061G 17268952T	6.8OHM 5% 1/4W
R920	061G 20747052T	47 OHM 1/2W
R922	061G 20747052T	47 OHM 1/2W
R204	061G 60110352T	RST CFR 10KOHM +-2% 1/6W
R218	061G 60210152T	100OHM +- 5% 1/6W
R219	061G 60210152T	100OHM +- 5% 1/6W
R233	061G 60210252T	CFR 1K OHM +-5% 1/6W
R232	061G 60210252T	CFR 1K OHM +-5% 1/6W
R203	061G 60210352T	CFR 10KOHM +-5% 1/6W
R202	061G 60210352T	CFR 10KOHM +-5% 1/6W
R239	061G 60212352T	12KOHM 5% 1/6W
R238	061G 60212352T	12KOHM 5% 1/6W
R223	061G 60212352T	12KOHM 5% 1/6W
R222	061G 60212352T	12KOHM 5% 1/6W
R221	061G 60215352T	15KOHM 5% 1/6W
R220	061G 60215352T	15KOHM 5% 1/6W
R211	061G 60215352T	15KOHM 5% 1/6W
R210	061G 60215352T	15KOHM 5% 1/6W
R215	061G 60222252T	2.2K 5% 1/6W
R214	061G 60222252T	2.2K 5% 1/6W
R201	061G 60230352T	30KOHM 5% 1/6W
R206	061G 60247352T	47KOHM 5% 1/6W
R205	061G 60247352T	47KOHM 5% 1/6W
R241	061G 60251352T	51KOHM +-5% 1/6W
R240	061G 60251352T	51KOHM +-5% 1/6W
R237	061G 60262152T	620 OHM 5% 1/6W
R236	061G 60262152T	620 OHM 5% 1/6W
R235	061G 60291152T	CFR 910 OHM+-5% 1/6W
R234	061G 60291152T	CFR 910 OHM+-5% 1/6W
C911	064G700J1020AT	1000PF 50V PEN
C204	064G700J1040AT	0.1UF 50V PEN
C206	064G700J1040AT	0.1UF 50V PEN
C205	064G700J1040AT	0.1UF 50V PEN
C936	064G700J1040AT	0.1UF 50V PEN
C222	064G701J4740AT	0.47uF 50V
C221	064G701J4740AT	0.47uF 50V
C906	065G 2K152 1T6921	1.5NF/2KV Y5P +-10%
C208	065G 44233113T	330PJNPO 50V
C912	065G 444331 5T	330P/50V DIP
C399	065G 444471 5T	470P/50V DIP

C398	065G 444471 5T	470P/50V DIP
C908	065G 450104 7T	0.1UF +80-20% 50V Y5V
C921	065G517K102 5T6213	1000PF,K,500V,Y5P
C920	065G517K102 5T6213	1000PF,K,500V,Y5P
C926	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C924	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C223	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
C201	067G215B4713HT	470UF 16V LTR471M1CF11VR 8*11m
FB902	071G 55 19 T	FERRITE BEAD D9X3. 5X0.8
FB901	071G 55 29	FERRITE BEAD
F901	084G 56 1	FUSE 2A 250V WICKMANN
ZD902	093G 39 5452T	HZ12B2-E
ZD903	093G 39 7752T	HZ5C1-E
D901	093G 6026T52T	RECTIFIER DIODE FR107
D902	093G 6038P52T	PS102R
D210	093G 64 1152T	1N4148
D209	093G 64 1152T	1N4148
D208	093G 64 1152T	1N4148
D207	093G 64 1152T	1N4148
D206	093G 64 1152T	1N4148
D205	093G 64 1152T	1N4148
	715G1103 3 17	POWER BOARD PCB
	Q40G 17N767 2B	RATING LABEL
E095	S95G801830518	LVDS ASS'Y
	033F 205 24	A2005H02-2*12P
	033F 303 30TD1	TD00-30H P2407P30
	033F205T 24	A2005T0B-00
	033F303TTD1	TD00-T 2407PS-00
	071F 100510	FERRITE CORE
	040G 58162435A	LABEL
	041G1700767 6A	USER MANUAL
	045G 76 28 RN	PE BAG FO MANUAL/BASE
	089G 17356G554	AUDIO CABLE

12. Different Parts List

Diversity of T782KS4MKWMNA compared with T782KS4MKWMFA		
Location	Part No.	Description
E750L	750LLS70 EU 5	SEC 17" PANEL EU-L11
E750L	750LLS70 EU 6	SEC 17" EU-L11 PANEL
E750L	750LLS70 EU 8	SEC 17" PANEL EU-L11
	CBPC780KS4MN	CONVERSION BOARD
	AIC780KS4MN	MAIN BOARD